

1. Product Features

1.1 Electrical features

- $V_{CES}=650V$
- $I_{C\ nom}=200A / I_{CRM}=400A$
- Low switching losses
- Low inductance
- Fast switching and short tail current
- Integrated NTC temperature sensor
- High power and thermal cycling capability



Figure 1 IGBT Module

1.2 Mechanical features

- Al_2O_3 substrate with low thermal resistance
- Copper base plate

2. Typical Applications

- Switching mode power supply
- Uninterruptible power supply
- AC and DC servo drive amplifier

3. Description

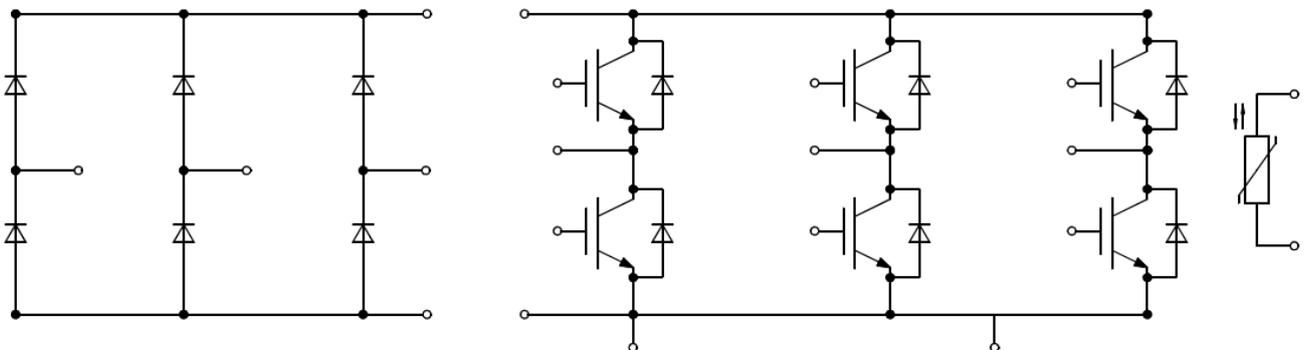


Figure 2 3 Phase Bridge +Rectifier

4. IGBT, Inverter

4.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Collector-emitter voltage 集电极—发射极间电压	$T_{vj} = 25^{\circ}\text{C}$	V_{CES}	650	V
Continuous DC collector current 连续集电极电流	$T_C = 80^{\circ}\text{C}, T_{vj} \text{ max} = 150^{\circ}\text{C}$	$I_{C \text{ nom}}$	200	A
Repetitive peak collector current 集电极峰值电流	$t_P = 1 \text{ ms}$	I_{CRM}	400	A
Total power dissipation 总功率损耗	$T_C = 25^{\circ}\text{C}, T_{vj} \text{ max} = 175^{\circ}\text{C}$	P_{tot}	635	W
Gate-emitter peak voltage 栅极—发射极峰值电压		V_{GES}	+/- 20	V

4.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage 集电极—发射极饱和电压	$I_C = 200 \text{ A}, V_{GE} = 15 \text{ V}$	$V_{CE, \text{sat}}$		$T_{vj} = 25^{\circ}\text{C}$	1.37	V
				$T_{vj} = 125^{\circ}\text{C}$	1.48	V
				$T_{vj} = 150^{\circ}\text{C}$	1.51	V
Gate threshold voltage 栅极阈值电压	$I_C = 3.2 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$	$V_{GE, \text{th}}$	5.0	5.8	6.5	V
Gate charge 栅极电荷	$V_{GE} = -15 \text{ V} \dots +15 \text{ V}$	Q_G		1.51		μC
Internal gate resistor 内部栅极电阻	$T_{vj} = 25^{\circ}\text{C}$	$R_{G \text{ int}}$		2.90		Ω
Input capacitance 输入电容	$f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$	C_{ies}		32.4		nF
Reverse transfer capacitance 反向传输电容	$f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$	C_{res}		0.14		nF
Collector-emitter cut-off current 集电极-发射极截止电流	$V_{CE} = 650 \text{ V}, V_{GE} = 0 \text{ V}, T_{vj} = 25^{\circ}\text{C}$	I_{CES}			1	mA
Gate-emitter leakage current 栅极-发射极漏电流	$V_{CE} = 0 \text{ V}, V_{GE} = 20 \text{ V}, T_{vj} = 25^{\circ}\text{C}$	I_{GES}			100	nA
Turn-on delay time, inductive load 开通延迟时间	$I_C = 200 \text{ A}, V_{CE} = 300 \text{ V}$ $V_{GE} = +15/-15 \text{ V}$ $R_{G, \text{on}} = 1.5 \Omega$	$t_{d, \text{on}}$		$T_{vj} = 25^{\circ}\text{C}$	0.09	μs
				$T_{vj} = 125^{\circ}\text{C}$	0.10	μs
				$T_{vj} = 150^{\circ}\text{C}$	0.11	μs
Rise time, inductive load 上升时间	$I_C = 200 \text{ A}, V_{CE} = 300 \text{ V}$ $V_{GE} = +15/-15 \text{ V}$ $R_{G, \text{on}} = 1.5 \Omega$	t_r		$T_{vj} = 25^{\circ}\text{C}$	0.05	μs
				$T_{vj} = 125^{\circ}\text{C}$	0.05	μs
				$T_{vj} = 150^{\circ}\text{C}$	0.05	μs

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit	
			Min.	Typ.	Max.		
Turn-off delay time, inductive load 关断延迟时间	$I_C = 200A, V_{CE} = 300V$ $V_{GE} = +15/-15V$ $R_{G,off} = 1.5\Omega$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$t_{d,off}$		0.16		us
					0.19		us
					0.20		us
Fall time, inductive load 下降时间	$I_C = 200A, V_{CE} = 300V$ $V_{GE} = +15/-15V$ $R_{G,off} = 1.5\Omega$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	t_f		0.11		us
					0.22		us
					0.26		us
Turn-on energy loss per pulse 开通损耗能量	$I_C = 200A, V_{CE} = 300V, L_s = 30nH$ $V_{GE} = +15/-15V, di/dt = 2970A/\mu s$ $R_{G,on} = 1.5\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	E_{on}		2.09		mJ
					2.12		mJ
					2.14		mJ
Turn-off energy loss per pulse 关断损耗能量	$I_C = 200A, V_{CE} = 300V, L_s = 30nH$ $V_{GE} = +15/-15V, dv/dt = 2860V/\mu s$ $R_{G,off} = 1.5\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	E_{off}		4.15		mJ
					7.05		mJ
					7.80		mJ
SC data 短路数据	$V_{GE} \leq 15V, V_{CC} = 300V, t_P \leq 8 \mu s, T_{vj} = 150^\circ C,$ $C_{GE} = 0.0\mu F, V_{CEmax} = V_{CES} - L_{SCE} \cdot di/dt$	I_{sc}		2026		A	
Thermal resistance, junction to case 结-外壳热阻	Per IGBT	$R_{th,jc}$			0.23	K/W	

5. Diode, Inverter

5.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	$T_{vj} = 25^\circ C$	V_{RRM}	650	V
Continuous DC forward current 连续正向直流电流		I_F	200	A
Repetitive peak forward current 正向重复峰值电流	$t_P = 1 ms$	I_{FRM}	400	A

5.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	$I_F = 200 A, V_{GE} = 0 V$	V_F		1.22		V
				1.19		V
				1.17		V

(table continues...) 待续

Parameter	Note or test condition		Symbol	Values			Unit
				Min.	Typ.	Max.	
Peak reverse recovery current 反向恢复峰值电流	$I_F = 200A, V_R = 300V$	$T_{vj} = 25^\circ C$	I_{RM}		172		A
	$V_{GE} = -15V, -di_F/dt = 2260 A/\mu s$	$T_{vj} = 125^\circ C$			186		A
	$R_{G,off} = 1.5\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 150^\circ C$			190		A
Recovered charge 恢复电荷	$I_F = 200A, V_R = 300V$	$T_{vj} = 25^\circ C$	Q_r		16.6		μC
	$V_{GE} = -15V, -di_F/dt = 2260 A/\mu s$	$T_{vj} = 125^\circ C$			23.3		μC
	$R_{G,off} = 1.5\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 150^\circ C$			25.9		μC
Reverse recovery energy 反向恢复损耗 (每脉冲)	$I_F = 200A, V_R = 300V$	$T_{vj} = 25^\circ C$	E_{rec}		1.07		mJ
	$V_{GE} = -15V, -di_F/dt = 2260 A/\mu s$	$T_{vj} = 125^\circ C$			2.56		mJ
	$R_{G,off} = 1.5\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 150^\circ C$			2.99		mJ
Thermal resistance, junction to case 结—外壳热阻	Per diode		$R_{th,Jc}$			0.38	K/W

6. Diode, Rectifier

6.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	$T_{vj} = 25^\circ C$	V_{RRM}	1600	V
Average Rectified Output current 整流器输出均方根电流	$V_F = 1.2, T_{vj} = 150^\circ C$	I_F	200	A
Surge forward current 正向浪涌电流	$t_p = 10 ms, T_{vj} = 150^\circ C$	I_{FSM}	1344	A
I^2t - value I^2t -值	$t_p = 10 ms, T_{vj} = 150^\circ C$	I^2t	9031	A^2s

6.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	$T_{vj} = 150^\circ C, I_F = 200 A$	V_F		1.0		V
Reverse current 反向电流	$T_{vj} = 150^\circ C, V_R = 1600 V$	I_R		1		mA
Thermal resistance, junction to case 结—外壳热阻	Per diode	$R_{th,Jc}$			0.22	K/W

7. NTC-Thermistor

7.1 Characteristic value


Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Rated resistance 额定电阻值	T _c = 25°C	R ₂₅		5.00		KΩ
Power dissipation 耗散功耗	T _c = 25°C	P ₂₅			20	mW
B-value B-Z 值	$R_2=R_{25}\exp[B_{25/50}(1/T_2-1/(298, 15K))]$	B ₂₅ /B ₅₀		3375		K
B-value B-Z 值	$R_2=R_{25}\exp[B_{25/75}(1/T_2-1/(298, 15K))]$	B ₂₅ /B ₇₅		3408		K
B-value B-Z 值	$R_2=R_{25}\exp[B_{25/100}(1/T_2-1/(298, 15K))]$	B ₂₅ /B ₁₀₀		3436		K



8. Module

8.1 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Isolation Voltage 隔离电压	RMS, f=50HZ,1min	V _{ISOL}			2500	V
Stray inductance module 杂散电感		L _{sCE}		30		nH
Operation Junction Temperature 结温		T _{jop}	-40		150	°C
Storage Temperature Range 存储温度范围		T _{stg}	-40		125	°C
Mounting Torque 安装扭矩	Screw M5	M	3		6	N.m
Weight of Module 重量		G		300		g



9. Characteristics diagrams

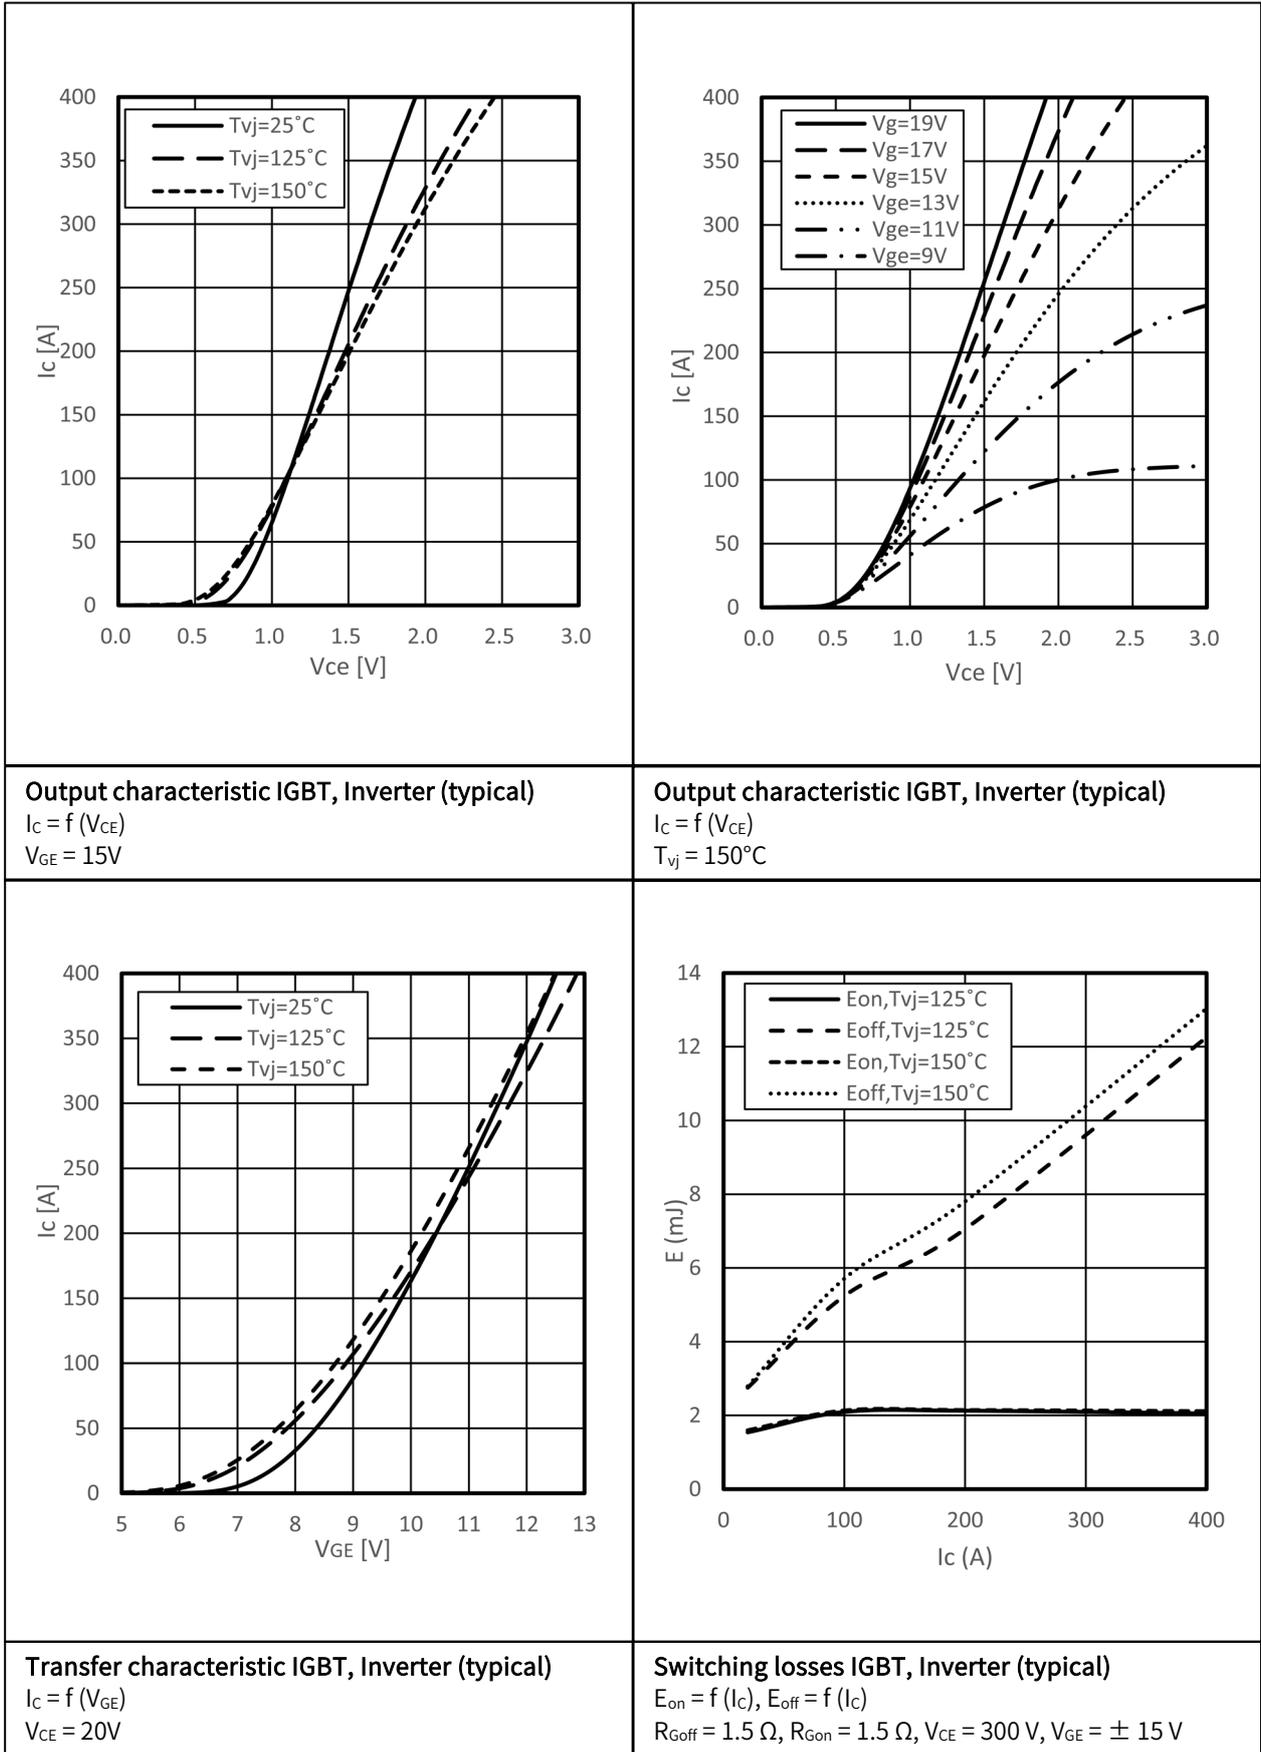

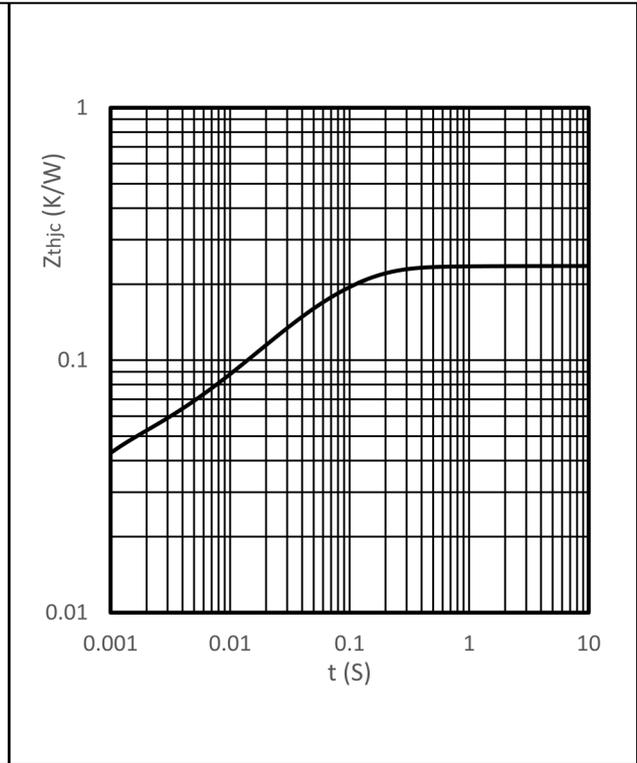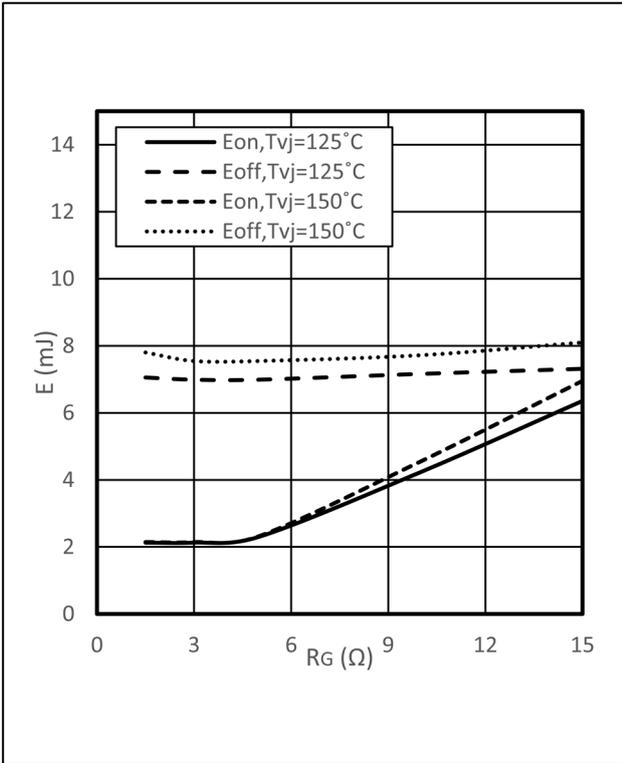





Switching losses IGBT, Inverter (typical)
 $E_{on} = f(R_G)$, $E_{off} = f(R_G)$
 $I_C = 200\text{ A}$, $V_{CE} = 300\text{ V}$, $V_{GE} = \pm 15\text{ V}$


Transient thermal impedance IGBT, Inverter
 $Z_{thjC} = f(t)$

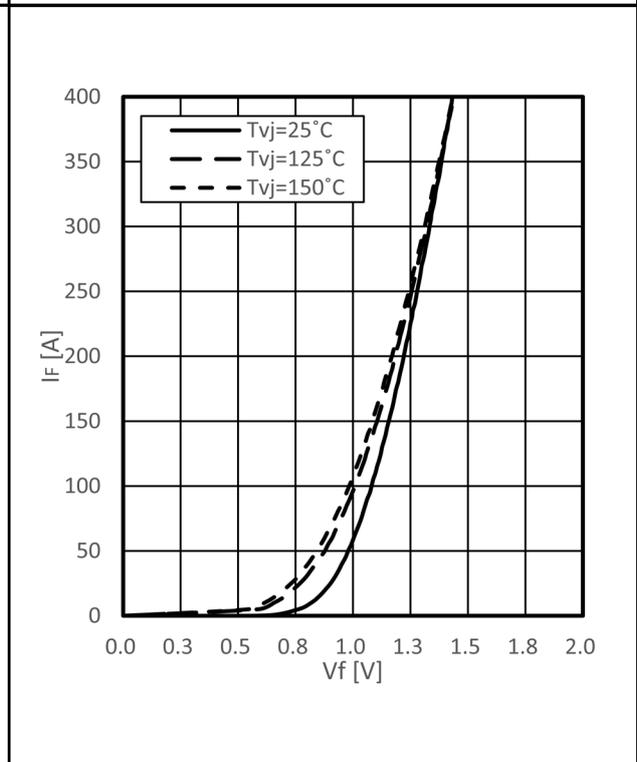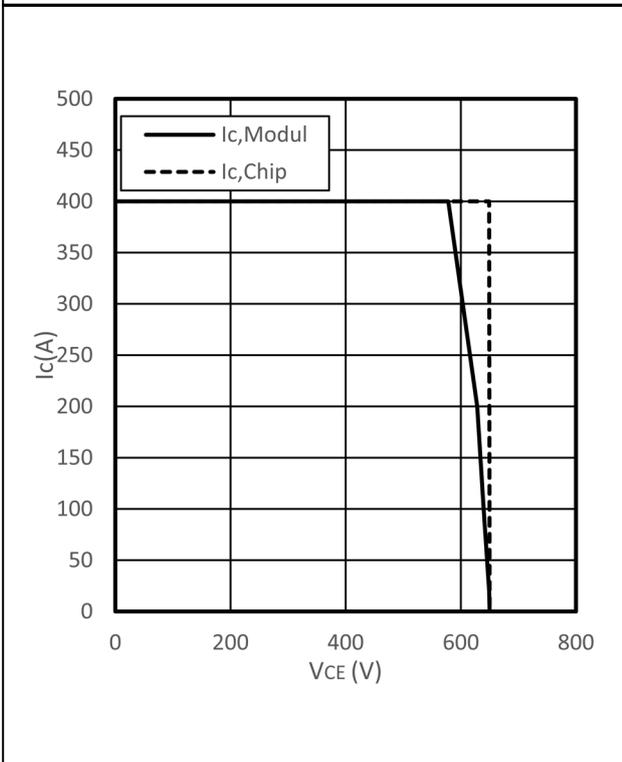

Reverse bias safe operating area IGBT, Inverter (RBSOA)
 $I_C = f(V_{CE})$
 $V_{GE} = 15\text{ V}$, $R_{Goff} = 1.5\ \Omega$, $T_{vj} = 150^\circ\text{C}$

Forward characteristic of Diode, Inverter (typical)
 $I_F = f(V_f)$

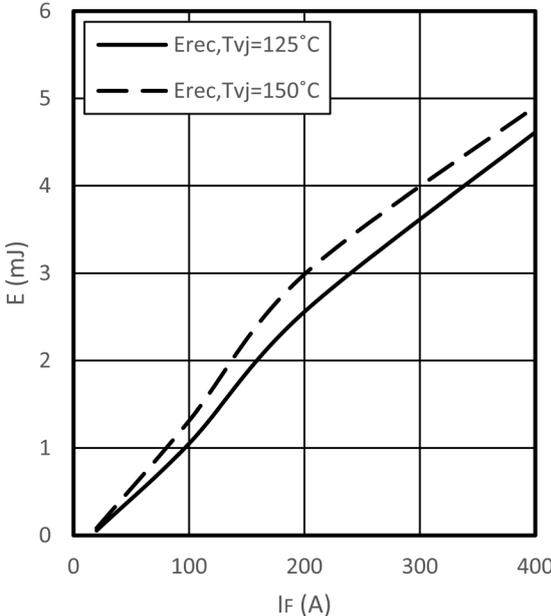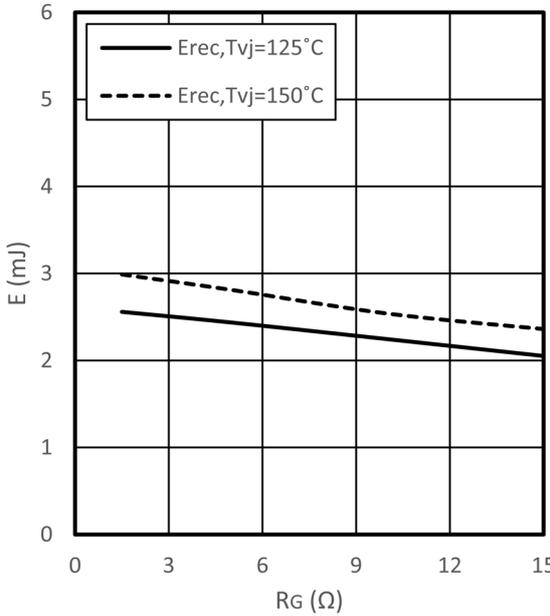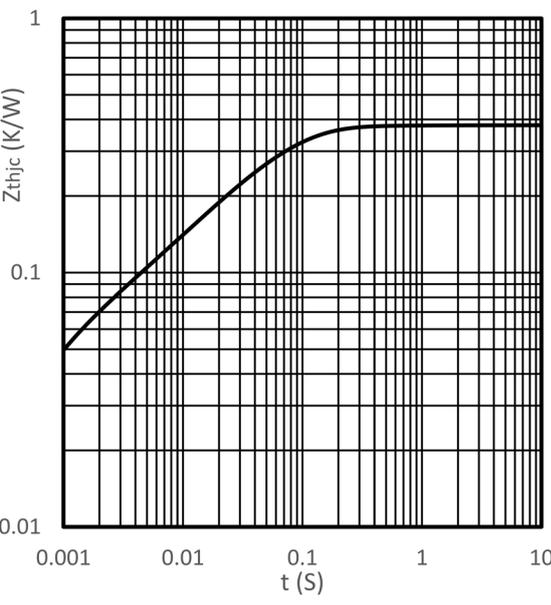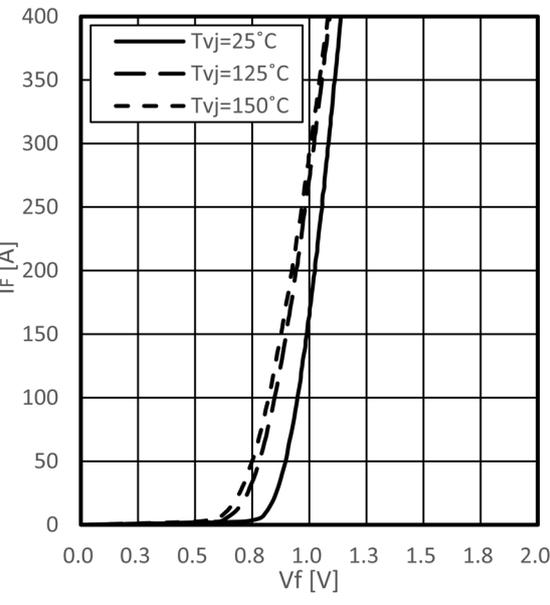	
<p>Switching losses Diode, Inverter (typical) $E_{rec} = f(I_F)$ $R_{Gon} = 1.5 \Omega, V_{CE} = 300 V$</p>	<p>Switching losses Diode, Inverter (typical) $E_{rec} = f(R_G)$ $I_F = 200 A, V_{CE} = 300 V$</p>
	
<p>Transient thermal impedance Diode, Inverter $Z_{thjc} = f(t)$</p>	<p>Forward characteristic of Diode, Rectifier (typical) $I_F = f(V_F)$</p>

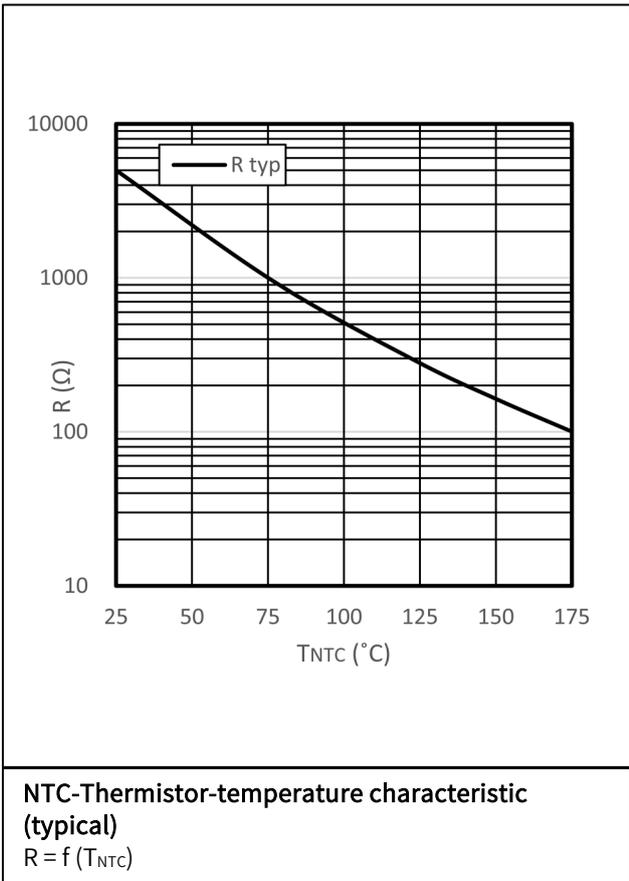

10. Circuit Diagram

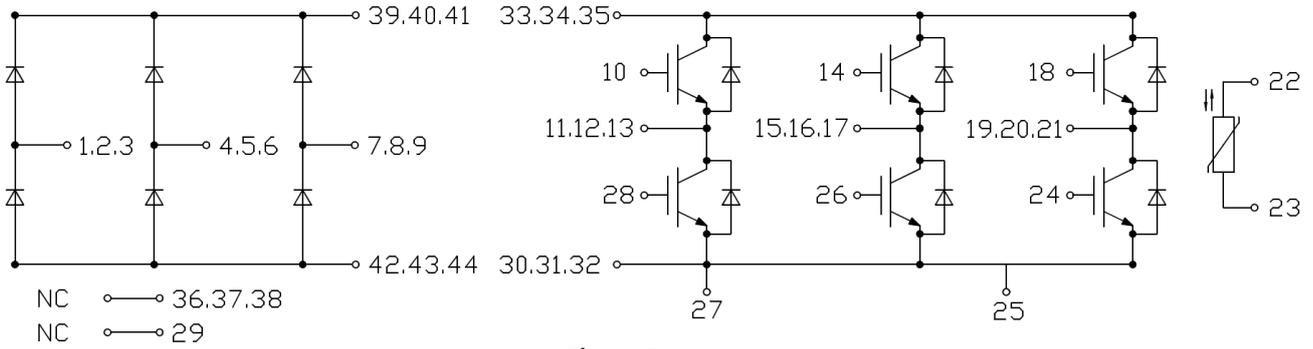


Figure 3

11. Package Outlines

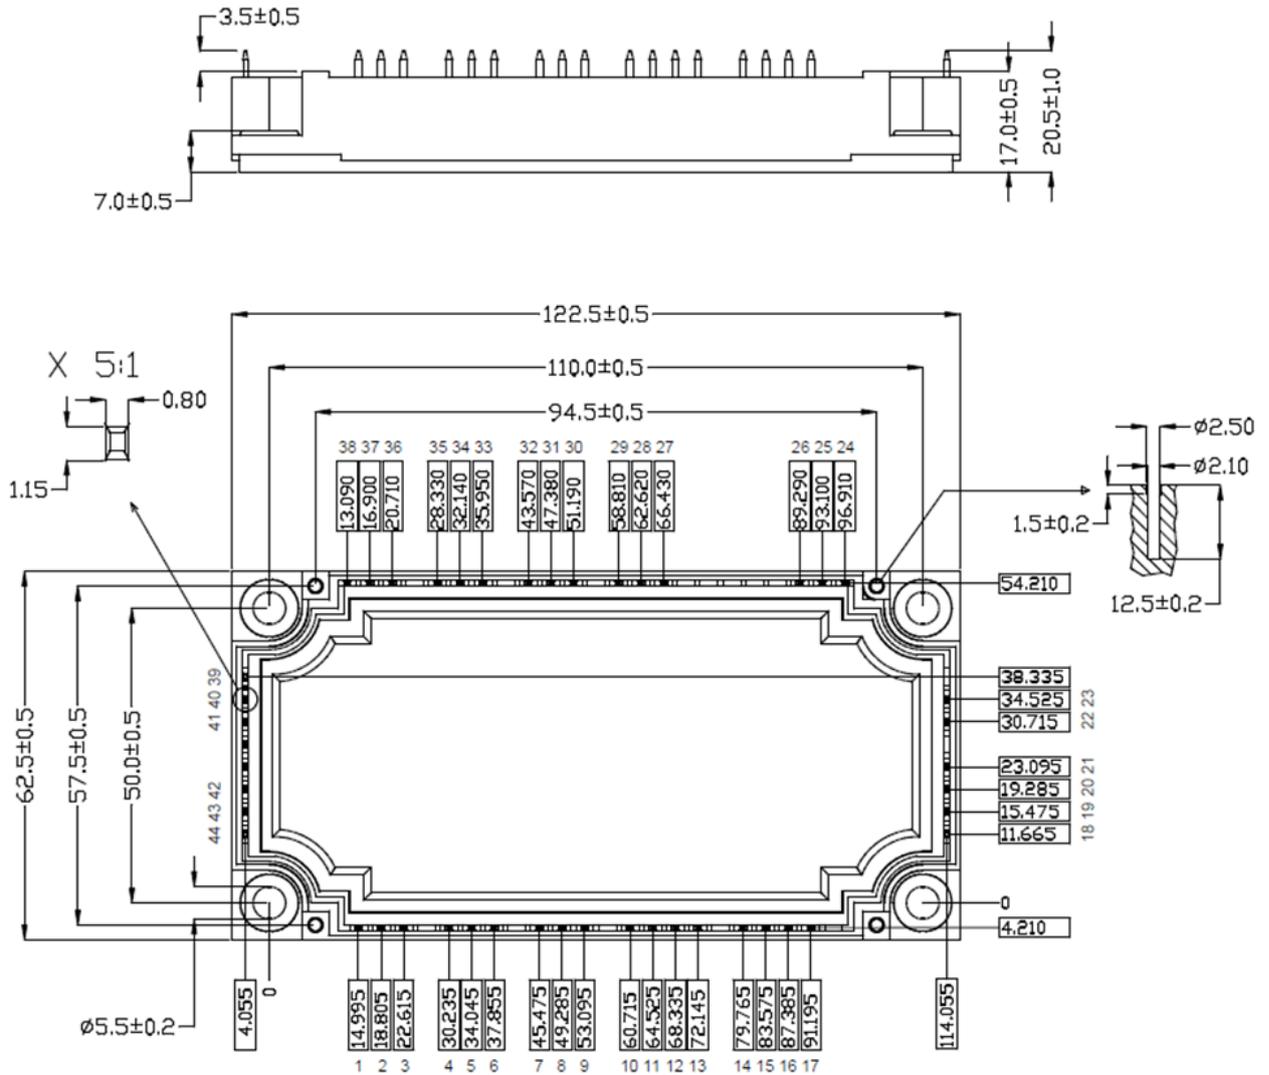


Figure 4