

## 1. Product Features

### 1.1 Electrical features

- $V_{CES}=1200V$
- $I_{C\ nom}=40A / I_{CRM}=80A$
- Low switching losses
- Low inductance
- Fast switching and short tail current
- Integrated NTC temperature sensor
- High power and thermal cycling capability

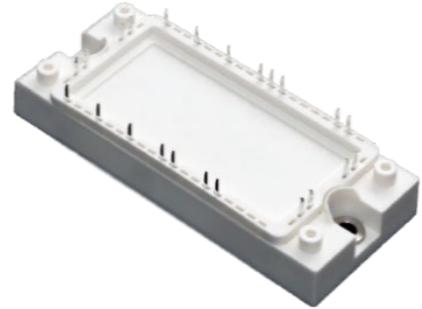


Figure1 IGBT Module

### 1.2 Mechanical features

- $Al_2O_3$  substrate with low thermal resistance
- Copper base plate

## 2. Typical Applications

- Switching mode power supply
- Drive inverters with brake system
- Uninterruptible power supply
- AC and DC servo drive amplifier

## 3. Description

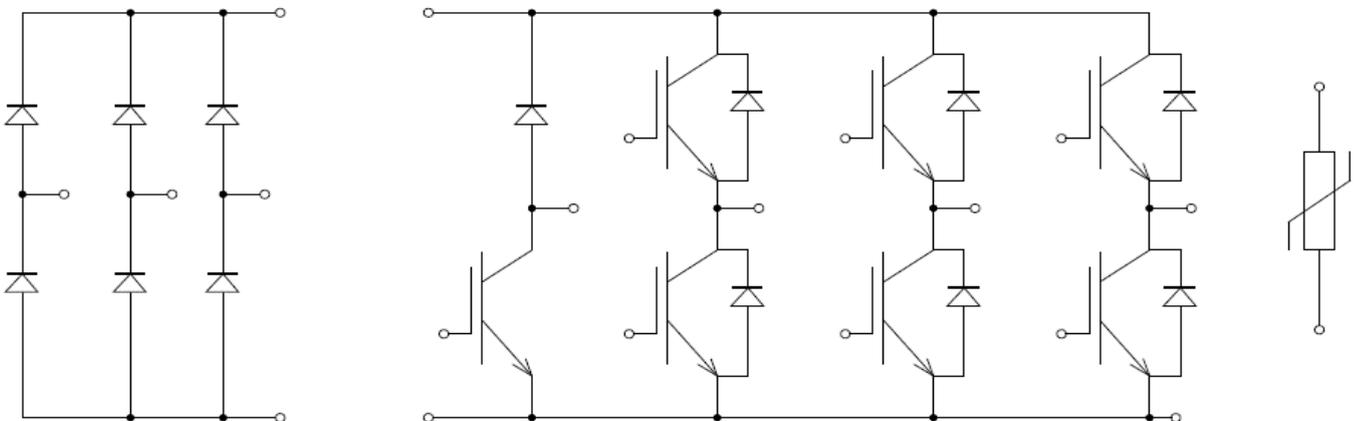


Figure 2 3 Phase Bridge+Rectifier+Brake

## 4. IGBT, Inverter

### 4.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Collector-emitter voltage 集电极—发射极间电压	$T_{vj} = 25^{\circ}\text{C}$	$V_{CES}$	1200	V
Continuous DC collector current 连续集电极电流	$T_C = 100^{\circ}\text{C}, T_{vj} \text{ max} = 150^{\circ}\text{C}$	$I_{C \text{ nom}}$	40	A
Repetitive peak collector current 集电极峰值电流	$t_P = 1 \text{ ms}$	$I_{CRM}$	80	A
Total power dissipation 总功率损耗	$T_C = 25^{\circ}\text{C}, T_{vj} \text{ max} = 150^{\circ}\text{C}$	$P_{\text{tot}}$	300	W
Gate-emitter peak voltage 栅极—发射极峰值电压		$V_{GES}$	+/- 20	V

### 4.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage 集电极—发射极饱和电压	$I_C = 40 \text{ A}, V_{GE} = 15 \text{ V}$	$V_{CE, \text{sat}}$		$T_{vj} = 25^{\circ}\text{C}$	1.58	V
				$T_{vj} = 125^{\circ}\text{C}$	1.80	V
				$T_{vj} = 150^{\circ}\text{C}$	1.86	V
Gate threshold voltage 栅极阈值电压	$I_C = 0.25 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$	$V_{GE, \text{th}}$		5.89		V
Gate charge 栅极电荷	$V_{GE} = -15 \text{ V} \dots +15 \text{ V}$	$Q_G$		0.44		$\mu\text{C}$
Internal gate resistor 内部栅极电阻	$T_{vj} = 25^{\circ}\text{C}$	$R_{G \text{ int}}$		2.2		$\Omega$
Input capacitance 输入电容	$f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$	$C_{\text{ies}}$		6.15		nF
Reverse transfer capacitance 反向传输电容	$f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$	$C_{\text{res}}$		0.08		nF
Collector-emitter cut-off current 集电极-发射极截止电流	$V_{CE} = 1200 \text{ V}, V_{GE} = 0 \text{ V}, T_{vj} = 25^{\circ}\text{C}$	$I_{CES}$			1	mA
Gate-emitter leakage current 栅极-发射极漏电流	$V_{CE} = 0 \text{ V}, V_{GE} = 20 \text{ V}, T_{vj} = 25^{\circ}\text{C}$	$I_{GES}$			100	nA
Turn-on delay time, inductive load 开通延迟时间	$I_C = 40 \text{ A}, V_{CE} = 600 \text{ V}$ $V_{GE} = +15/-15 \text{ V}$ $R_{G, \text{on}} = 15 \Omega$	$t_{d, \text{on}}$		$T_{vj} = 25^{\circ}\text{C}$	0.104	$\mu\text{s}$
				$T_{vj} = 125^{\circ}\text{C}$	0.112	$\mu\text{s}$
				$T_{vj} = 150^{\circ}\text{C}$	0.112	$\mu\text{s}$
Rise time, inductive load 上升时间	$I_C = 40 \text{ A}, V_{CE} = 600 \text{ V}$ $V_{GE} = +15/-15 \text{ V}$ $R_{G, \text{on}} = 15 \Omega$	$t_r$		$T_{vj} = 25^{\circ}\text{C}$	0.048	$\mu\text{s}$
				$T_{vj} = 125^{\circ}\text{C}$	0.056	$\mu\text{s}$
				$T_{vj} = 150^{\circ}\text{C}$	0.056	$\mu\text{s}$

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Turn-off delay time, inductive load 关断延迟时间	I <sub>C</sub> = 40A, V <sub>CE</sub> = 600V V <sub>GE</sub> = +15/-15V R <sub>G,off</sub> = 15Ω	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 125°C T <sub>vj</sub> = 150°C	t <sub>d,off</sub>		0.192	us
					0.216	us
					0.224	us
Fall time, inductive load 下降时间	I <sub>C</sub> = 40A, V <sub>CE</sub> = 600V V <sub>GE</sub> = +15/-15V R <sub>G,off</sub> = 5Ω	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 125°C T <sub>vj</sub> = 150°C	t <sub>f</sub>		0.224	us
					0.368	us
					0.384	us
Turn-on energy loss per pulse 开通损耗能量	I <sub>C</sub> = 40A, V <sub>CE</sub> = 600V, L <sub>S</sub> =35nH V <sub>GE</sub> = +15/-15V, di/dt =633A/μs R <sub>G,on</sub> = 15Ω (T <sub>vj</sub> = 150°C)	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 125°C T <sub>vj</sub> = 150°C	E <sub>on</sub>		5.464	mJ
					7.2	mJ
					7.824	mJ
Turn-off energy loss per pulse 关断损耗能量	I <sub>C</sub> = 40A, V <sub>CE</sub> = 600V, L <sub>S</sub> =35nH V <sub>GE</sub> = +15/-15V, dv/dt =4400V/μs R <sub>G,off</sub> = 15Ω (T <sub>vj</sub> = 150°C)	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 125°C T <sub>vj</sub> = 150°C	E <sub>off</sub>		2.696	mJ
					3.888	mJ
					4.224	mJ
SC data 短路数据	V <sub>GE</sub> ≤ 15V, V <sub>CC</sub> = 600V, t <sub>P</sub> ≤ 8 μs, T <sub>vj</sub> = 150°C, C <sub>GE</sub> = 0.0uF, V <sub>CEmax</sub> = V <sub>CES</sub> - L <sub>SCE</sub> · di/dt	I <sub>sc</sub>		272		A
Thermal resistance, junction to case 结—外壳热阻	Per IGBT	R <sub>th,jc</sub>			0.50	K/W

## 5. Diode, Inverter

### 5.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	T <sub>vj</sub> = 25°C	V <sub>RRM</sub>	1200	V
Continuous DC forward current 连续正向直流电流		I <sub>F</sub>	40	A
Repetitive peak forward current 正向重复峰值电流	t <sub>P</sub> = 1 ms	I <sub>FRM</sub>	80	A

### 5.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	I <sub>F</sub> = 40 A, V <sub>GE</sub> = 0 V	V <sub>F</sub>		1.7	V	
				1.65	V	
				1.58	V	

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Peak reverse recovery current 反向恢复峰值电流	$I_F = 40A, V_R = 600V$ $V_{GE} = -15V, -di_F/dt = 447 A/\mu s$ $(T_{vj}=150^\circ C)$	$I_{RM}$		$T_{vj} = 25^\circ C$	47.2	A
				$T_{vj} = 125^\circ C$	54.4	A
				$T_{vj} = 150^\circ C$	56.8	A
Recovered charge 恢复电荷	$I_F = 40A, V_R = 600V$ $V_{GE} = -15V, -di_F/dt = 447 A/\mu s$ $(T_{vj}=150^\circ C)$	$Q_r$		$T_{vj} = 25^\circ C$	2.88	$\mu C$
				$T_{vj} = 125^\circ C$	5.04	$\mu C$
				$T_{vj} = 150^\circ C$	5.92	$\mu C$
Reverse recovery energy 反向恢复损耗 (每脉冲)	$I_F = 40A, V_R = 600V$ $V_{GE} = -15V, -di_F/dt = 447 A/\mu s$ $(T_{vj}=150^\circ C)$	$E_{rec}$		$T_{vj} = 25^\circ C$	0.4	mJ
				$T_{vj} = 125^\circ C$	0.96	mJ
				$T_{vj} = 150^\circ C$	1.28	mJ
Thermal resistance, junction to case 结-外壳热阻	Per diode	$R_{thJC}$			0.54	K/W

## 6. Diode, Rectifier

### 6.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	$T_{vj} = 25^\circ C$	$V_{RRM}$	1600	V
Average Rectified Output current 整流器输出均方根电流	$V_F = 1.2, T_{vj} = 150^\circ C$	$I_F$	40	A
Surge forward current 正向浪涌电流	$t_p = 10 ms, T_{vj} = 150^\circ C$	$I_{FSM}$	320	A
$I^2t$ - value $I^2t$ -值	$t_p = 10 ms, T_{vj} = 150^\circ C$	$I^2t$	510	$A^2s$

### 6.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	$T_{vj} = 150^\circ C, I_F = 40 A$	$V_F$		1.1		V
Reverse current 反向电流	$T_{vj} = 150^\circ C, V_R = 1600 V$	$I_R$		1		mA
Thermal resistance, junction to case 结-外壳热阻	Per diode	$R_{thJC}$			0.75	K/W

## 7. IGBT, Brake-Chopper

### 7.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Collector-emitter voltage 集电极—发射极间电压	$T_{vj} = 25^{\circ}\text{C}$	$V_{CES}$	1200	V
Continuous DC collector current 连续集电极电流	$T_C = 100^{\circ}\text{C}, T_{vj} \text{ max} = 150^{\circ}\text{C}$	$I_{C \text{ nom}}$	40	A
Repetitive peak collector current 集电极峰值电流	$t_P = 1 \text{ ms}$	$I_{CRM}$	80	A
Total power dissipation 总功率损耗	$T_C = 25^{\circ}\text{C}, T_{vj} \text{ max} = 150^{\circ}\text{C}$	$P_{\text{tot}}$	280	W
Gate-emitter peak voltage 栅极—发射极峰值电压		$V_{GES}$	+/- 20	V

### 7.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage 集电极—发射极饱和电压	$I_C = 40 \text{ A}, V_{GE} = 15 \text{ V}$	$V_{CE, \text{sat}}$		$T_{vj} = 25^{\circ}\text{C}$	1.58	V
				$T_{vj} = 125^{\circ}\text{C}$	1.80	V
				$T_{vj} = 150^{\circ}\text{C}$	1.86	V
Gate threshold voltage 栅极阈值电压	$I_C = 0.25 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$	$V_{GE, \text{th}}$		5.89		V
Gate charge 栅极电荷	$V_{GE} = -15 \text{ V} \dots +15 \text{ V}$	$Q_G$		0.44		$\mu\text{C}$
Internal gate resistor 内部栅极电阻	$T_{vj} = 25^{\circ}\text{C}$	$R_{G \text{ int}}$		2.2		$\Omega$
Input capacitance 输入电容	$f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$	$C_{\text{ies}}$		6.15		nF
Reverse transfer capacitance 反向传输电容	$f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$	$C_{\text{res}}$		0.08		nF
Collector-emitter cut-off current 集电极-发射极截止电流	$V_{CE} = 1200 \text{ V}, V_{GE} = 0 \text{ V}, T_{vj} = 25^{\circ}\text{C}$	$I_{CES}$			1	mA
Gate-emitter leakage current 栅极-发射极漏电流	$V_{CE} = 0 \text{ V}, V_{GE} = 20 \text{ V}, T_{vj} = 25^{\circ}\text{C}$	$I_{GES}$			100	nA
Turn-on delay time, inductive load 开通延迟时间	$I_C = 40 \text{ A}, V_{CE} = 600 \text{ V}$ $V_{GE} = +15/-15 \text{ V}$ $R_{G, \text{on}} = 15 \Omega$	$t_{d, \text{on}}$		$T_{vj} = 25^{\circ}\text{C}$	0.104	$\mu\text{s}$
				$T_{vj} = 125^{\circ}\text{C}$	0.112	$\mu\text{s}$
				$T_{vj} = 150^{\circ}\text{C}$	0.112	$\mu\text{s}$
Rise time, inductive load 上升时间	$I_C = 40 \text{ A}, V_{CE} = 600 \text{ V}$ $V_{GE} = +15/-15 \text{ V}$ $R_{G, \text{on}} = 15 \Omega$	$t_r$		$T_{vj} = 25^{\circ}\text{C}$	0.048	$\mu\text{s}$
				$T_{vj} = 125^{\circ}\text{C}$	0.056	$\mu\text{s}$
				$T_{vj} = 150^{\circ}\text{C}$	0.056	$\mu\text{s}$

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Turn-off delay time, inductive load 关断延迟时间	$I_C = 40A, V_{CE} = 600V$	$T_{vj} = 25^\circ C$		0.192		us
	$V_{GE} = +15/-15V$	$T_{vj} = 125^\circ C$	$t_{d,off}$	0.216		us
	$R_{G,off} = 15\Omega$	$T_{vj} = 150^\circ C$		0.224		us
Fall time, inductive load 下降时间	$I_C = 40A, V_{CE} = 600V$	$T_{vj} = 25^\circ C$		0.224		us
	$V_{GE} = +15/-15V$	$T_{vj} = 125^\circ C$	$t_f$	0.368		us
	$R_{G,off} = 5\Omega$	$T_{vj} = 150^\circ C$		0.384		us
Turn-on energy loss per pulse 开通损耗能量	$I_C = 40A, V_{CE} = 600V, L_s = 35nH$	$T_{vj} = 25^\circ C$		5.464		mJ
	$V_{GE} = +15/-15V, di/dt = 633A/\mu s$	$T_{vj} = 125^\circ C$	$E_{on}$	7.2		mJ
	$R_{G,on} = 15\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 150^\circ C$		7.824		mJ
Turn-off energy loss per pulse 关断损耗能量	$I_C = 40A, V_{CE} = 600V, L_s = 35nH$	$T_{vj} = 25^\circ C$		2.696		mJ
	$V_{GE} = +15/-15V, dv/dt = 4400V/\mu s$	$T_{vj} = 125^\circ C$	$E_{off}$	3.888		mJ
	$R_{G,off} = 15\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 150^\circ C$		4.224		mJ
SC data 短路数据	$V_{GE} \leq 15V, V_{CC} = 600V, t_P \leq 8\mu s, T_{vj} = 150^\circ C,$ $C_{GE} = 0.0\mu F, V_{CEmax} = V_{CES} - L_{sCE} \cdot di/dt$	$I_{sc}$		272		A
Thermal resistance, junction to case 结-外壳热阻	Per IGBT	$R_{th,jc}$			0.52	K/W

## 8. Diode, Brake-Chopper

### 8.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	$T_{vj} = 25^\circ C$	$V_{RRM}$	1200	V
Continuous DC forward current 连续正向直流电流		$I_F$	40	A
Repetitive peak forward current 正向重复峰值电流	$t_P = 1ms$	$I_{FRM}$	80	A

### 8.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	$I_F = 40A, V_{GE} = 0V$	$T_{vj} = 25^\circ C$		1.7		V
		$T_{vj} = 125^\circ C$	$V_F$	1.65		V
		$T_{vj} = 150^\circ C$		1.58		V

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Peak reverse recovery current 反向恢复峰值电流	$I_F = 40A, V_R = 600V$	$T_{vj} = 25^\circ C$		47.2		A
	$V_{GE} = -15V, -di_F/dt = 447 A/\mu s$	$T_{vj} = 125^\circ C$	$I_{RM}$	54.4		A
	$(T_{vj}=150^\circ C)$	$T_{vj} = 150^\circ C$		56.8		A
Recovered charge 恢复电荷	$I_F = 40A, V_R = 600V$	$T_{vj} = 25^\circ C$			2.88	
	$V_{GE} = -15V, -di_F/dt = 447 A/\mu s$	$T_{vj} = 125^\circ C$	$Q_r$	5.04		$\mu C$
	$(T_{vj}=150^\circ C)$	$T_{vj} = 150^\circ C$		5.92		$\mu C$
Reverse recovery energy 反向恢复损耗 (每脉冲)	$I_F = 40A, V_R = 600V$	$T_{vj} = 25^\circ C$			0.4	
	$V_{GE} = -15V, -di_F/dt = 447 A/\mu s$	$T_{vj} = 125^\circ C$	$E_{rec}$	0.96		mJ
	$(T_{vj}=150^\circ C)$	$T_{vj} = 150^\circ C$		1.28		mJ
Thermal resistance, junction to case 结-外壳热阻	Per diode	$R_{th,JC}$				0.63

## 9. NTC-Thermistor

### 9.1 Characteristic value

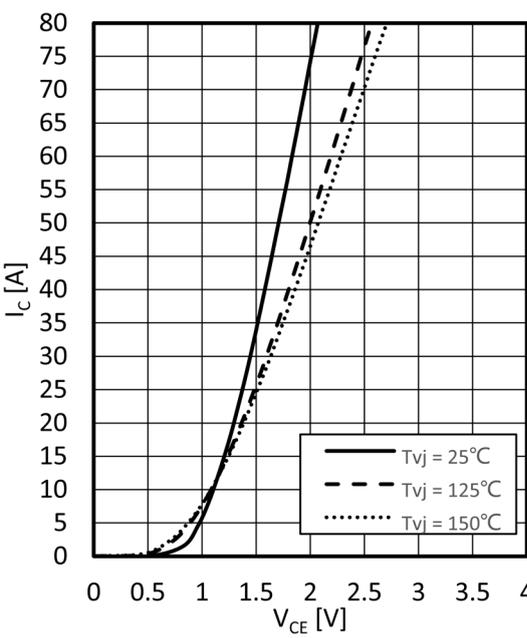
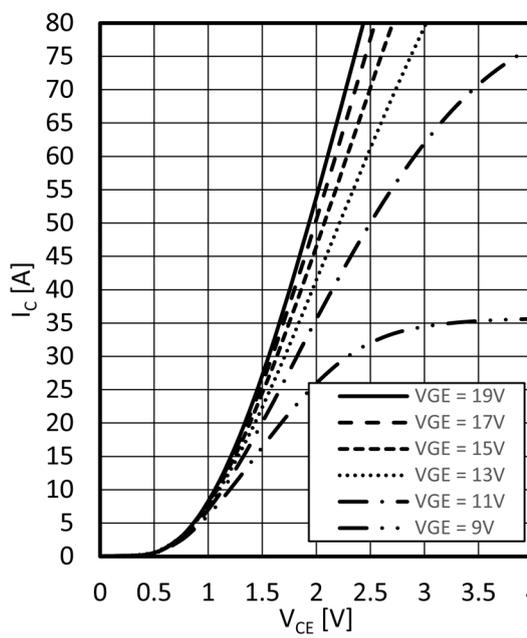
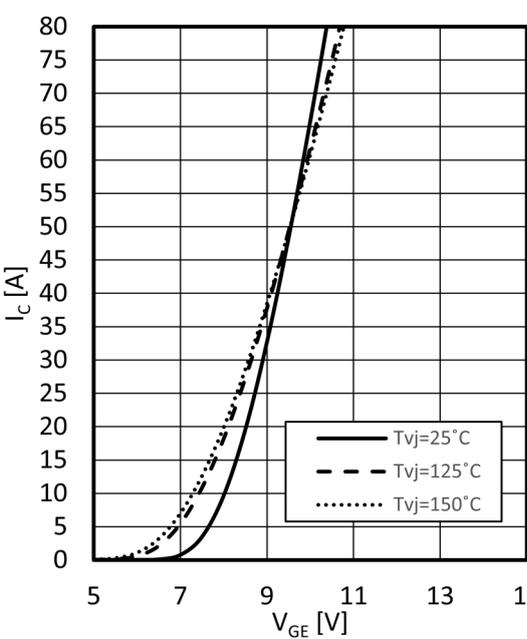
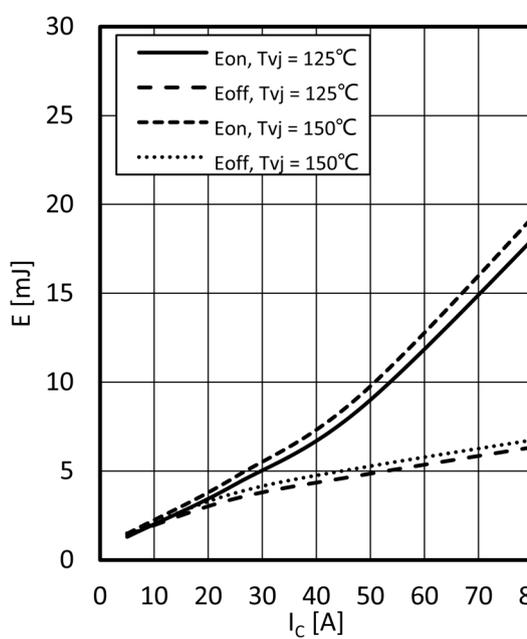
Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Rated resistance 额定电阻值	$T_C = 25^\circ C$	$R_{25}$		5.00		K $\Omega$
Power dissipation 耗散功耗	$T_C = 25^\circ C$	$P_{25}$			20	mW
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298, 15K))]$	$B_{25}/B_{50}$		3400		K
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/75}(1/T_2 - 1/(298, 15K))]$	$B_{25}/B_{75}$		3430		K
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/100}(1/T_2 - 1/(298, 15K))]$	$B_{25}/B_{100}$		3445		K

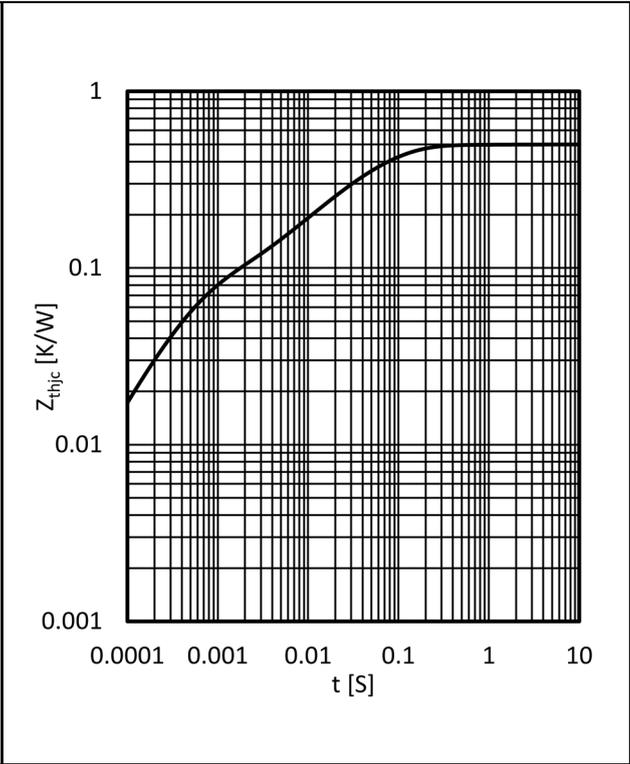
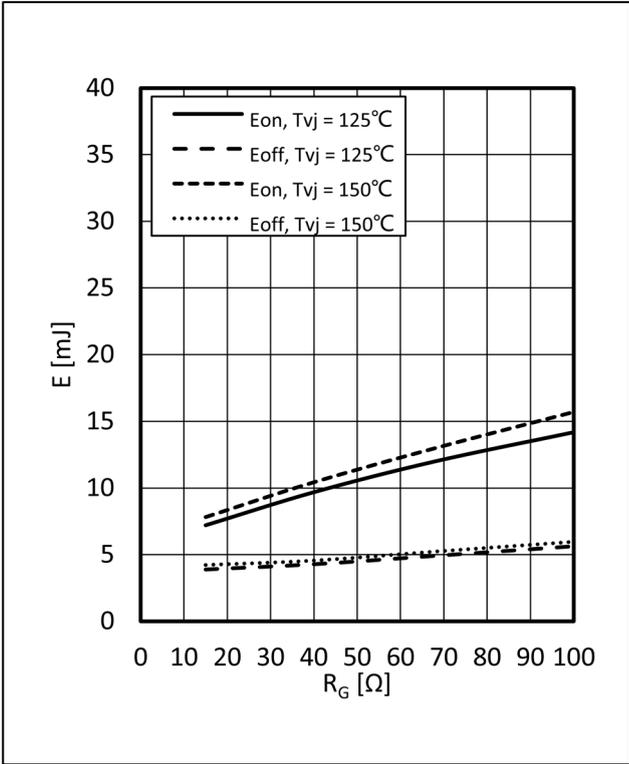
## 10. Module

### 10.1 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Isolation Voltage 隔离电压	RMS, f=50HZ,1min	$V_{ISOL}$			2500	V
Stray inductance module 杂散电感		$L_{SCE}$		35		nH
Operation Junction Temperature 结温		$T_{Jop}$	-40		150	°C
Storage Temperature Range 存储温度范围		$T_{stg}$	-40		125	°C
Mounting Torque 安装扭矩	Screw M5	M	3		6	N.m
Weight of Module 重量		G		180		g

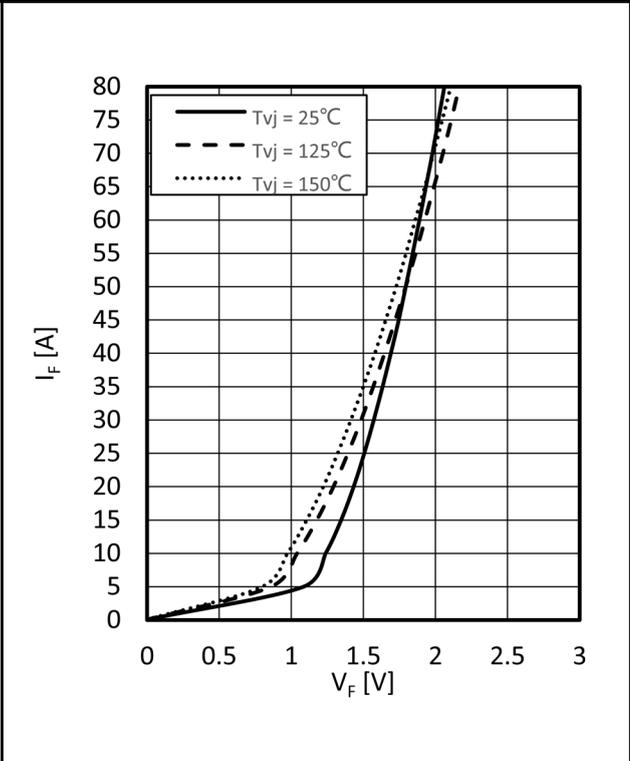
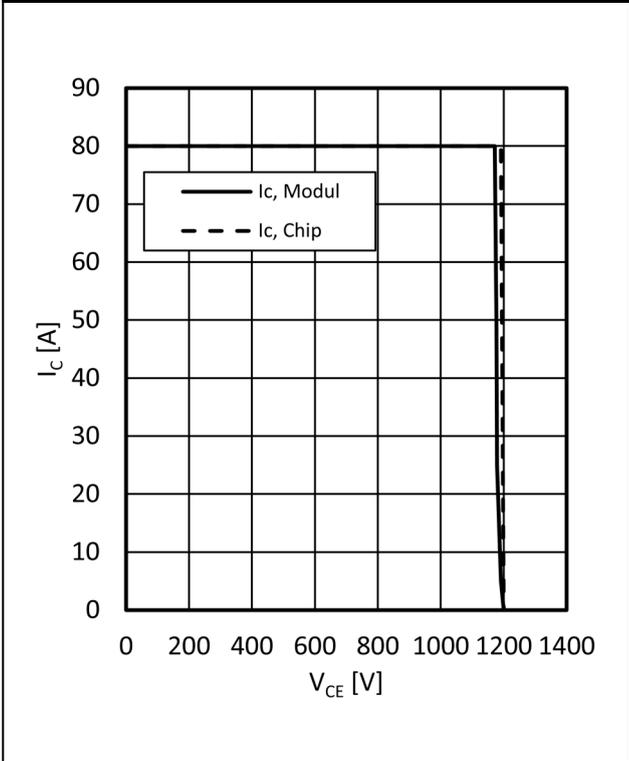
### 11. Characteristics diagrams

	
<p><b>Output characteristic IGBT, Inverter (typical)</b>  <math>I_c = f(V_{ce})</math> <math>V_{ge} = 15V</math></p>	<p><b>Output characteristic IGBT, Inverter (typical)</b>  <math>I_c = f(V_{ce})</math> <math>T_{vj} = 150^\circ C</math></p>
	
<p><b>Transfer characteristic IGBT, Inverter (typical)</b>  <math>I_c = f(V_{ge})</math> <math>V_{ce} = 20V</math></p>	<p><b>Switching losses IGBT, Inverter (typical)</b>  <math>E_{on} = f(I_c)</math>, <math>E_{off} = f(I_c)</math> <math>V_{ge} = \pm 15V</math>, <math>R_{gon} = 15 \Omega</math> <math>R_{goff} = 15 \Omega</math>, <math>V_{ce} = 600V</math></p>



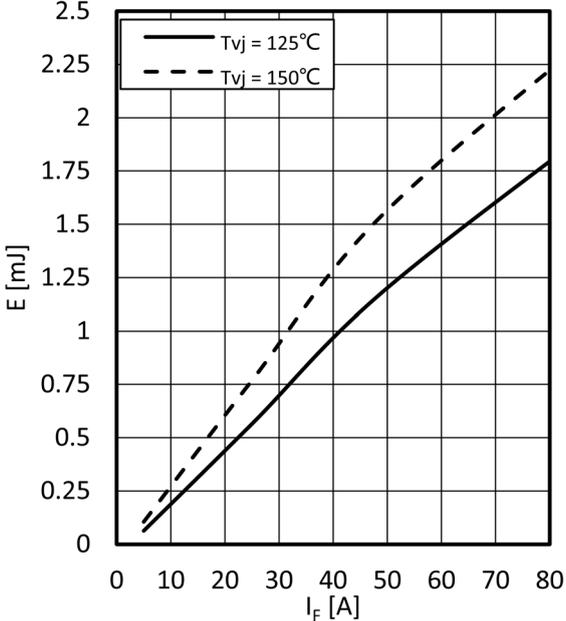
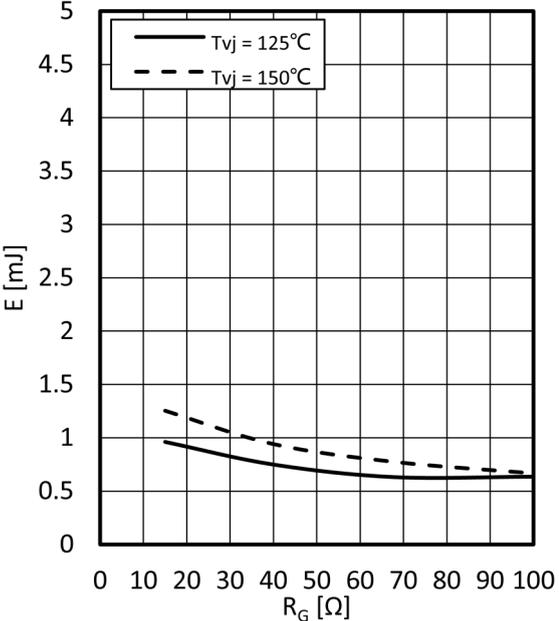
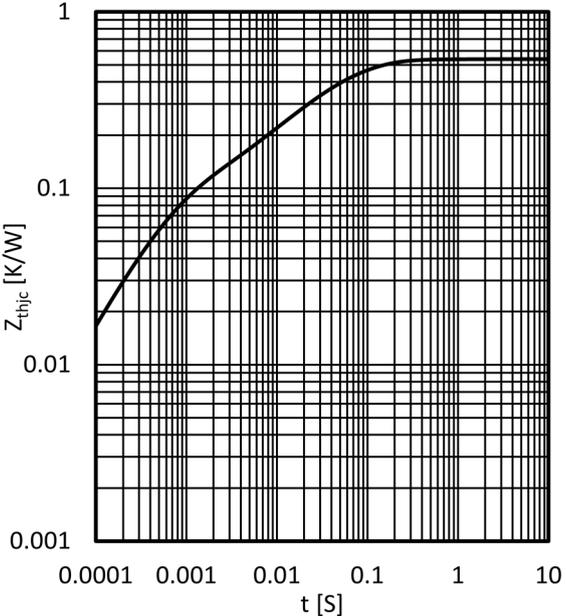
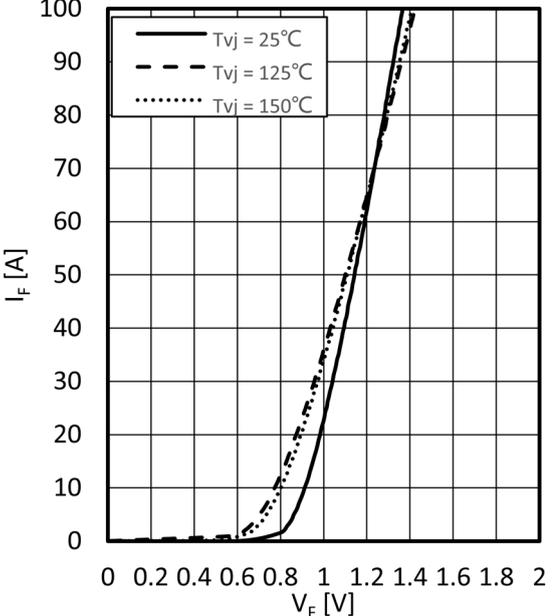
**Switching losses IGBT, Inverter (typical)**  
 $E_{on} = f(R_G), E_{off} = f(R_G) V_{GE} = \pm 15\text{V}, I_C = 40\text{A}, V_{CE} = 600\text{V}$

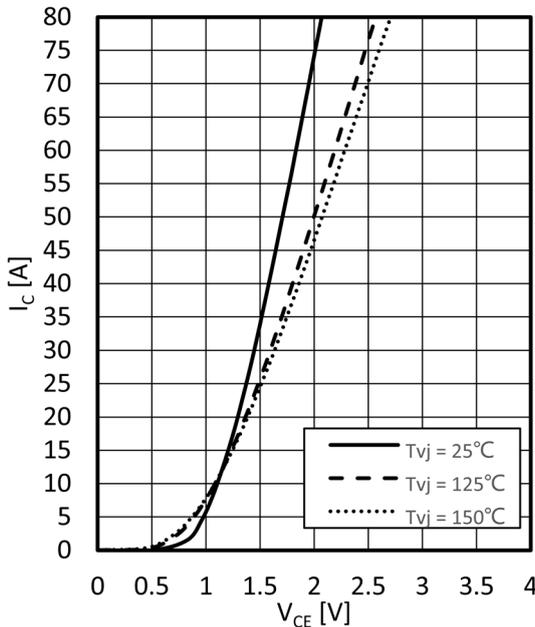
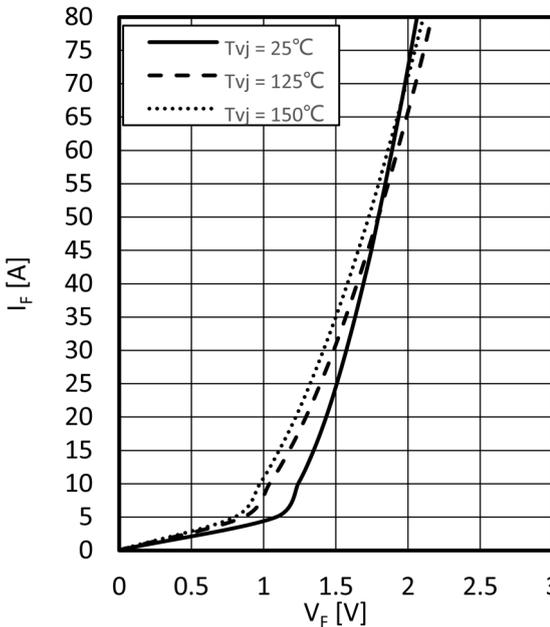
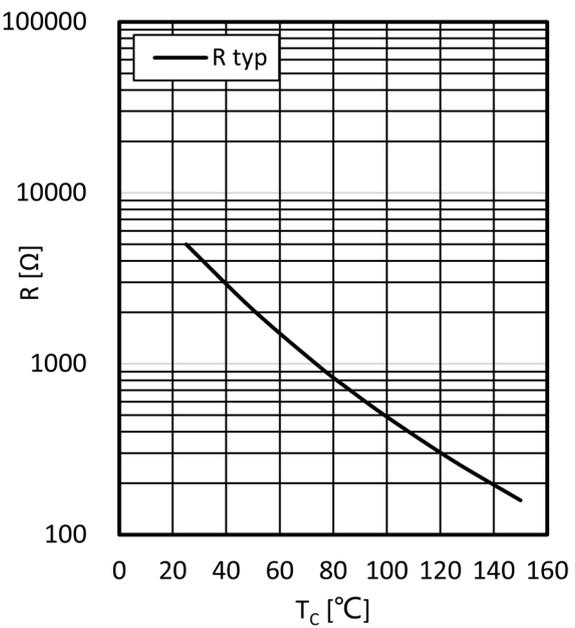
**Transient thermal impedance IGBT, Inverter**  
 $Z_{thjC} = f(t)$



**Reverse bias safe operating area IGBT, Inverter (RBSOA)**  
 $I_C = f(V_{CE}) V_{GE} = \pm 15\text{V} R_{Goff} = 15\Omega, T_{vj} = 150^\circ\text{C}$

**Forward characteristic of Diode, Inverter (typical)**  
 $I_F = f(V_F)$

	
<p><b>Switching losses Diode, Inverter (typical)</b>  <math>E_{rec} = f(I_F)</math> <math>R_{Gon} = 15\Omega</math>, <math>V_{CE} = 600V</math></p>	<p><b>Switching losses Diode, Inverter (typical)</b>  <math>E_{rec} = f(R_G)</math> <math>I_F = 40 A</math>, <math>V_{CE} = 600V</math></p>
	
<p><b>Transient thermal impedance Diode Inverter</b>  <math>Z_{thjC} = f(t)</math></p>	<p><b>Forward characteristic of Diode, Rectifier (typical)</b>  <math>I_F = f(V_F)</math></p>

	
<p><b>Output characteristic IGBT, Brake-Chopper (typical)</b>  <math>I_c = f(V_{CE})</math> <math>V_{GE} = 15V</math></p>	<p><b>Forward characteristic of Diode, Brake-Chopper (typical)</b>  <math>I_F = f(V_F)</math></p>
	
<p><b>NTC-Thermistor-temperature characteristic (typical)</b>  <math>R = f(T)</math></p>	

## 12. Circuit Diagram

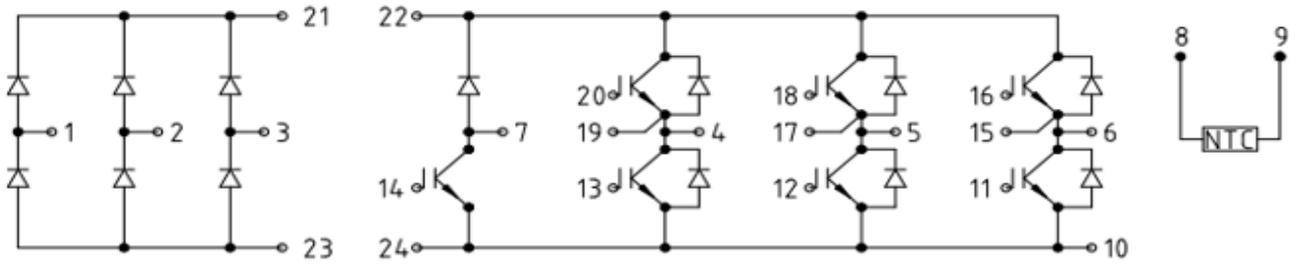


Figure 3

## 13. Package Outlines

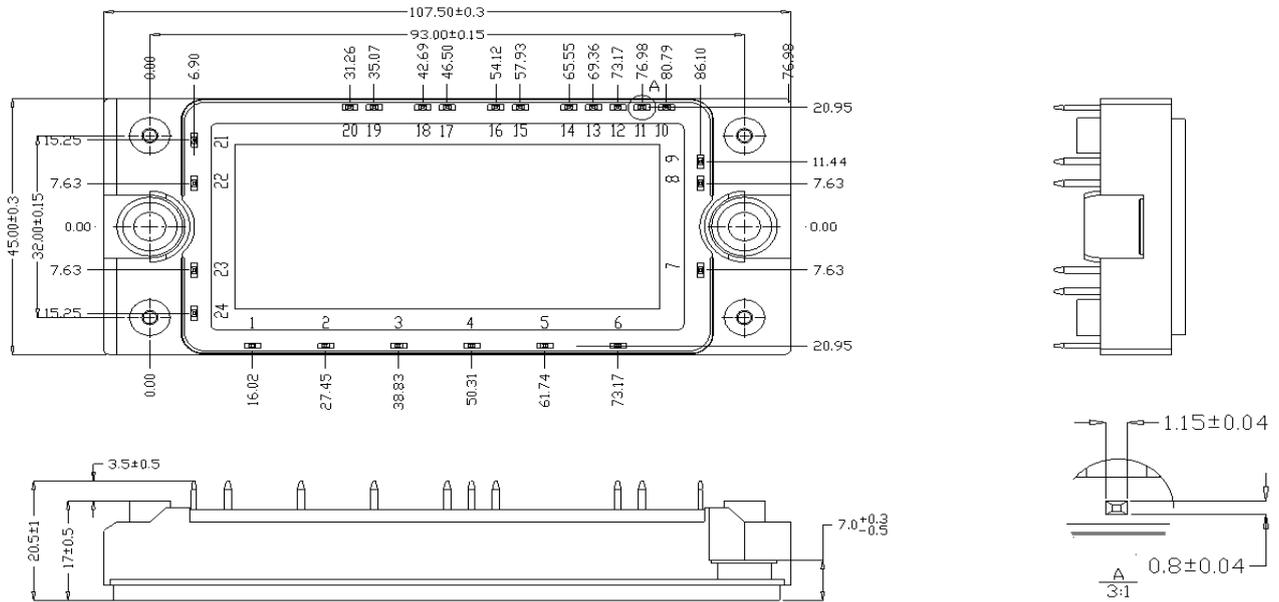


Figure 4