

## 1. Product Features

### 1.1 Electrical features

- $V_{CES}=650V$
- $I_{C\ nom}=75A / I_{CRM}=150A$
- Low switching losses
- Low inductance
- Fast switching and short tail current
- Integrated NTC temperature sensor
- High power and thermal cycling capability

### 1.2 Mechanical features

- $Al_2O_3$  substrate with low thermal resistance
- Copper base plate



Figure 1 IGBT Module

## 2. Typical Applications

- Switching mode power supply
- Drive inverters with brake system
- Uninterruptible power supply
- AC and DC servo drive amplifier

## 3. Description

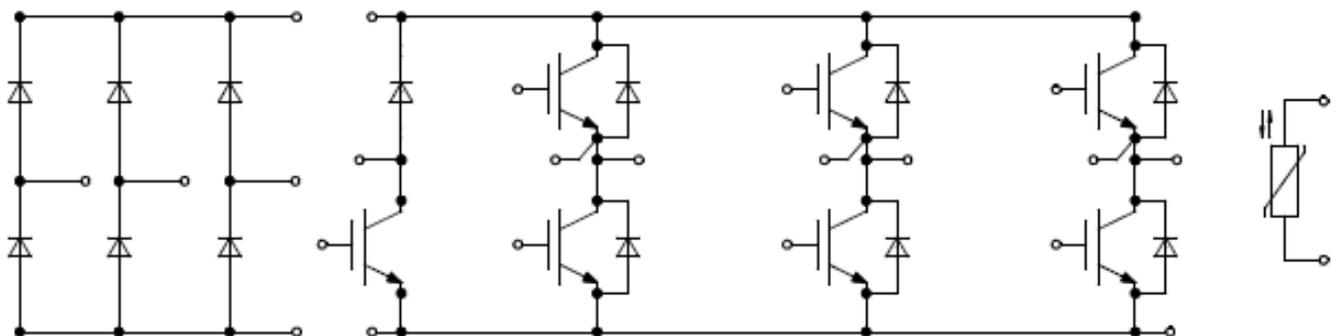


Figure 2 3 Phase Bridge +Rectifier+Brake

## 4. IGBT, Inverter

### 4.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Collector-emitter voltage 集电极—发射极间电压	$T_{vj} = 25^{\circ}\text{C}$	$V_{CES}$	650	V
Continuous DC collector current 连续集电极电流	$T_C = 55^{\circ}\text{C}, T_{vj\ max} = 150^{\circ}\text{C}$	$I_{C\ nom}$	75	A
Repetitive peak collector current 集电极峰值电流	$t_P = 1\ \text{ms}$	$I_{CRM}$	150	A
Total power dissipation 总功率损耗	$T_C = 25^{\circ}\text{C}, T_{vj\ max} = 175^{\circ}\text{C}$	$P_{tot}$	230	W
Gate-emitter peak voltage 栅极—发射极峰值电压		$V_{GES}$	+/- 20	V

### 4.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage 集电极—发射极饱和电压	$I_C = 75\ \text{A}, V_{GE} = 15\ \text{V}$	$V_{CE,sat}$		$T_{vj} = 25^{\circ}\text{C}$	1.67	V
				$T_{vj} = 125^{\circ}\text{C}$	1.87	V
				$T_{vj} = 150^{\circ}\text{C}$	1.94	V
Gate threshold voltage 栅极阈值电压	$I_C = 1\ \text{mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$	$V_{GE,th}$	5.0	6.0	6.5	V
Gate charge 栅极电荷	$V_{GE} = -15\ \text{V} \dots +15\ \text{V}$	$Q_G$		0.15		$\mu\text{C}$
Internal gate resistor 内部栅极电阻	$T_{vj} = 25^{\circ}\text{C}$	$R_{Gint}$		2.20		$\Omega$
Input capacitance 输入电容	$f=1\ \text{MHz}, T_{vj}=25^{\circ}\text{C}, V_{CE}=25\ \text{V}, V_{GE}=0\ \text{V}$	$C_{ies}$		3.93		nF
Reverse transfer capacitance 反向传输电容	$f=1\ \text{MHz}, T_{vj}=25^{\circ}\text{C}, V_{CE}=25\ \text{V}, V_{GE}=0\ \text{V}$	$C_{res}$		0.04		nF
Collector-emitter cut-off current 集电极-发射极截止电流	$V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}, T_{vj} = 25^{\circ}\text{C}$	$I_{CES}$			1	mA
Gate-emitter leakage current 栅极-发射极漏电流	$V_{CE} = 0\ \text{V}, V_{GE} = 20\ \text{V}, T_{vj} = 25^{\circ}\text{C}$	$I_{GES}$			100	nA
Turn-on delay time, inductive load 开通延迟时间	$I_C = 75\ \text{A}, V_{CE} = 300\ \text{V}$ $V_{GE} = +15/-15\ \text{V}$ $R_{G,on} = 8.2\ \Omega$	$t_{d,on}$		$T_{vj} = 25^{\circ}\text{C}$	0.03	$\mu\text{s}$
				$T_{vj} = 125^{\circ}\text{C}$	0.03	$\mu\text{s}$
				$T_{vj} = 150^{\circ}\text{C}$	0.03	$\mu\text{s}$
Rise time, inductive load 上升时间	$I_C = 75\ \text{A}, V_{CE} = 300\ \text{V}$ $V_{GE} = +15/-15\ \text{V}$ $R_{G,on} = 8.2\ \Omega$	$t_r$		$T_{vj} = 25^{\circ}\text{C}$	0.03	$\mu\text{s}$
				$T_{vj} = 125^{\circ}\text{C}$	0.03	$\mu\text{s}$
				$T_{vj} = 150^{\circ}\text{C}$	0.03	$\mu\text{s}$

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit	
			Min.	Typ.	Max.		
Turn-off delay time, inductive load 关断延迟时间	$I_C = 75A, V_{CE} = 300V$ $V_{GE} = +15/-15V$ $R_{G,off} = 8.2\Omega$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$t_{d,off}$		0.10		us
					0.10		us
					0.10		us
Fall time, inductive load 下降时间	$I_C = 75A, V_{CE} = 300V$ $V_{GE} = +15/-15V$ $R_{G,off} = 8.2\Omega$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$t_f$		0.08		us
					0.14		us
					0.15		us
Turn-on energy loss per pulse 开通损耗能量	$I_C = 75A, V_{CE} = 300V, L_s=30nH$ $V_{GE} = +15/-15V, di/dt = 1870A/\mu s$ $R_{G,on} = 8.2\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$E_{on}$		1.67		mJ
					3.16		mJ
					3.61		mJ
Turn-off energy loss per pulse 关断损耗能量	$I_C = 75A, V_{CE} = 300V, L_s=30nH$ $V_{GE} = +15/-15V, dv/dt = 7160V/\mu s$ $R_{G,off} = 8.2\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$E_{off}$		1.02		mJ
					1.58		mJ
					1.66		mJ
SC data 短路数据	$V_{GE} \leq 15V, V_{CC} = 300V, t_P \leq 8 \mu s, T_{vj} = 150^\circ C,$ $C_{GE} = 0.0\mu F, V_{CEmax} = V_{CES} - L_{SCE} \cdot di/dt$	$I_{sc}$		310		A	
Thermal resistance, junction to case 结-外壳热阻	Per IGBT	$R_{th,JC}$			0.65	K/W	

## 5. Diode, Inverter

### 5.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	$T_{vj} = 25^\circ C$	$V_{RRM}$	650	V
Continuous DC forward current 连续正向直流电流		$I_F$	75	A
Repetitive peak forward current 正向重复峰值电流	$t_P = 1 ms$	$I_{FRM}$	150	A

### 5.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	$I_F = 75 A, V_{GE} = 0 V$	$V_F$		1.42		V
				1.20		V
				1.15		V

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit	
			Min.	Typ.	Max.		
Peak reverse recovery current 反向恢复峰值电流	$I_F = 75A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 2180 A/\mu s$ ( $T_{vj} = 150^\circ C$ )	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$I_{RM}$		75.6 113 118	A A A	
Recovered charge 恢复电荷	$I_F = 75A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 2180 A/\mu s$ ( $T_{vj} = 150^\circ C$ )	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$		$Q_r$		2.89 7.76 9.28	$\mu C$ $\mu C$ $\mu C$
Reverse recovery energy 反向恢复损耗 (每脉冲)	$I_F = 75A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 2180 A/\mu s$ ( $T_{vj} = 150^\circ C$ )	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$			$E_{rec}$		0.15 0.61 0.75
Thermal resistance, junction to case 结-外壳热阻	Per diode		$R_{th,Jc}$				

## 6. Diode, Rectifier

### 6.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	$T_{vj} = 25^\circ C$	$V_{RRM}$	1600	V
Average Rectified Output current 整流器输出均方根电流	$V_F = 1.2, T_{vj} = 150^\circ C$	$I_F$	75	A
Surge forward current 正向浪涌电流	$t_p = 10 ms, T_{vj} = 150^\circ C$	$I_{FSM}$	515	A
$I^2t$ - value $I^2t$ -值	$t_p = 10 ms, T_{vj} = 150^\circ C$	$I^2t$	1330	A <sup>2</sup> s

### 6.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	$T_{vj} = 150^\circ C, I_F = 75 A$	$V_F$		1.10		V
Reverse current 反向电流	$T_{vj} = 150^\circ C, V_R = 1600 V$	$I_R$		1.00		mA
Thermal resistance, junction to case 结-外壳热阻	Per diode	$R_{th,Jc}$			0.43	K/W

## 7. IGBT, Brake-Chopper

### 7.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Collector-emitter voltage 集电极—发射极间电压	$T_{vj} = 25^{\circ}\text{C}$	$V_{CES}$	650	V
Continuous DC collector current 连续集电极电流	$T_C = 55^{\circ}\text{C}, T_{vj\ max} = 150^{\circ}\text{C}$	$I_{C\ nom}$	75	A
Repetitive peak collector current 集电极峰值电流	$t_P = 1\ \text{ms}$	$I_{CRM}$	150	A
Total power dissipation 总功率损耗	$T_C = 25^{\circ}\text{C}, T_{vj\ max} = 175^{\circ}\text{C}$	$P_{tot}$	230	W
Gate-emitter peak voltage 栅极—发射极峰值电压		$V_{GES}$	+/- 20	V

### 7.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage 集电极—发射极饱和电压	$I_C = 75\ \text{A}, V_{GE} = 15\ \text{V}$	$V_{CE, sat}$		$T_{vj} = 25^{\circ}\text{C}$	1.67	V
				$T_{vj} = 125^{\circ}\text{C}$	1.87	V
				$T_{vj} = 150^{\circ}\text{C}$	1.94	V
Gate threshold voltage 栅极阈值电压	$I_C = 1\ \text{mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$	$V_{GE, th}$	5.0	6.0	6.5	V
Gate charge 栅极电荷	$V_{GE} = -15\ \text{V} \dots +15\ \text{V}$	$Q_G$		0.15		$\mu\text{C}$
Internal gate resistor 内部栅极电阻	$T_{vj} = 25^{\circ}\text{C}$	$R_{Gint}$		2.20		$\Omega$
Input capacitance 输入电容	$f=1\ \text{MHz}, T_{vj}=25^{\circ}\text{C}, V_{CE}=25\ \text{V}, V_{GE}=0\ \text{V}$	$C_{ies}$		3.93		nF
Reverse transfer capacitance 反向传输电容	$f=1\ \text{MHz}, T_{vj}=25^{\circ}\text{C}, V_{CE}=25\ \text{V}, V_{GE}=0\ \text{V}$	$C_{res}$		0.04		nF
Collector-emitter cut-off current 集电极-发射极截止电流	$V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}, T_{vj} = 25^{\circ}\text{C}$	$I_{CES}$			1	mA
Gate-emitter leakage current 栅极-发射极漏电流	$V_{CE} = 0\ \text{V}, V_{GE} = 20\ \text{V}, T_{vj} = 25^{\circ}\text{C}$	$I_{GES}$			100	nA
Turn-on delay time, inductive load 开通延迟时间	$I_C = 75\ \text{A}, V_{CE} = 300\ \text{V}$ $V_{GE} = +15/-15\ \text{V}$ $R_{G, on} = 8.2\ \Omega$	$t_{d, on}$		$T_{vj} = 25^{\circ}\text{C}$	0.03	$\mu\text{s}$
				$T_{vj} = 125^{\circ}\text{C}$	0.03	$\mu\text{s}$
				$T_{vj} = 150^{\circ}\text{C}$	0.03	$\mu\text{s}$
Rise time, inductive load 上升时间	$I_C = 75\ \text{A}, V_{CE} = 300\ \text{V}$ $V_{GE} = +15/-15\ \text{V}$ $R_{G, on} = 8.2\ \Omega$	$t_r$		$T_{vj} = 25^{\circ}\text{C}$	0.03	$\mu\text{s}$
				$T_{vj} = 125^{\circ}\text{C}$	0.04	$\mu\text{s}$
				$T_{vj} = 150^{\circ}\text{C}$	0.04	$\mu\text{s}$

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Turn-off delay time, inductive load 关断延迟时间	I <sub>C</sub> = 75A, V <sub>CE</sub> = 300V V <sub>GE</sub> = +15/-15V R <sub>G,off</sub> = 8.2Ω	T <sub>vj</sub> = 25°C		0.08		us
		T <sub>vj</sub> = 125°C		0.10		us
		T <sub>vj</sub> = 150°C		0.10		us
Fall time, inductive load 下降时间	I <sub>C</sub> = 75A, V <sub>CE</sub> = 300V V <sub>GE</sub> = +15/-15V R <sub>G,off</sub> = 8.2Ω	T <sub>vj</sub> = 25°C		0.06		us
		T <sub>vj</sub> = 125°C		0.15		us
		T <sub>vj</sub> = 150°C		0.15		us
Turn-on energy loss per pulse 开通损耗能量	I <sub>C</sub> = 75A, V <sub>CE</sub> = 300V, L <sub>S</sub> =30nH V <sub>GE</sub> = +15/-15V, di/dt = 1660A/μs R <sub>G,on</sub> = 8.2Ω (T <sub>vj</sub> = 150°C)	T <sub>vj</sub> = 25°C		2.55		mJ
		T <sub>vj</sub> = 125°C		4.14		mJ
		T <sub>vj</sub> = 150°C		4.57		mJ
Turn-off energy loss per pulse 关断损耗能量	I <sub>C</sub> = 75A, V <sub>CE</sub> = 300V, L <sub>S</sub> =30nH V <sub>GE</sub> = +15/-15V, dv/dt = 7380V/μs R <sub>G,off</sub> = 8.2Ω (T <sub>vj</sub> = 150°C)	T <sub>vj</sub> = 25°C		1.00		mJ
		T <sub>vj</sub> = 125°C		1.54		mJ
		T <sub>vj</sub> = 150°C		1.65		mJ
SC data 短路数据	V <sub>GE</sub> ≤ 15V, V <sub>CC</sub> = 300V, t <sub>P</sub> ≤ 8 μs, T <sub>vj</sub> = 150°C, C <sub>GE</sub> = 0.0μF, V <sub>CEmax</sub> = V <sub>CES</sub> - L <sub>SCE</sub> · di/dt	I <sub>sc</sub>		280		A
Thermal resistance, junction to case 结-外壳热阻	Per IGBT	R <sub>th,JC</sub>			0.65	K/W

## 8. Diode, Brake-Chopper

### 8.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	T <sub>vj</sub> = 25°C	V <sub>RRM</sub>	650	V
Continuous DC forward current 连续正向直流电流		I <sub>F</sub>	50	A
Repetitive peak forward current 正向重复峰值电流	t <sub>P</sub> = 1 ms	I <sub>FRM</sub>	100	A

### 8.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	I <sub>F</sub> = 50 A, V <sub>GE</sub> = 0 V	T <sub>vj</sub> = 25°C		1.43		V
		T <sub>vj</sub> = 125°C		1.23		V
		T <sub>vj</sub> = 150°C		1.19		V

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit	
			Min.	Typ.	Max.		
Peak reverse recovery current 反向恢复峰值电流	$I_F = 50A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 980 A/\mu s$ $(T_{vj}=150^\circ C)$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$I_{RM}$		71.0		A
					62.4		A
					64.8		A
Recovered charge 恢复电荷	$I_F = 50A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 980 A/\mu s$ $(T_{vj}=150^\circ C)$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$Q_r$		3.3		$\mu C$
					5.27		$\mu C$
					6.24		$\mu C$
Reverse recovery energy 反向恢复损耗 (每脉冲)	$I_F = 50A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 980 A/\mu s$ $(T_{vj}=150^\circ C)$	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	$E_{rec}$		0.9		mJ
					0.36		mJ
					0.47		mJ
Thermal resistance, junction to case 结-外壳热阻	Per diode	$R_{th,jc}$				0.92	K/W

## 9. NTC-Thermistor

### 9.1 Characteristic value


Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Rated resistance 额定电阻值	$T_c = 25^\circ C$	$R_{25}$		5.00		K $\Omega$
Power dissipation 耗散功耗	$T_c = 25^\circ C$	$P_{25}$			20	mW
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298, 15K))]$	$B_{25}/B_{50}$		3400		K
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/75}(1/T_2 - 1/(298, 15K))]$	$B_{25}/B_{75}$		3430		K
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/100}(1/T_2 - 1/(298, 15K))]$	$B_{25}/B_{100}$		3445		K


## 10. Module

### 10.1 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Isolation Voltage 隔离电压	RMS, f=50HZ,1min	V <sub>ISOL</sub>			2500	V
Stray inductance module 杂散电感		L <sub>sCE</sub>		40		nH
Operation Junction Temperature 结温		T <sub>jop</sub>	-40		150	°C
Storage Temperature Range 存储温度范围		T <sub>stg</sub>	-40		125	°C
Mounting Torque 安装扭矩	Screw M5	M	3		6	N.m
Weight of Module 重量		G		300		g


## 11. Characteristics diagrams

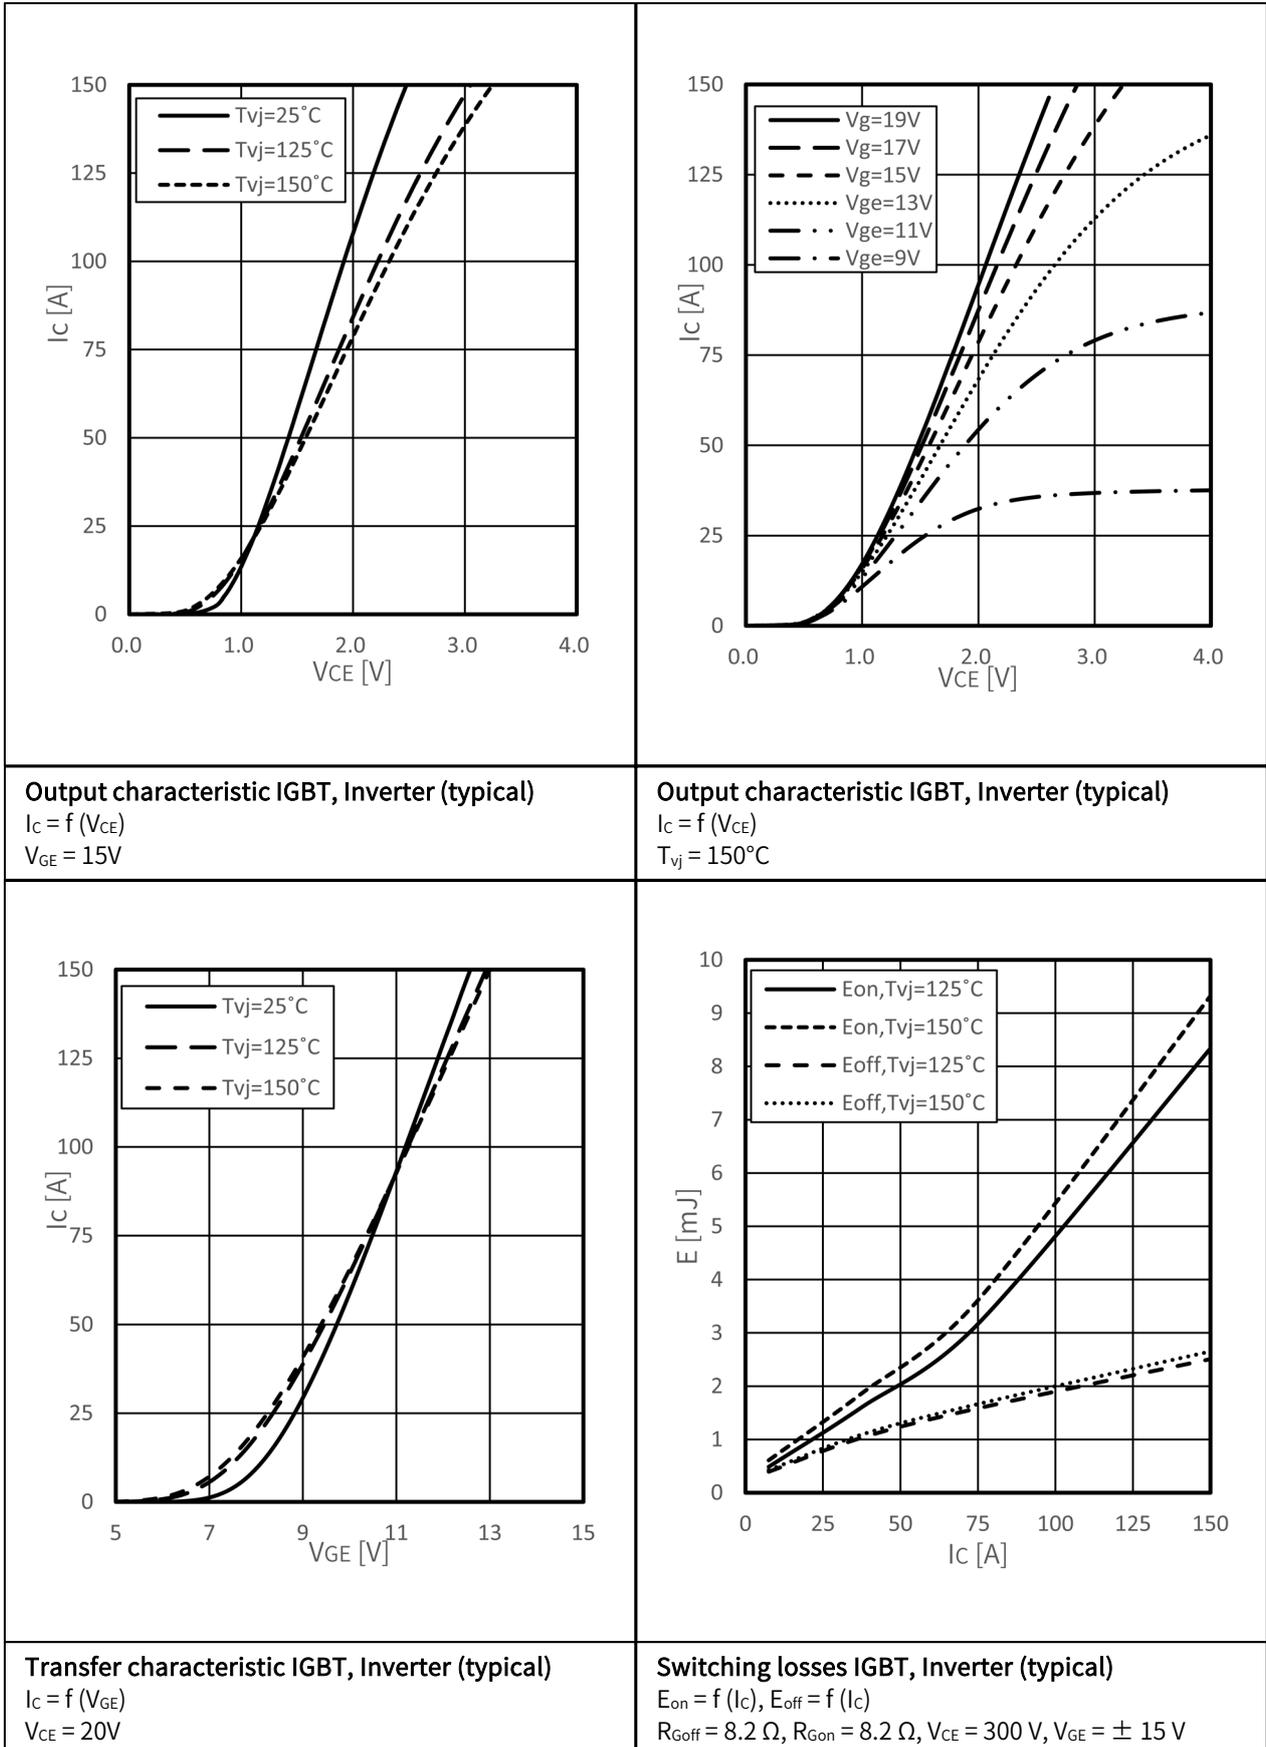

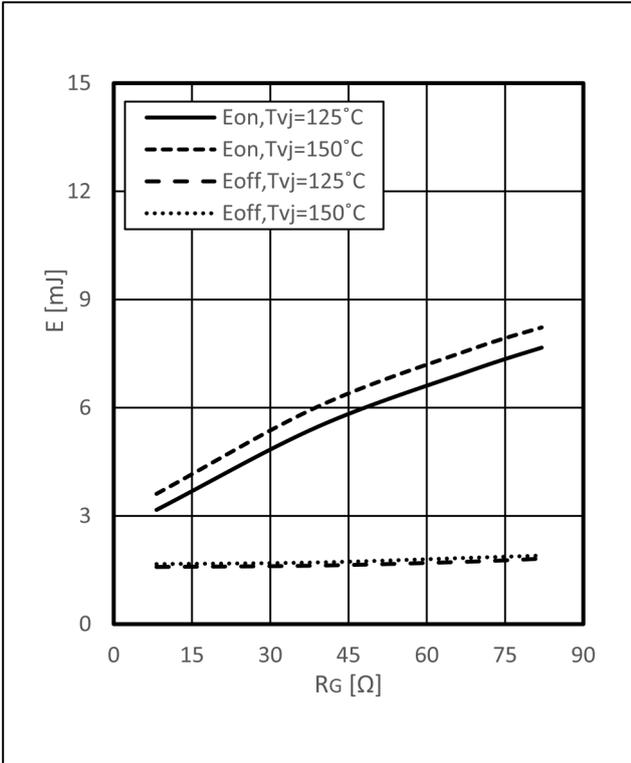


Switching losses IGBT, Inverter (typical)

$E_{on} = f(R_G)$ ,  $E_{off} = f(R_G)$   
 $I_C = 75 A$ ,  $V_{CE} = 300 V$ ,  $V_{GE} = \pm 15 V$

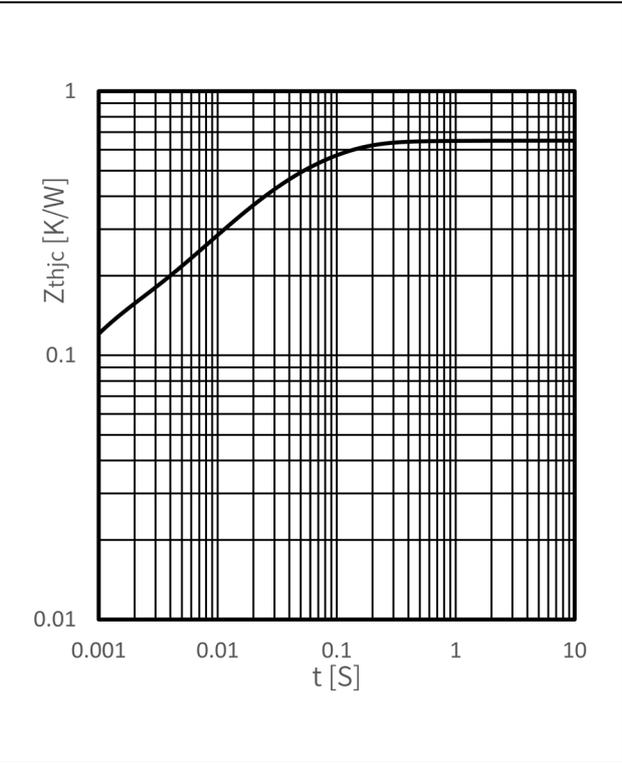


Transient thermal impedance IGBT, Inverter

$Z_{thjc} = f(t)$

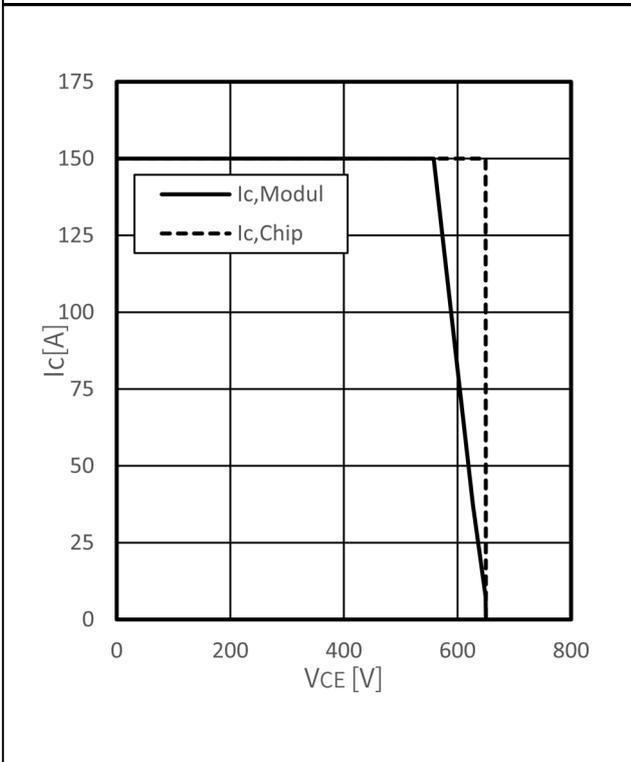


Reverse bias safe operating area IGBT, Inverter (RBSOA)

$I_C = f(V_{CE})$   
 $V_{GE} = 15 V$ ,  $R_{Goff} = 8.2 \Omega$ ,  $T_{vj} = 150^\circ C$

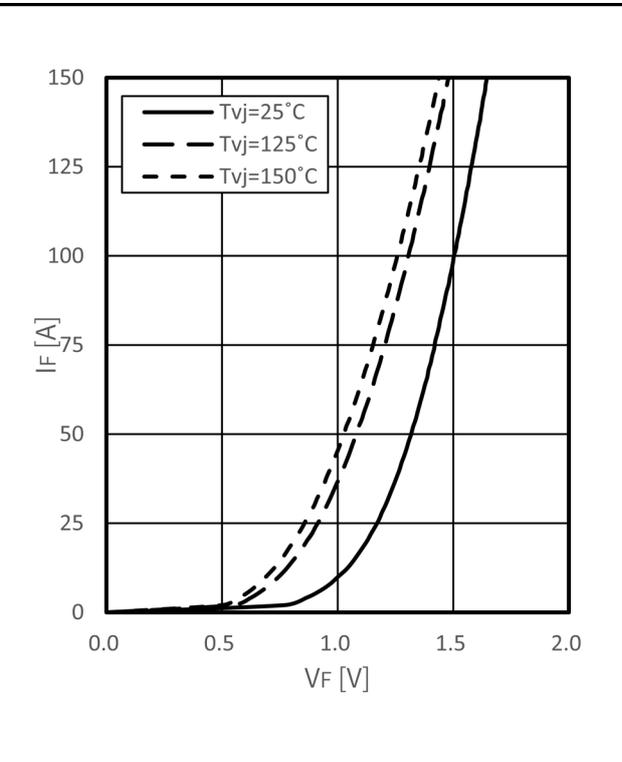


Forward characteristic of Diode, Inverter (typical)


$I_F = f(V_F)$

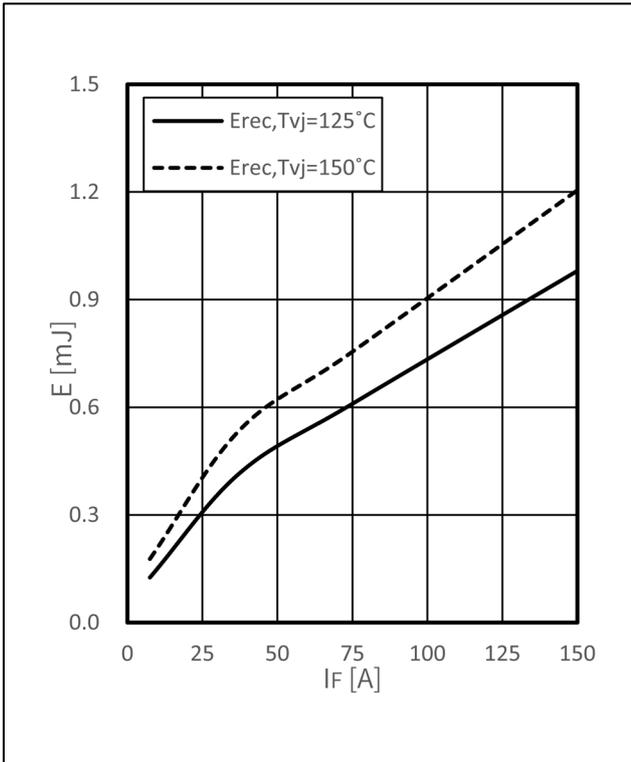


**Switching losses Diode, Inverter (typical)**  
 $E_{rec} = f(I_F)$   
 $R_G = 8.2 \Omega, V_{CE} = 300 V$

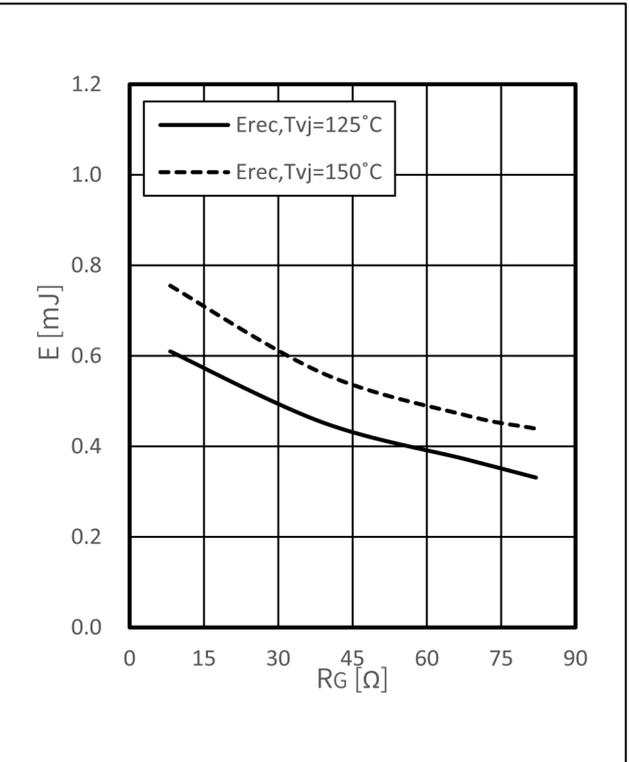


**Switching losses Diode, Inverter (typical)**  
 $E_{rec} = f(R_G)$   
 $I_F = 75 A, V_{CE} = 300 V$

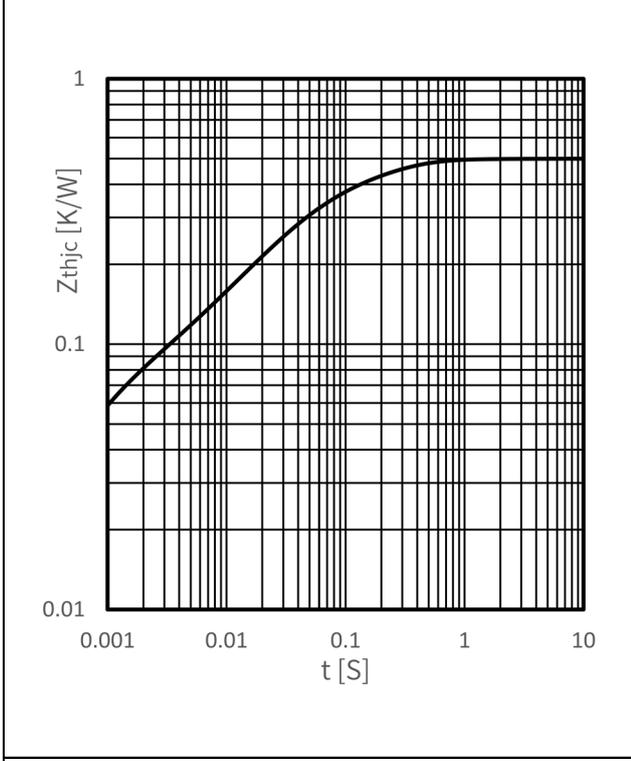


**Transient thermal impedance Diode, Inverter**  
 $Z_{thJC} = f(t)$

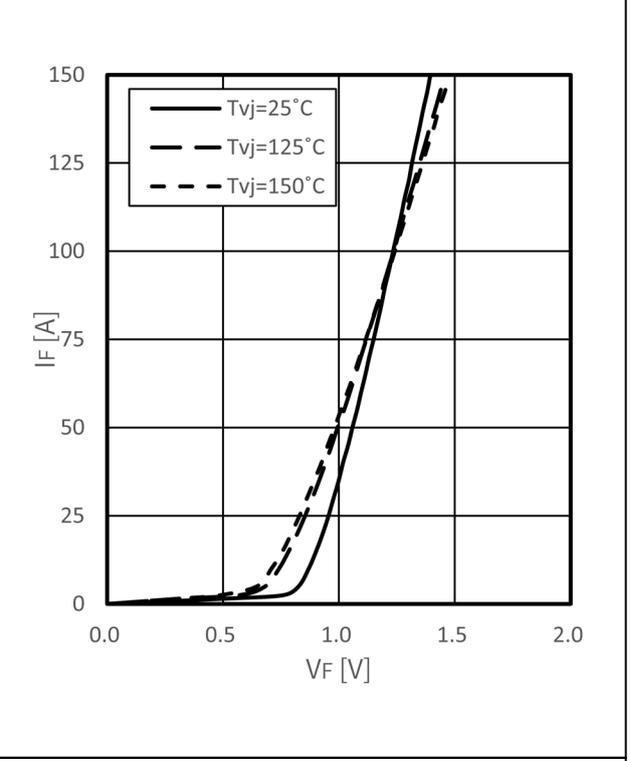


**Forward characteristic of Diode, Rectifier (typical)**  
 $I_F = f(V_F)$

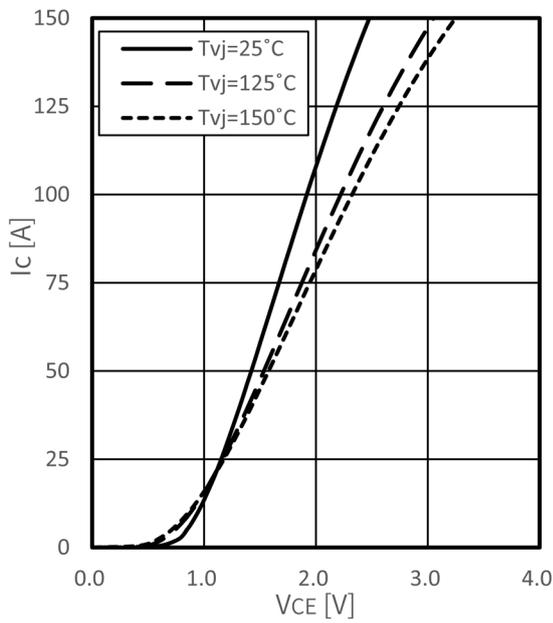

**Output characteristic IGBT, Brake-Chopper (typical)**  
 $I_C = f(V_{CE})$   
 $V_{GE} = 15\text{V}$

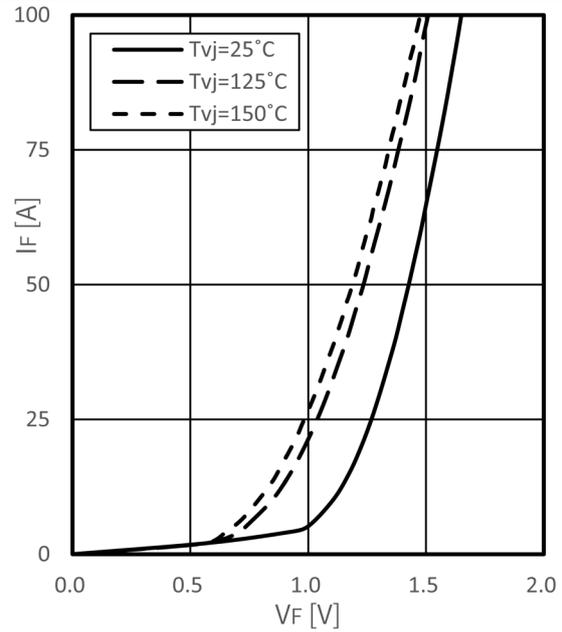

**Forward characteristic of Diode, Brake-Chopper (typical)**  
 $I_F = f(V_F)$

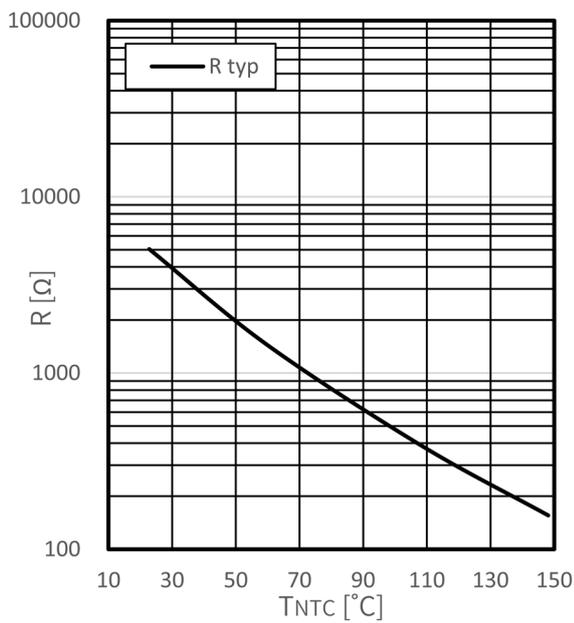

**NTC-Thermistor-temperature characteristic (typical)**  
 $R = f(T_{NTC})$

### 12. Circuit Diagram

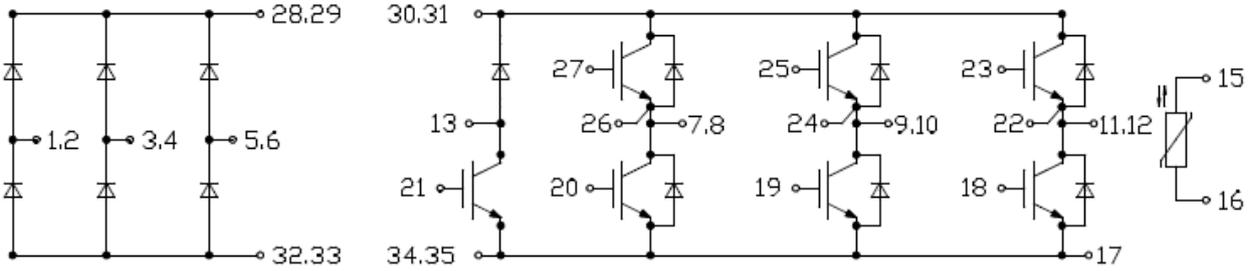


Figure 3

### 13. Package Outlines

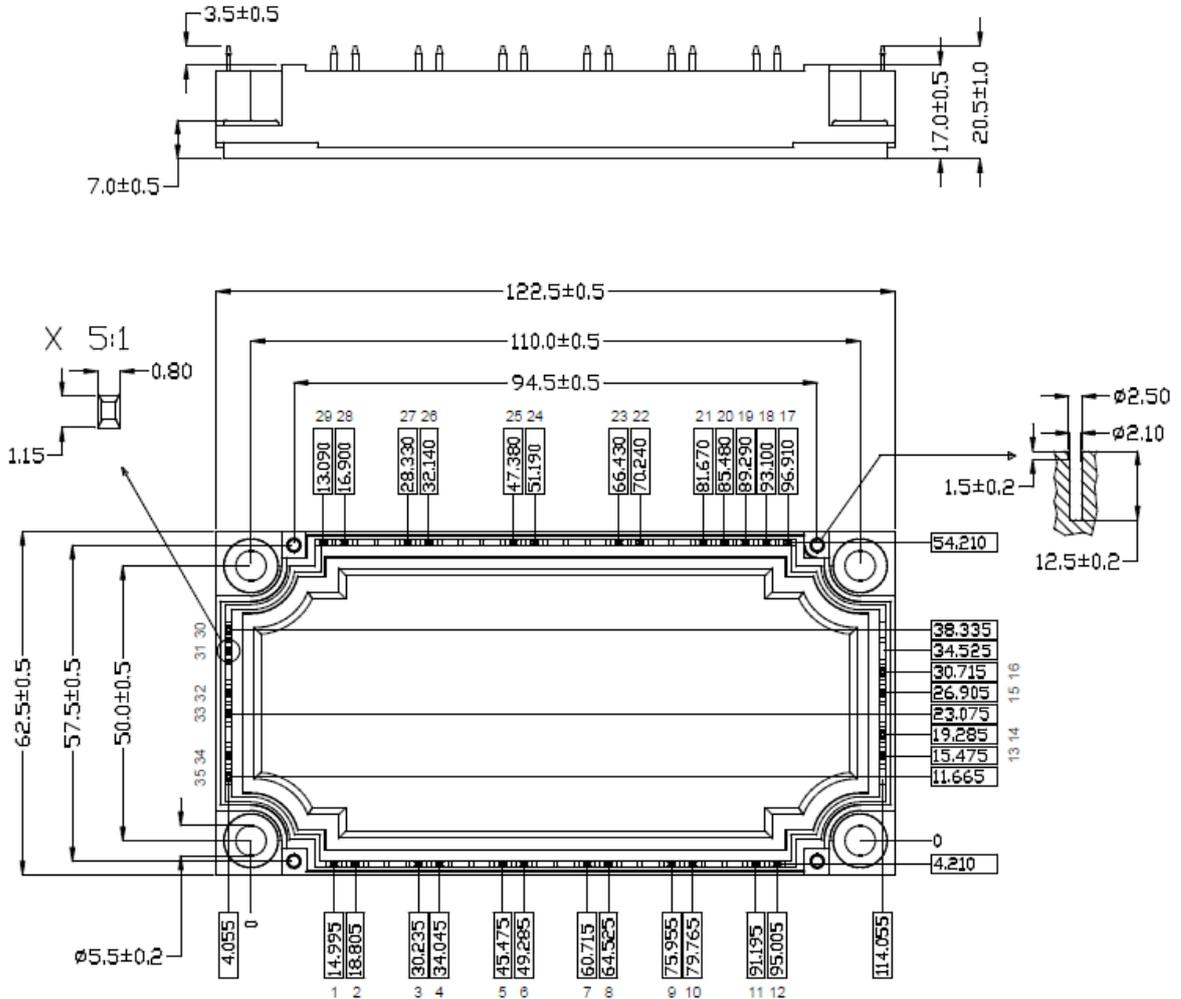


Figure 4