

1. Product Features

1.1 Electrical features

- $V_{CES}=650V$
- $I_{C\ nom}=75A / I_{CRM}=150A$
- Low switching losses
- Low inductance
- Fast switching and short tail current
- Integrated NTC temperature sensor
- High power and thermal cycling capability



Figure 1 IGBT Module

1.2 Mechanical features

- Al_2O_3 substrate with low thermal resistance
- Copper base plate

2. Typical Applications

- Switching mode power supply
- Drive inverters with brake system
- Uninterruptible power supply
- AC and DC servo drive amplifier

3. Description

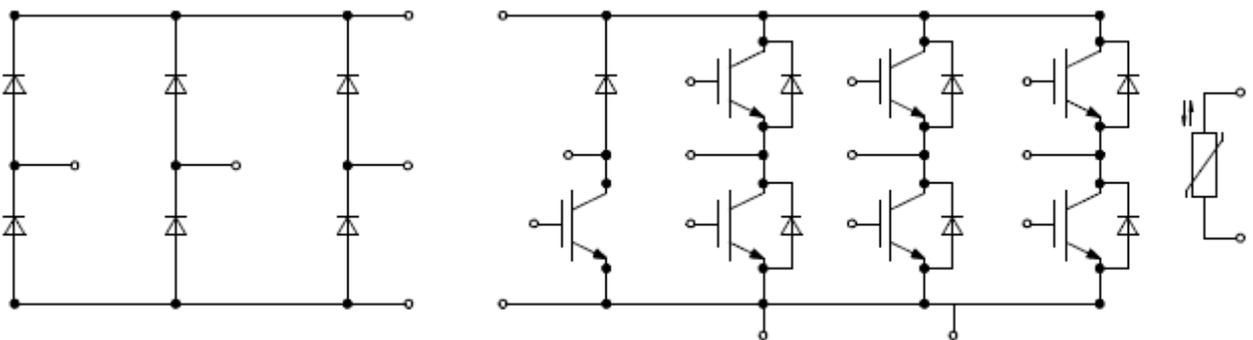


Figure 2 3 Phase Bridge +Rectifier+Brake

4. IGBT, Inverter

4.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Collector-emitter voltage 集电极—发射极间电压	$T_{vj} = 25^{\circ}\text{C}$	V_{CES}	650	V
Continuous DC collector current 连续集电极电流	$T_C = 55^{\circ}\text{C}, T_{vj\ max} = 150^{\circ}\text{C}$	$I_{C\ nom}$	75	A
Repetitive peak collector current 集电极峰值电流	$t_P = 1\ ms$	I_{CRM}	150	A
Total power dissipation 总功率损耗	$T_C = 25^{\circ}\text{C}, T_{vj\ max} = 175^{\circ}\text{C}$	P_{tot}	230	W
Gate-emitter peak voltage 栅极—发射极峰值电压		V_{GES}	+/- 20	V

4.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage 集电极—发射极饱和电压	$I_C = 75\ A, V_{GE} = 15\ V$	$V_{CE, sat}$		$T_{vj} = 25^{\circ}\text{C}$	1.67	V
				$T_{vj} = 125^{\circ}\text{C}$	1.87	V
				$T_{vj} = 150^{\circ}\text{C}$	1.94	V
Gate threshold voltage 栅极阈值电压	$I_C = 1\ mA, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$	$V_{GE, th}$	5.0	6.0	6.5	V
Gate charge 栅极电荷	$V_{GE} = -15\ V \dots +15\ V$	Q_G		0.15		μC
Internal gate resistor 内部栅极电阻	$T_{vj} = 25^{\circ}\text{C}$	R_{Gint}		2.20		Ω
Input capacitance 输入电容	$f = 1\ \text{MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25\ \text{V}, V_{GE} = 0\ \text{V}$	C_{ies}		3.93		nF
Reverse transfer capacitance 反向传输电容	$f = 1\ \text{MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25\ \text{V}, V_{GE} = 0\ \text{V}$	C_{res}		0.04		nF
Collector-emitter cut-off current 集电极-发射极截止电流	$V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}, T_{vj} = 25^{\circ}\text{C}$	I_{CES}			1	mA
Gate-emitter leakage current 栅极-发射极漏电流	$V_{CE} = 0\ \text{V}, V_{GE} = 20\ \text{V}, T_{vj} = 25^{\circ}\text{C}$	I_{GES}			100	nA
Turn-on delay time, inductive load 开通延迟时间	$I_C = 75\ A, V_{CE} = 300\ \text{V}$ $V_{GE} = +15/-15\ \text{V}$ $R_{G, on} = 8.2\ \Omega$	$t_{d, on}$		$T_{vj} = 25^{\circ}\text{C}$	0.03	μs
				$T_{vj} = 125^{\circ}\text{C}$	0.03	μs
				$T_{vj} = 150^{\circ}\text{C}$	0.03	μs
Rise time, inductive load 上升时间	$I_C = 75\ A, V_{CE} = 300\ \text{V}$ $V_{GE} = +15/-15\ \text{V}$ $R_{G, on} = 8.2\ \Omega$	t_r		$T_{vj} = 25^{\circ}\text{C}$	0.03	μs
				$T_{vj} = 125^{\circ}\text{C}$	0.03	μs
				$T_{vj} = 150^{\circ}\text{C}$	0.03	μs

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Turn-off delay time, inductive load 关断延迟时间	I _C = 75A, V _{CE} = 300V V _{GE} = +15/-15V R _{G,off} = 8.2Ω	T _{vj} = 25°C		0.10		us
		T _{vj} = 125°C		0.10		us
		T _{vj} = 150°C		0.10		us
Fall time, inductive load 下降时间	I _C = 75A, V _{CE} = 300V V _{GE} = +15/-15V R _{G,off} = 8.2Ω	T _{vj} = 25°C		0.08		us
		T _{vj} = 125°C		0.14		us
		T _{vj} = 150°C		0.15		us
Turn-on energy loss per pulse 开通损耗能量	I _C = 75A, V _{CE} = 300V, L _S =30nH V _{GE} = +15/-15V, di/dt = 1870A/μs R _{G,on} = 8.2Ω (T _{vj} = 150°C)	T _{vj} = 25°C		1.67		mJ
		T _{vj} = 125°C		3.16		mJ
		T _{vj} = 150°C		3.61		mJ
Turn-off energy loss per pulse 关断损耗能量	I _C = 75A, V _{CE} = 300V, L _S =30nH V _{GE} = +15/-15V, dv/dt = 7160V/μs R _{G,off} = 8.2Ω (T _{vj} = 150°C)	T _{vj} = 25°C		1.02		mJ
		T _{vj} = 125°C		1.58		mJ
		T _{vj} = 150°C		1.66		mJ
SC data 短路数据	V _{GE} ≤ 15V, V _{CC} = 300V, t _p ≤ 8 μs, T _{vj} = 150°C, C _{GE} = 0.0μF, V _{CEmax} = V _{CES} - L _{SCE} · di/dt	I _{sc}		310		A
Thermal resistance, junction to case 结-外壳热阻	Per IGBT	R _{th,jc}			0.65	K/W

5. Diode, Inverter

5.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	T _{vj} = 25°C	V _{RRM}	650	V
Continuous DC forward current 连续正向直流电流		I _F	75	A
Repetitive peak forward current 正向重复峰值电流	t _p = 1 ms	I _{FRM}	150	A

5.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	I _F = 75 A, V _{GE} = 0 V	T _{vj} = 25°C		1.42		V
		T _{vj} = 125°C		1.20		V
		T _{vj} = 150°C		1.15		V

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit	
			Min.	Typ.	Max.		
Peak reverse recovery current 反向恢复峰值电流	$I_F = 75A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 2180 A/\mu s$ ($T_{vj} = 150^\circ C$)	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$	I_{RM}		75.6 113 118	A A A	
Recovered charge 恢复电荷	$I_F = 75A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 2180 A/\mu s$ ($T_{vj} = 150^\circ C$)	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$		Q_r		2.89 7.76 9.28	μC μC μC
Reverse recovery energy 反向恢复损耗 (每脉冲)	$I_F = 75A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 2180 A/\mu s$ ($T_{vj} = 150^\circ C$)	$T_{vj} = 25^\circ C$ $T_{vj} = 125^\circ C$ $T_{vj} = 150^\circ C$			E_{rec}		0.15 0.61 0.75
Thermal resistance, junction to case 结-外壳热阻	Per diode		$R_{th,Jc}$				

6. Diode, Rectifier

6.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	$T_{vj} = 25^\circ C$	V_{RRM}	1600	V
Average Rectified Output current 整流器输出均方根电流	$V_F = 1.2, T_{vj} = 150^\circ C$	I_F	75	A
Surge forward current 正向浪涌电流	$t_p = 10 ms, T_{vj} = 150^\circ C$	I_{FSM}	515	A
I^2t - value I^2t -值	$t_p = 10 ms, T_{vj} = 150^\circ C$	I^2t	1330	A ² s

6.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	$T_{vj} = 150^\circ C, I_F = 75 A$	V_F		1.10		V
Reverse current 反向电流	$T_{vj} = 150^\circ C, V_R = 1600 V$	I_R		1.00		mA
Thermal resistance, junction to case 结-外壳热阻	Per diode	$R_{th,Jc}$			0.43	K/W

7. IGBT, Brake-Chopper

7.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Collector-emitter voltage 集电极—发射极间电压	$T_{vj} = 25^{\circ}\text{C}$	V_{CES}	650	V
Continuous DC collector current 连续集电极电流	$T_C = 55^{\circ}\text{C}, T_{vj\ max} = 150^{\circ}\text{C}$	$I_{C\ nom}$	75	A
Repetitive peak collector current 集电极峰值电流	$t_P = 1\ \text{ms}$	I_{CRM}	150	A
Total power dissipation 总功率损耗	$T_C = 25^{\circ}\text{C}, T_{vj\ max} = 175^{\circ}\text{C}$	P_{tot}	230	W
Gate-emitter peak voltage 栅极—发射极峰值电压		V_{GES}	+/- 20	V

7.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage 集电极—发射极饱和电压	$I_C = 75\ \text{A}, V_{GE} = 15\ \text{V}$	$V_{CE,sat}$		$T_{vj} = 25^{\circ}\text{C}$	1.67	V
				$T_{vj} = 125^{\circ}\text{C}$	1.87	V
				$T_{vj} = 150^{\circ}\text{C}$	1.94	V
Gate threshold voltage 栅极阈值电压	$I_C = 1\ \text{mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$	$V_{GE,th}$	5.0	6.0	6.5	V
Gate charge 栅极电荷	$V_{GE} = -15\ \text{V} \dots +15\ \text{V}$	Q_G		0.15		μC
Internal gate resistor 内部栅极电阻	$T_{vj} = 25^{\circ}\text{C}$	R_{Gint}		2.20		Ω
Input capacitance 输入电容	$f=1\ \text{MHz}, T_{vj}=25^{\circ}\text{C}, V_{CE}=25\ \text{V}, V_{GE}=0\ \text{V}$	C_{ies}		3.93		nF
Reverse transfer capacitance 反向传输电容	$f=1\ \text{MHz}, T_{vj}=25^{\circ}\text{C}, V_{CE}=25\ \text{V}, V_{GE}=0\ \text{V}$	C_{res}		0.04		nF
Collector-emitter cut-off current 集电极-发射极截止电流	$V_{CE} = 650\ \text{V}, V_{GE} = 0\ \text{V}, T_{vj} = 25^{\circ}\text{C}$	I_{CES}			1	mA
Gate-emitter leakage current 栅极-发射极漏电流	$V_{CE} = 0\ \text{V}, V_{GE} = 20\ \text{V}, T_{vj} = 25^{\circ}\text{C}$	I_{GES}			100	nA
Turn-on delay time, inductive load 开通延迟时间	$I_C = 75\ \text{A}, V_{CE} = 300\ \text{V}$ $V_{GE} = +15/-15\ \text{V}$ $R_{G,on} = 8.2\ \Omega$	$t_{d,on}$		$T_{vj} = 25^{\circ}\text{C}$	0.03	μs
				$T_{vj} = 125^{\circ}\text{C}$	0.03	μs
				$T_{vj} = 150^{\circ}\text{C}$	0.03	μs
Rise time, inductive load 上升时间	$I_C = 75\ \text{A}, V_{CE} = 300\ \text{V}$ $V_{GE} = +15/-15\ \text{V}$ $R_{G,on} = 8.2\ \Omega$	t_r		$T_{vj} = 25^{\circ}\text{C}$	0.03	μs
				$T_{vj} = 125^{\circ}\text{C}$	0.04	μs
				$T_{vj} = 150^{\circ}\text{C}$	0.04	μs

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Turn-off delay time, inductive load 关断延迟时间	I _C = 75A, V _{CE} = 300V V _{GE} = +15/-15V R _{G,off} = 8.2Ω	T _{vj} = 25°C		0.08		us
		T _{vj} = 125°C		0.10		us
		T _{vj} = 150°C		0.10		us
Fall time, inductive load 下降时间	I _C = 75A, V _{CE} = 300V V _{GE} = +15/-15V R _{G,off} = 8.2Ω	T _{vj} = 25°C		0.06		us
		T _{vj} = 125°C		0.15		us
		T _{vj} = 150°C		0.15		us
Turn-on energy loss per pulse 开通损耗能量	I _C = 75A, V _{CE} = 300V, L _S = 30nH V _{GE} = +15/-15V, di/dt = 1660A/μs R _{G,on} = 8.2Ω (T _{vj} = 150°C)	T _{vj} = 25°C		2.55		mJ
		T _{vj} = 125°C		4.14		mJ
		T _{vj} = 150°C		4.57		mJ
Turn-off energy loss per pulse 关断损耗能量	I _C = 75A, V _{CE} = 300V, L _S = 30nH V _{GE} = +15/-15V, dv/dt = 7380V/μs R _{G,off} = 8.2Ω (T _{vj} = 150°C)	T _{vj} = 25°C		1.00		mJ
		T _{vj} = 125°C		1.54		mJ
		T _{vj} = 150°C		1.65		mJ
SC data 短路数据	V _{GE} ≤ 15V, V _{CC} = 300V, t _p ≤ 8 μs, T _{vj} = 150°C, C _{GE} = 0.0μF, V _{CEmax} = V _{CEs} - L _{SCE} · di/dt	I _{sc}		280		A
Thermal resistance, junction to case 结-外壳热阻	Per IGBT	R _{th,jc}			0.65	K/W

8. Diode, Brake-Chopper

8.1 Maximum rated values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	T _{vj} = 25°C	V _{RRM}	650	V
Continuous DC forward current 连续正向直流电流		I _F	50	A
Repetitive peak forward current 正向重复峰值电流	t _p = 1 ms	I _{FRM}	100	A

8.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Forward voltage 正向电压	I _F = 50 A, V _{GE} = 0 V	T _{vj} = 25°C		1.43		V
		T _{vj} = 125°C		1.23		V
		T _{vj} = 150°C		1.19		V

(table continues...) 待续

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Peak reverse recovery current 反向恢复峰值电流	$I_F = 50A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 980 A/\mu s$ $(T_{vj}=150^\circ C)$	I_{RM}		$T_{vj} = 25^\circ C$	71	A
				$T_{vj} = 125^\circ C$	62.4	A
				$T_{vj} = 150^\circ C$	64.8	A
Recovered charge 恢复电荷	$I_F = 50A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 980 A/\mu s$ $(T_{vj}=150^\circ C)$	Q_r		$T_{vj} = 25^\circ C$	3.3	μC
				$T_{vj} = 125^\circ C$	5.27	μC
				$T_{vj} = 150^\circ C$	6.24	μC
Reverse recovery energy 反向恢复损耗 (每脉冲)	$I_F = 50A, V_R = 300V$ $V_{GE} = -15V, -di_F/dt = 980 A/\mu s$ $(T_{vj}=150^\circ C)$	E_{rec}		$T_{vj} = 25^\circ C$	0.9	mJ
				$T_{vj} = 125^\circ C$	0.36	mJ
				$T_{vj} = 150^\circ C$	0.47	mJ
Thermal resistance, junction to case 结-外壳热阻	Per diode	$R_{th,Jc}$			0.92	K/W

9. NTC-Thermistor

9.1 Characteristic value


Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Rated resistance 额定电阻值	$T_c = 25^\circ C$	R_{25}		5.00		K Ω
Power dissipation 耗散功耗	$T_c = 25^\circ C$	P_{25}			20	mW
B-value B-Z 值	$R_2=R_{25}\exp[B_{25/50}(1/T_2-1/(298, 15K))]$	B_{25}/B_{50}		3400		K
B-value B-Z 值	$R_2=R_{25}\exp[B_{25/75}(1/T_2-1/(298, 15K))]$	B_{25}/B_{75}		3430		K
B-value B-Z 值	$R_2=R_{25}\exp[B_{25/100}(1/T_2-1/(298, 15K))]$	B_{25}/B_{100}		3445		K



10. Module

10.1 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Isolation Voltage 隔离电压	RMS, f=50HZ,1min	V _{ISOL}			2500	V
Stray inductance module 杂散电感		L _{sCE}		40		nH
Operation Junction Temperature 结温		T _{jop}	-40		150	°C
Storage Temperature Range 存储温度范围		T _{stg}	-40		125	°C
Mounting Torque 安装扭矩	Screw M5	M	3		6	N.m
Weight of Module 重量		G		300		g



11. Characteristics diagrams

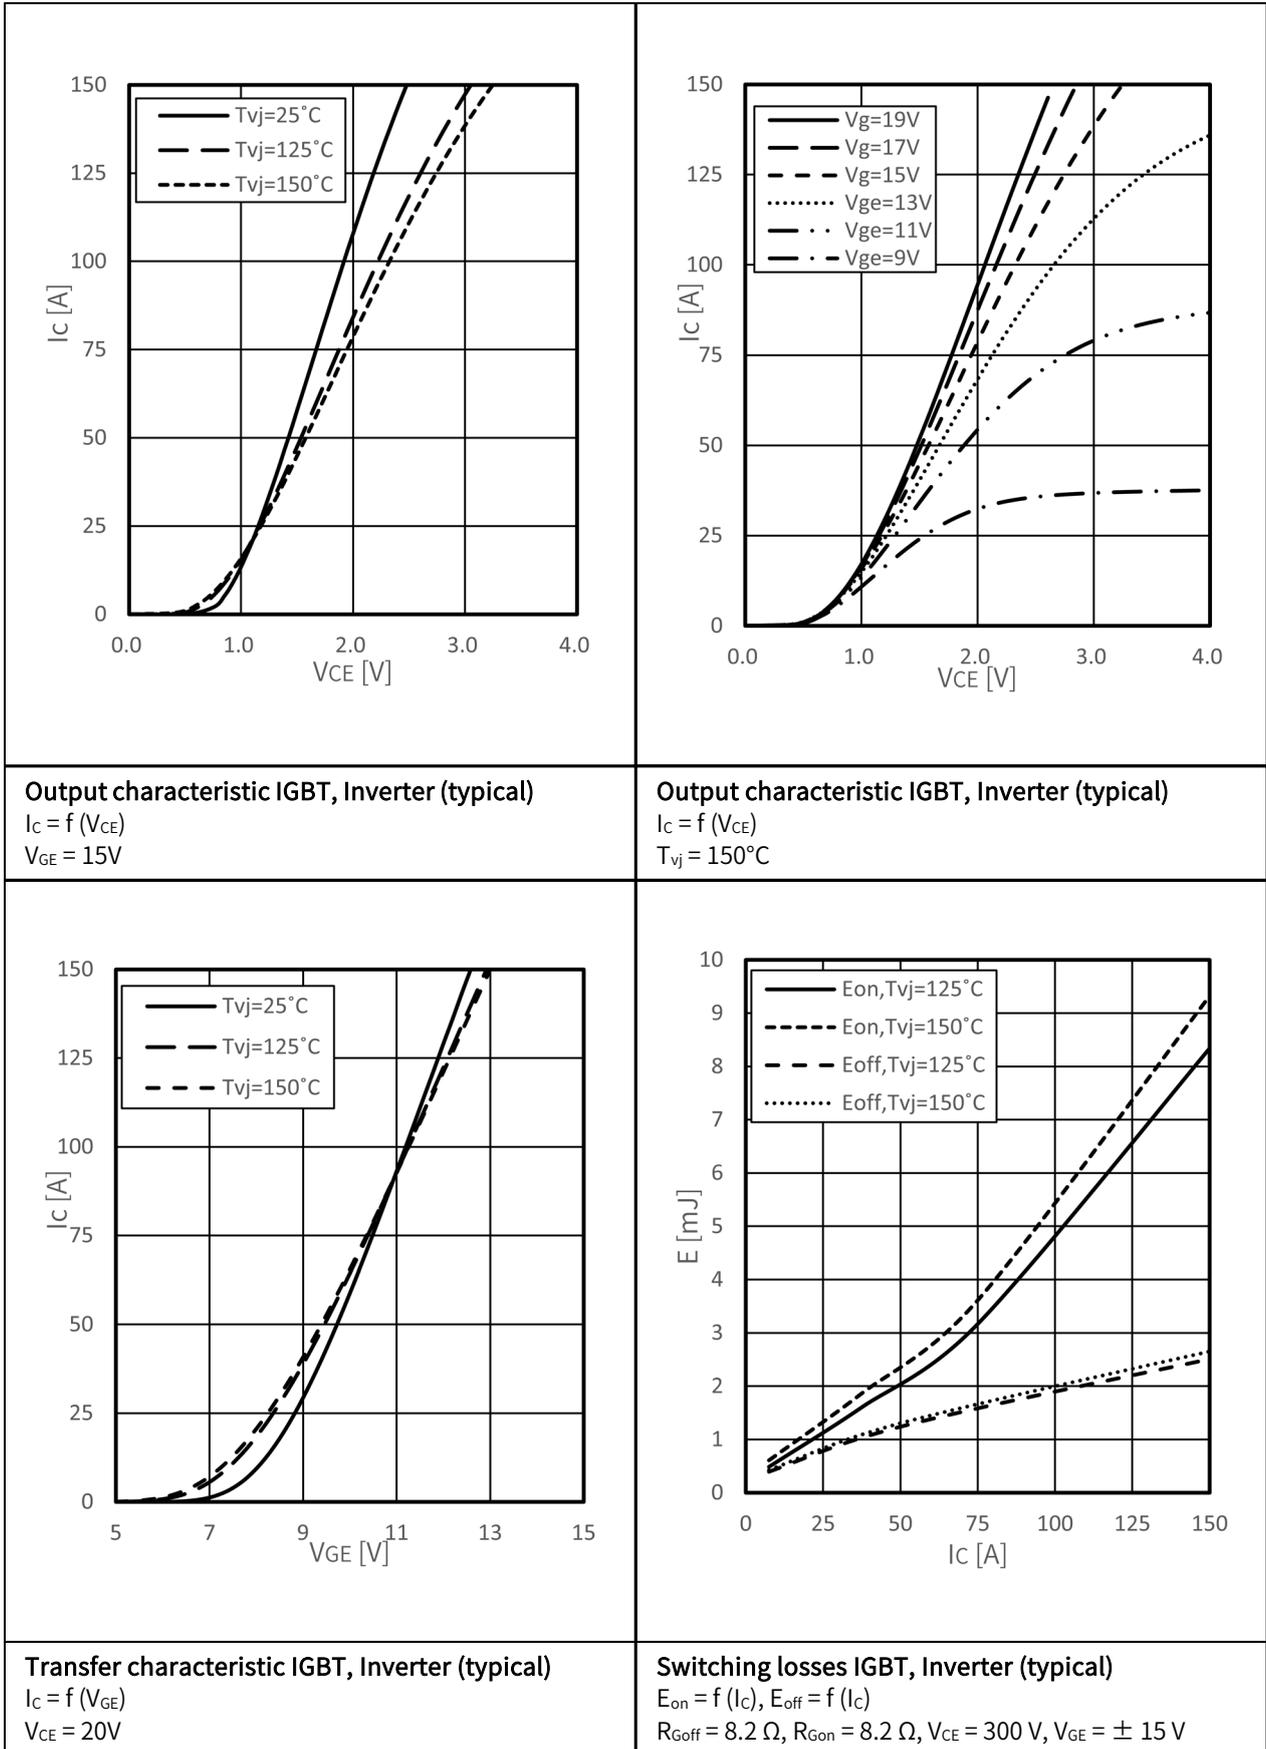

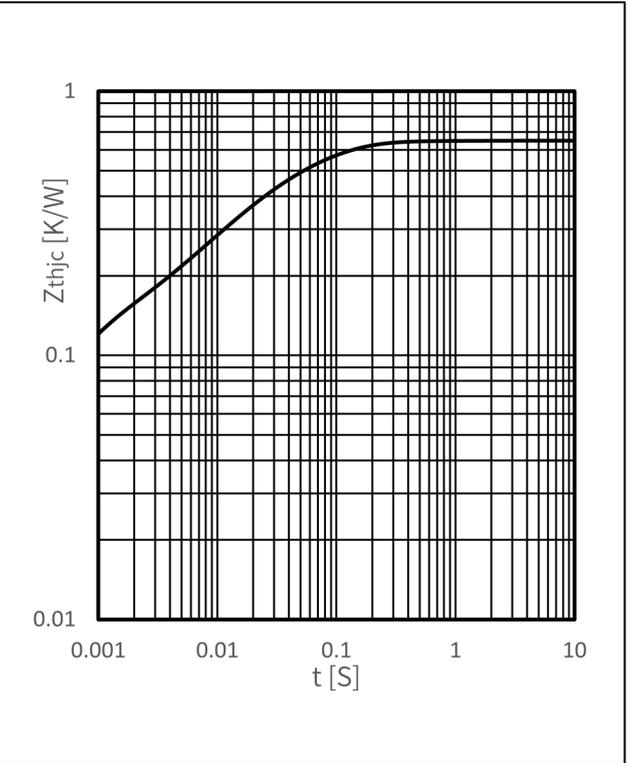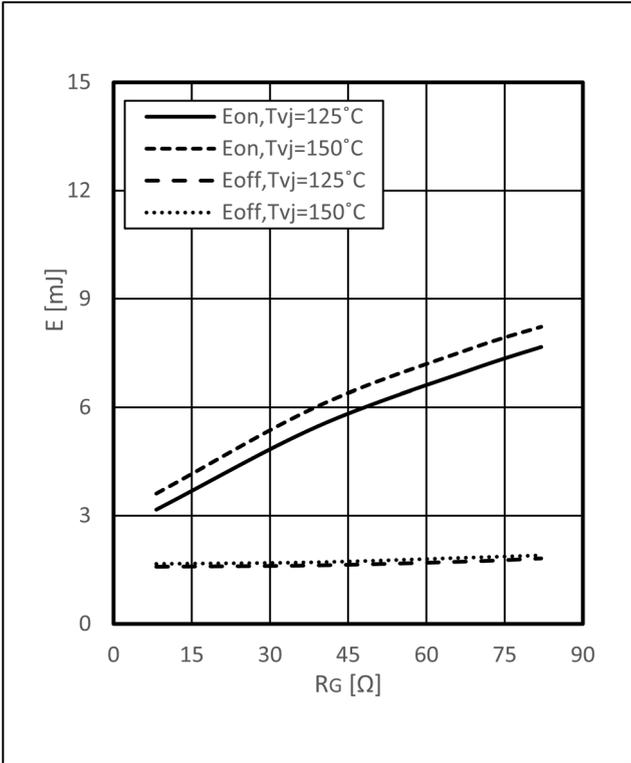


Switching losses IGBT, Inverter (typical)
 $E_{on} = f(R_G)$, $E_{off} = f(R_G)$
 $I_C = 75\text{ A}$, $V_{CE} = 300\text{ V}$, $V_{GE} = \pm 15\text{ V}$

Transient thermal impedance IGBT, Inverter
 $Z_{thJC} = f(t)$

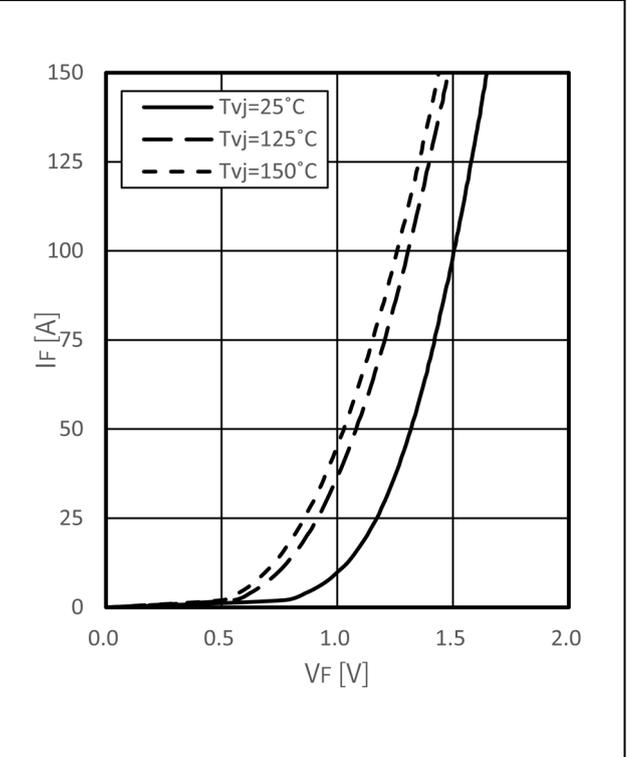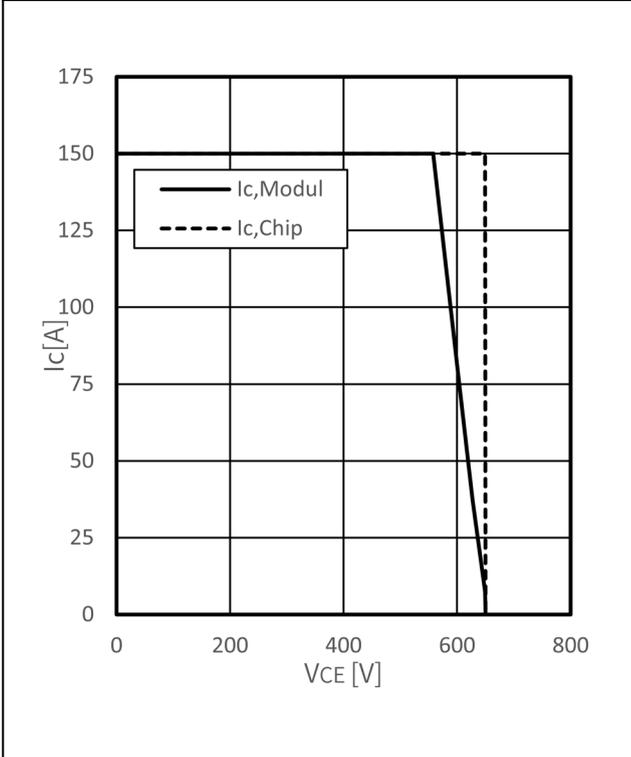


Reverse bias safe operating area IGBT, Inverter (RBSOA)
 $I_C = f(V_{CE})$
 $V_{GE} = 15\text{ V}$, $R_{Goff} = 8.2\ \Omega$, $T_{vj} = 150\text{ }^\circ\text{C}$


Forward characteristic of Diode, Inverter (typical)
 $I_F = f(V_F)$

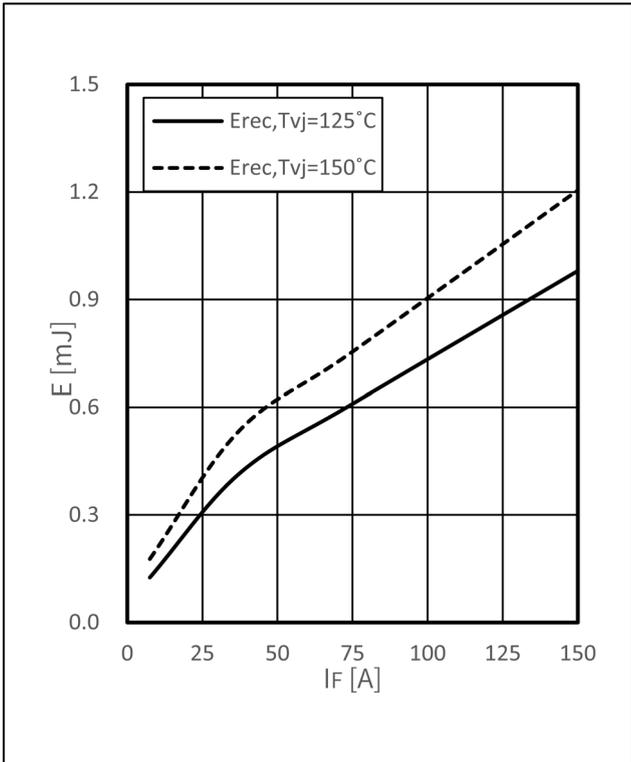


Switching losses Diode, Inverter (typical)
 $E_{rec} = f(I_F)$
 $R_G = 8.2 \Omega, V_{CE} = 300 V$

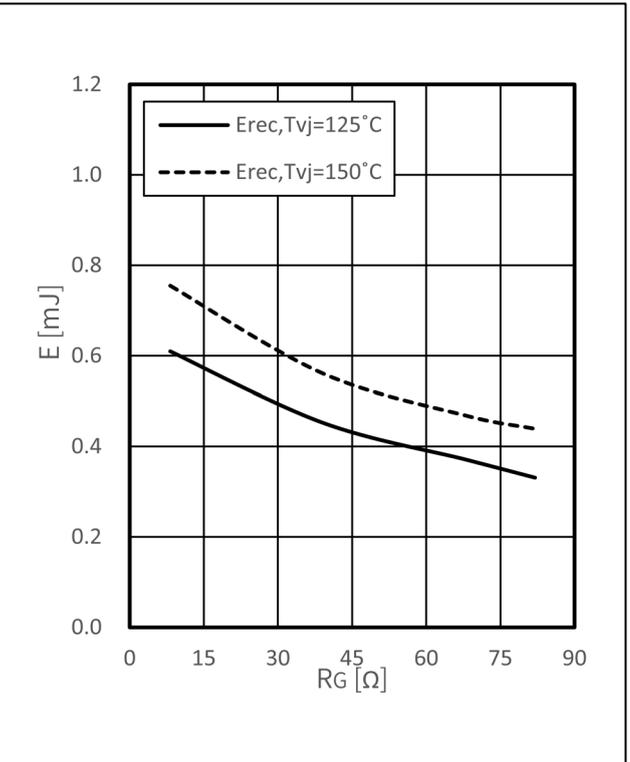



Switching losses Diode, Inverter (typical)
 $E_{rec} = f(R_G)$
 $I_F = 75 A, V_{CE} = 300 V$

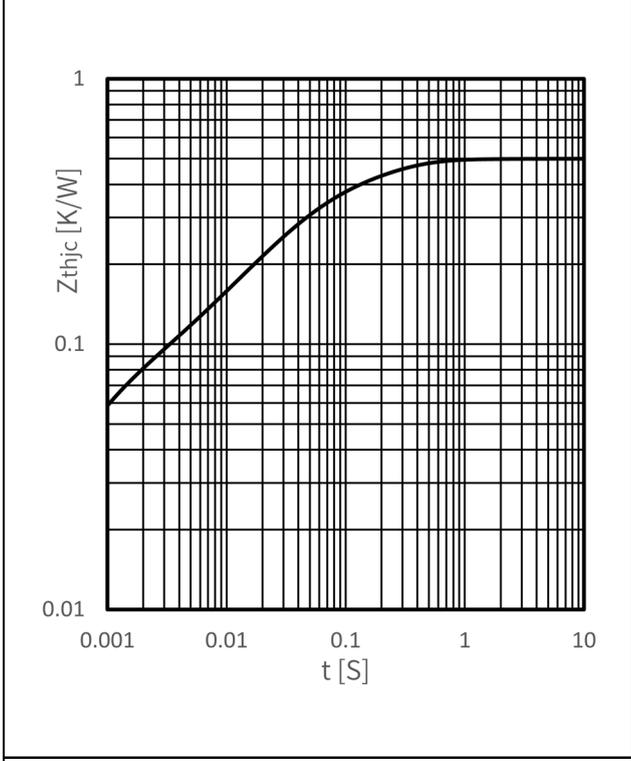

Transient thermal impedance Diode, Inverter
 $Z_{thjc} = f(t)$

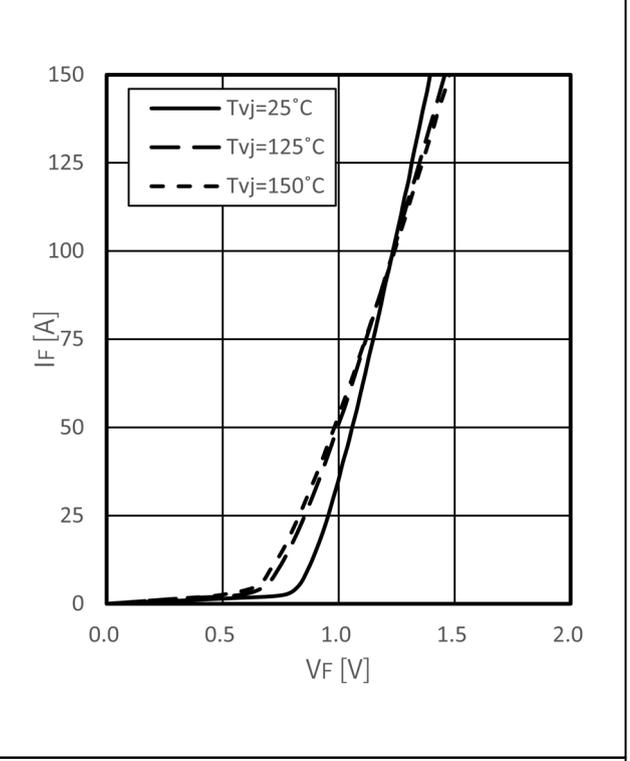


Forward characteristic of Diode, Rectifier (typical)
 $I_F = f(V_F)$

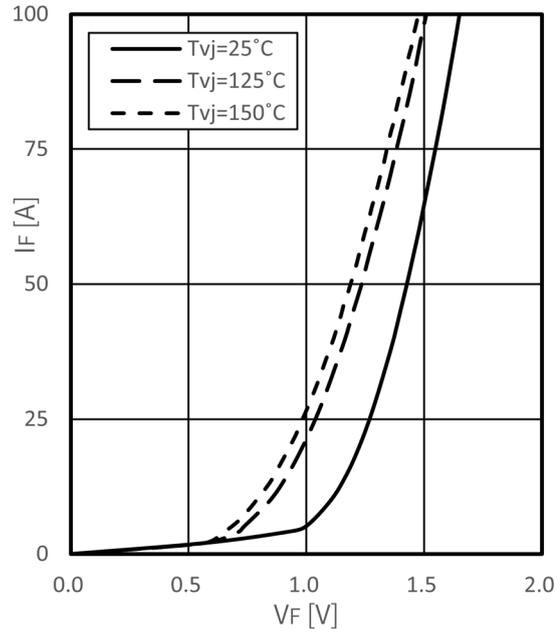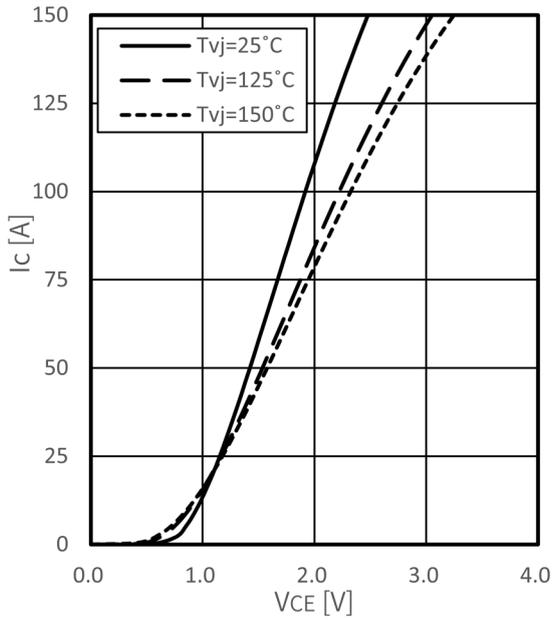

Output characteristic IGBT, Brake-Chopper (typical)
 $I_C = f(V_{CE})$
 $V_{GE} = 15V$

Forward characteristic of Diode, Brake-Chopper (typical)
 $I_F = f(V_F)$

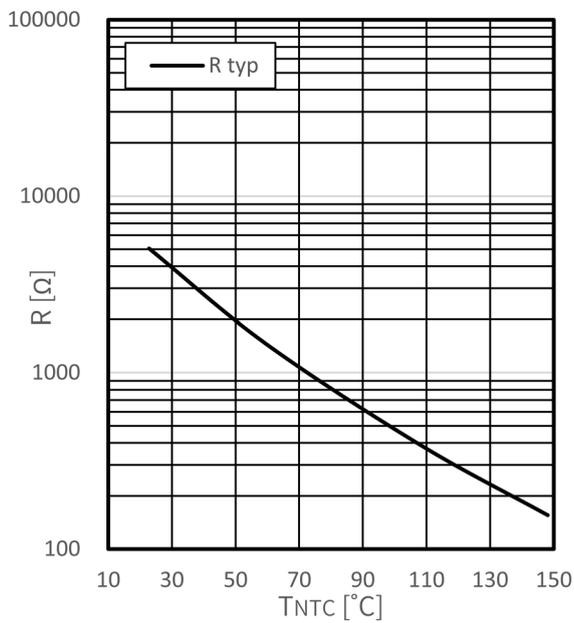

NTC-Thermistor-temperature characteristic (typical)
 $R = f(T_{NTC})$

12. Circuit Diagram

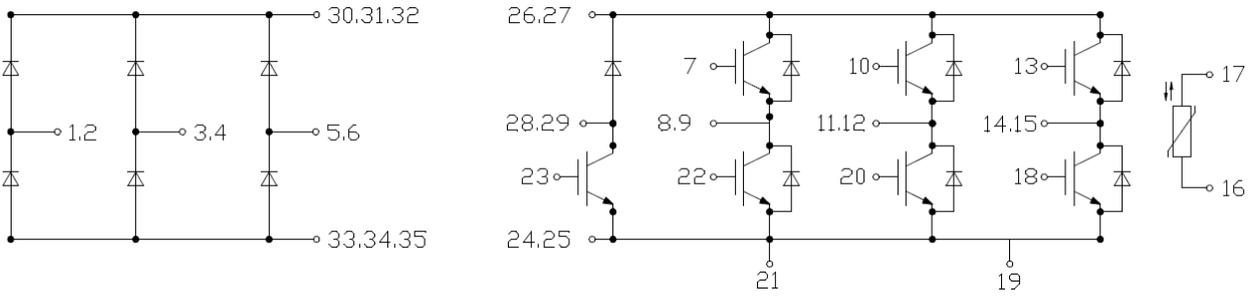


Figure 3

13. Package Outlines

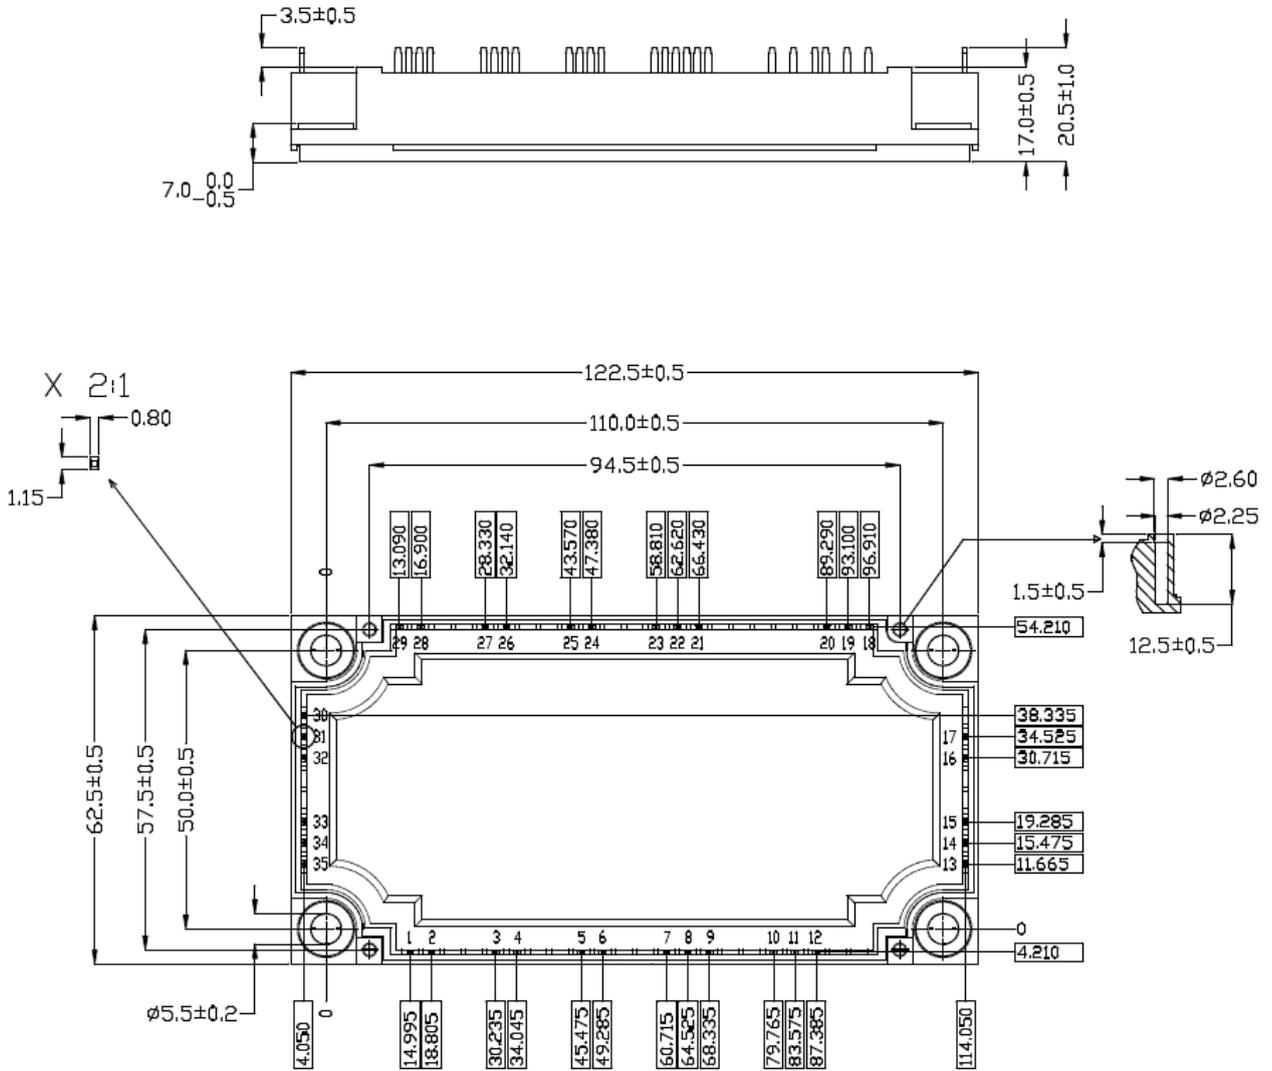


Figure 4