

## 1. Product Features

### 1.1 Electrical features

- $V_{CES}=1200V$
- $I_{C\ nom}=200A / I_{CRM}=400A$
- Low switching losses
- Low inductance
- Fast switching and short tail current
- Integrated NTC temperature sensor
- High power and thermal cycling capability



Figure1 IGBT Module

### 1.2 Mechanical features

- $Al_2O_3$  substrate with low thermal resistance
- Copper base plate

## 2. Typical Applications

- Switching mode power supply
- Drive inverters with brake system
- Uninterruptible power supply
- AC and DC servo drive amplifier

## 3. Description

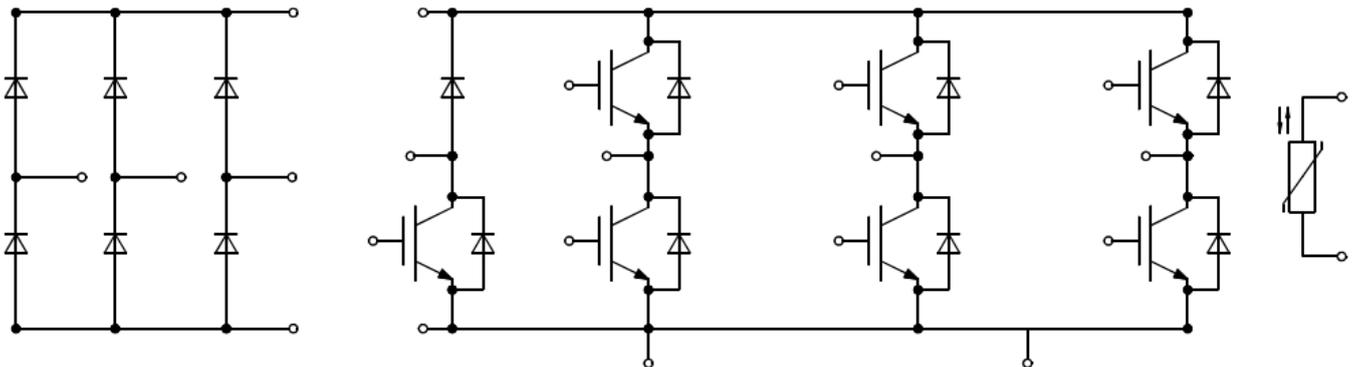


Figure 2 3 Phase Bridge +Rectifier+Brake

## 4. IGBT, Inverter

### 4.1 Maximum Rated Values

| Parameter                                    | Note or test condition  | Symbol              | Values | Unit |
|--|---|---------------------|--------|------|
| Collector-emitter voltage<br>集电极—发射极间电压      | $T_{vj} = 25^{\circ}\text{C}$   | $V_{CES}$           | 1200   | V    |
| Continuous DC collector current<br>连续集电极电流   | $T_C = 100^{\circ}\text{C}, T_{vj} \text{ max} = 150^{\circ}\text{C}$ | $I_{C \text{ nom}}$ | 200    | A    |
| Repetitive peak collector current<br>集电极峰值电流 | $t_P = 1 \text{ ms}$  | $I_{CRM}$           | 400    | A    |
| Total power dissipation<br>总功率损耗             | $T_C = 25^{\circ}\text{C}, T_{vj} \text{ max} = 175^{\circ}\text{C}$  | $P_{\text{tot}}$    | 731    | W    |
| Gate-emitter peak voltage<br>栅极—发射极峰值电压      |   | $V_{GES}$           | +/- 20 | V    |

### 4.2 Characteristic value

| Parameter   | Note or test condition   | Symbol               | Values |                                |      | Unit          |    |
|---|--|----------------------|--------|--------------------------------|------|---------------|----|
|   |  |                      | Min.   | Typ.                           | Max. |               |    |
| Collector-emitter saturation voltage<br>集电极—发射极饱和电压 | $I_C = 200 \text{ A}, V_{GE} = 15 \text{ V}$   | $V_{CE, \text{sat}}$ |        | $T_{vj} = 25^{\circ}\text{C}$  | 1.59 |               | V  |
|   |  |                      |        | $T_{vj} = 125^{\circ}\text{C}$ | 1.86 |               | V  |
|   |  |                      |        | $T_{vj} = 150^{\circ}\text{C}$ | 1.93 |               | V  |
| Gate threshold voltage<br>栅极阈值电压                    | $I_C = 6 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$   | $V_{GE, \text{th}}$  | 5.0    | 5.8                            | 6.5  | V             |    |
| Gate charge<br>栅极电荷                                 | $V_{GE} = -15 \text{ V} \dots +15 \text{ V}$   | $Q_G$                |        | 1.90                           |      | $\mu\text{C}$ |    |
| Internal gate resistor<br>内部栅极电阻                    | $T_{vj} = 25^{\circ}\text{C}$  | $R_{G \text{ int}}$  |        | 1.70                           |      | $\Omega$      |    |
| Input capacitance<br>输入电容                           | $f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$                    | $C_{\text{ies}}$     |        | 33.4                           |      | nF            |    |
| Reverse transfer capacitance<br>反向传输电容              | $f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$                    | $C_{\text{res}}$     |        | 0.17                           |      | nF            |    |
| Collector-emitter cut-off current<br>集电极-发射极截止电流    | $V_{CE} = 1200 \text{ V}, V_{GE} = 0 \text{ V}, T_{vj} = 25^{\circ}\text{C}$                                     | $I_{CES}$            |        |                                | 1    | mA            |    |
| Gate-emitter leakage current<br>栅极-发射极漏电流           | $V_{CE} = 0 \text{ V}, V_{GE} = 20 \text{ V}, T_{vj} = 25^{\circ}\text{C}$                                       | $I_{GES}$            |        |                                | 100  | nA            |    |
| Turn-on delay time, inductive load<br>开通延迟时间        | $I_C = 200 \text{ A}, V_{CE} = 600 \text{ V}$<br>$V_{GE} = +15/-15 \text{ V}$<br>$R_{G, \text{on}} = 3.3 \Omega$ | $t_{d, \text{on}}$   |        | $T_{vj} = 25^{\circ}\text{C}$  | 0.14 |               | us |
|   |  |                      |        | $T_{vj} = 125^{\circ}\text{C}$ | 0.15 |               | us |
|   |  |                      |        | $T_{vj} = 150^{\circ}\text{C}$ | 0.15 |               | us |
| Rise time, inductive load<br>上升时间                   | $I_C = 200 \text{ A}, V_{CE} = 600 \text{ V}$<br>$V_{GE} = +15/-15 \text{ V}$<br>$R_{G, \text{on}} = 3.3 \Omega$ | $t_r$                |        | $T_{vj} = 25^{\circ}\text{C}$  | 0.06 |               | us |
|   |  |                      |        | $T_{vj} = 125^{\circ}\text{C}$ | 0.07 |               | us |
|   |  |                      |        | $T_{vj} = 150^{\circ}\text{C}$ | 0.07 |               | us |

(table continues...) 待续

| Parameter                                      | Note or test condition  | Symbol  | Values      |      |      | Unit      |
|--|---|---|-------------|------|------|-----------|
|  |   |   | Min.        | Typ. | Max. |           |
| Turn-off delay time, inductive load<br>关断延迟时间  | $I_C = 200A, V_{CE} = 600V$<br>$V_{GE} = +15/-15V$<br>$R_{G,off} = 3.3\Omega$   | $T_{vj} = 25^\circ C$<br>$T_{vj} = 125^\circ C$<br>$T_{vj} = 150^\circ C$ | $t_{d,off}$ |      | 0.30 | us        |
|  |   |   |             |      | 0.33 | us        |
|  |   |   |             |      | 0.35 | us        |
| Fall time, inductive load<br>下降时间              | $I_C = 200A, V_{CE} = 600V$<br>$V_{GE} = +15/-15V$<br>$R_{G,off} = 3.3\Omega$   | $T_{vj} = 25^\circ C$<br>$T_{vj} = 125^\circ C$<br>$T_{vj} = 150^\circ C$ | $t_f$       |      | 0.18 | us        |
|  |   |   |             |      | 0.30 | us        |
|  |   |   |             |      | 0.34 | us        |
| Turn-on energy loss per pulse<br>开通损耗能量        | $I_C = 200A, V_{CE} = 600V, L_S = 30nH$<br>$V_{GE} = +15/-15V, di/dt = 2250A/\mu s$<br>$R_{G,on} = 3.3\Omega (T_{vj} = 150^\circ C)$        | $T_{vj} = 25^\circ C$<br>$T_{vj} = 125^\circ C$<br>$T_{vj} = 150^\circ C$ | $E_{on}$    |      | 9.18 | mJ        |
|  |   |   |             |      | 13.8 | mJ        |
|  |   |   |             |      | 15.5 | mJ        |
| Turn-off energy loss per pulse<br>关断损耗能量       | $I_C = 200A, V_{CE} = 600V, L_S = 30nH$<br>$V_{GE} = +15/-15V, dv/dt = 5280V/\mu s$<br>$R_{G,off} = 3.3\Omega (T_{vj} = 150^\circ C)$       | $T_{vj} = 25^\circ C$<br>$T_{vj} = 125^\circ C$<br>$T_{vj} = 150^\circ C$ | $E_{off}$   |      | 13.4 | mJ        |
|  |   |   |             |      | 19.1 | mJ        |
|  |   |   |             |      | 21.3 | mJ        |
| SC data<br>短路数据                                | $V_{GE} \leq 15V, V_{CC} = 600V, t_p \leq 8 \mu s, T_{vj} = 150^\circ C,$<br>$C_{GE} = 0.0\mu F, V_{CEmax} = V_{CES} - L_{SCE} \cdot di/dt$ |   | $I_{sc}$    |      | 1750 | A         |
| Thermal resistance, junction to case<br>结-外壳热阻 | Per IGBT  |   | $R_{th,jc}$ |      |      | 0.205 K/W |

## 5. Diode, Inverter

### 5.1 Maximum Rated Values

| Parameter                                   | Note or test condition | Symbol    | Values | Unit |
|---|------------------------|-----------|--------|------|
| Repetitive peak reverse voltage<br>反向重复峰值电压 | $T_{vj} = 25^\circ C$  | $V_{RRM}$ | 1200   | V    |
| Continuous DC forward current<br>连续正向直流电流   |                        | $I_F$     | 200    | A    |
| Repetitive peak forward current<br>正向重复峰值电流 | $t_p = 1 ms$           | $I_{FRM}$ | 400    | A    |

### 5.2 Characteristic value

| Parameter               | Note or test condition    | Symbol | Values |      |      | Unit |
|-------------------------|---------------------------|--------|--------|------|------|------|
|                         |                           |        | Min.   | Typ. | Max. |      |
| Forward voltage<br>正向电压 | $I_F = 200A, V_{GE} = 0V$ | $V_F$  |        | 1.78 | V    |      |
|                         |                           |        |        | 1.93 | V    |      |
|                         |                           |        |        | 1.91 | V    |      |

(table continues...) 待续

| Parameter                                      | Note or test condition                         |                        | Symbol      | Values |      |      | Unit    |
|--|--|------------------------|-------------|--------|------|------|---------|
|  |  |                        |             | Min.   | Typ. | Max. |         |
| Peak reverse recovery current<br>反向恢复峰值电流      | $I_F = 200A, V_R = 600V$                       | $T_{vj} = 25^\circ C$  | $I_{RM}$    |        | 193  |      | A       |
|  | $V_{GE} = -15V, -di_F/dt = 2210 A/\mu s$       | $T_{vj} = 125^\circ C$ |             |        | 203  |      | A       |
|  | $R_{G,off} = 3.3\Omega (T_{vj} = 150^\circ C)$ | $T_{vj} = 150^\circ C$ |             |        | 208  |      | A       |
| Recovered charge<br>恢复电荷                       | $I_F = 200A, V_R = 600V$                       | $T_{vj} = 25^\circ C$  | $Q_r$       |        | 17.4 |      | $\mu C$ |
|  | $V_{GE} = -15V, -di_F/dt = 2210 A/\mu s$       | $T_{vj} = 125^\circ C$ |             |        | 29.1 |      | $\mu C$ |
|  | $R_{G,off} = 3.3\Omega (T_{vj} = 150^\circ C)$ | $T_{vj} = 150^\circ C$ |             |        | 33.8 |      | $\mu C$ |
| Reverse recovery energy<br>反向恢复损耗 (每脉冲)        | $I_F = 200A, V_R = 600V$                       | $T_{vj} = 25^\circ C$  | $E_{rec}$   |        | 4.81 |      | mJ      |
|  | $V_{GE} = -15V, -di_F/dt = 2210 A/\mu s$       | $T_{vj} = 125^\circ C$ |             |        | 9.90 |      | mJ      |
|  | $R_{G,off} = 3.3\Omega (T_{vj} = 150^\circ C)$ | $T_{vj} = 150^\circ C$ |             |        | 11.9 |      | mJ      |
| Thermal resistance, junction to case<br>结—外壳热阻 | Per diode                                      |                        | $R_{th,Jc}$ |        |      | 0.45 | K/W     |

## 6. Diode, Rectifier

### 6.1 Maximum Rated Values

| Parameter                                      | Note or test condition              | Symbol    | Values | Unit   |
|--|-------------------------------------|-----------|--------|--------|
| Repetitive peak reverse voltage<br>反向重复峰值电压    | $T_{vj} = 25^\circ C$               | $V_{RRM}$ | 1600   | V      |
| Average Rectified Output current<br>整流器输出均方根电流 | $V_F = 1.2, T_{vj} = 150^\circ C$   | $I_F$     | 150    | A      |
| Surge forward current<br>正向浪涌电流                | $t_p = 10 ms, T_{vj} = 150^\circ C$ | $I_{FSM}$ | 1120   | A      |
| $I^2t$ - value<br>$I^2t$ -值                    | $t_p = 10 ms, T_{vj} = 150^\circ C$ | $I^2t$    | 6672   | $A^2s$ |

### 6.2 Characteristic value

| Parameter                                      | Note or test condition               | Symbol      | Values |      |      | Unit |
|--|--------------------------------------|-------------|--------|------|------|------|
|  |                                      |             | Min.   | Typ. | Max. |      |
| Forward voltage<br>正向电压                        | $T_{vj} = 150^\circ C, I_F = 150 A$  | $V_F$       |        | 1.0  |      | V    |
| Reverse current<br>反向电流                        | $T_{vj} = 150^\circ C, V_R = 1600 V$ | $I_R$       |        | 1    |      | mA   |
| Thermal resistance, junction to case<br>结—外壳热阻 | Per diode                            | $R_{th,Jc}$ |        |      | 0.35 | K/W  |

## 7. IGBT, Brake-Chopper

### 7.1 Maximum Rated Values

| Parameter                                    | Note or test condition  | Symbol              | Values | Unit |
|--|---|---------------------|--------|------|
| Collector-emitter voltage<br>集电极—发射极间电压      | $T_{vj} = 25^{\circ}\text{C}$   | $V_{CES}$           | 1200   | V    |
| Continuous DC collector current<br>连续集电极电流   | $T_C = 100^{\circ}\text{C}, T_{vj} \text{ max} = 150^{\circ}\text{C}$ | $I_{C \text{ nom}}$ | 150    | A    |
| Repetitive peak collector current<br>集电极峰值电流 | $t_P = 1 \text{ ms}$  | $I_{CRM}$           | 300    | A    |
| Total power dissipation<br>总功率损耗             | $T_C = 25^{\circ}\text{C}, T_{vj} \text{ max} = 175^{\circ}\text{C}$  | $P_{\text{tot}}$    | 540    | W    |
| Gate-emitter peak voltage<br>栅极—发射极峰值电压      |   | $V_{GES}$           | +/- 20 | V    |

### 7.2 Characteristic value

| Parameter   | Note or test condition   | Symbol               | Values |                                |      | Unit          |
|---|--|----------------------|--------|--------------------------------|------|---------------|
|   |  |                      | Min.   | Typ.                           | Max. |               |
| Collector-emitter saturation voltage<br>集电极—发射极饱和电压 | $I_C = 150 \text{ A}, V_{GE} = 15 \text{ V}$   | $V_{CE, \text{sat}}$ |        | $T_{vj} = 25^{\circ}\text{C}$  | 1.45 | V             |
|   |  |                      |        | $T_{vj} = 125^{\circ}\text{C}$ | 1.59 | V             |
|   |  |                      |        | $T_{vj} = 150^{\circ}\text{C}$ | 1.63 | V             |
| Gate threshold voltage<br>栅极阈值电压                    | $I_C = 5.7 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$   | $V_{GE, \text{th}}$  | 5.0    | 5.8                            | 6.5  | V             |
| Gate charge<br>栅极电荷                                 | $V_{GE} = -15 \text{ V} \dots +15 \text{ V}$   | $Q_G$                |        | 1.73                           |      | $\mu\text{C}$ |
| Internal gate resistor<br>内部栅极电阻                    | $T_{vj} = 25^{\circ}\text{C}$  | $R_{G \text{ int}}$  |        | 2.10                           |      | $\Omega$      |
| Input capacitance<br>输入电容                           | $f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$                  | $C_{\text{ies}}$     |        | 21.6                           |      | nF            |
| Reverse transfer capacitance<br>反向传输电容              | $f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$                  | $C_{\text{res}}$     |        | 0.17                           |      | nF            |
| Collector-emitter cut-off current<br>集电极-发射极截止电流    | $V_{CE} = 1200 \text{ V}, V_{GE} = 0 \text{ V}, T_{vj} = 25^{\circ}\text{C}$                                   | $I_{CES}$            |        |                                | 1    | mA            |
| Gate-emitter leakage current<br>栅极-发射极漏电流           | $V_{CE} = 0 \text{ V}, V_{GE} = 20 \text{ V}, T_{vj} = 25^{\circ}\text{C}$                                     | $I_{GES}$            |        |                                | 100  | nA            |
| Turn-on delay time, inductive load<br>开通延迟时间        | $I_C = 150 \text{ A}, V_{CE} = 600 \text{ V}$<br>$V_{GE} = +15/-15 \text{ V}$<br>$R_{G, \text{on}} = 5 \Omega$ | $t_{d, \text{on}}$   |        | $T_{vj} = 25^{\circ}\text{C}$  | 0.20 | us            |
|   |  |                      |        | $T_{vj} = 125^{\circ}\text{C}$ | 0.21 | us            |
|   |  |                      |        | $T_{vj} = 150^{\circ}\text{C}$ | 0.21 | us            |
| Rise time, inductive load<br>上升时间                   | $I_C = 150 \text{ A}, V_{CE} = 600 \text{ V}$<br>$V_{GE} = +15/-15 \text{ V}$<br>$R_{G, \text{on}} = 5 \Omega$ | $t_r$                |        | $T_{vj} = 25^{\circ}\text{C}$  | 0.06 | us            |
|   |  |                      |        | $T_{vj} = 125^{\circ}\text{C}$ | 0.07 | us            |
|   |  |                      |        | $T_{vj} = 150^{\circ}\text{C}$ | 0.07 | us            |

(table continues...) 待续

| Parameter                                      | Note or test condition  | Symbol   | Values             |      |      | Unit |
|--|---|--|--------------------|------|------|------|
|  |   |  | Min.               | Typ. | Max. |      |
| Turn-off delay time, inductive load<br>关断延迟时间  | I <sub>C</sub> = 150A, V <sub>CE</sub> = 600V<br>V <sub>GE</sub> = +15/-15V<br>R <sub>G,off</sub> = 5Ω  | T <sub>vj</sub> = 25°C<br>T <sub>vj</sub> = 125°C<br>T <sub>vj</sub> = 150°C | t <sub>d,off</sub> |      | 0.38 | us   |
|  |   |  |                    |      | 0.42 | us   |
|  |   |  |                    |      | 0.44 | us   |
| Fall time, inductive load<br>下降时间              | I <sub>C</sub> = 150A, V <sub>CE</sub> = 600V<br>V <sub>GE</sub> = +15/-15V<br>R <sub>G,off</sub> = 5Ω  | T <sub>vj</sub> = 25°C<br>T <sub>vj</sub> = 125°C<br>T <sub>vj</sub> = 150°C | t <sub>f</sub>     |      | 0.19 | us   |
|  |   |  |                    |      | 0.27 | us   |
|  |   |  |                    |      | 0.28 | us   |
| Turn-on energy loss per pulse<br>开通损耗能量        | I <sub>C</sub> = 150A, V <sub>CE</sub> = 600V, L <sub>S</sub> =30nH<br>V <sub>GE</sub> = +15/-15V, di/dt =1660A/μs<br>R <sub>G,on</sub> = 5Ω (T <sub>vj</sub> = 150°C)                      | T <sub>vj</sub> = 25°C<br>T <sub>vj</sub> = 125°C<br>T <sub>vj</sub> = 150°C | E <sub>on</sub>    |      | 11.9 | mJ   |
|  |   |  |                    |      | 15.9 | mJ   |
|  |   |  |                    |      | 17.7 | mJ   |
| Turn-off energy loss per pulse<br>关断损耗能量       | I <sub>C</sub> = 150A, V <sub>CE</sub> = 600V, L <sub>S</sub> =30nH<br>V <sub>GE</sub> = +15/-15V, dv/dt =4380V/μs<br>R <sub>G,off</sub> = 5Ω (T <sub>vj</sub> = 150°C)                     | T <sub>vj</sub> = 25°C<br>T <sub>vj</sub> = 125°C<br>T <sub>vj</sub> = 150°C | E <sub>off</sub>   |      | 10.5 | mJ   |
|  |   |  |                    |      | 15.3 | mJ   |
|  |   |  |                    |      | 16.6 | mJ   |
| SC data<br>短路数据                                | V <sub>GE</sub> ≤ 15V, V <sub>CC</sub> = 600V, t <sub>p</sub> ≤ 8 μs, T <sub>vj</sub> = 150°C,<br>C <sub>GE</sub> = 0.0uF, V <sub>CEmax</sub> = V <sub>CES</sub> - L <sub>SCE</sub> · di/dt | I <sub>sc</sub>  |                    | 1320 |      | A    |
| Thermal resistance, junction to case<br>结-外壳热阻 | Per IGBT  | R <sub>th,jc</sub>   |                    |      | 0.26 | K/W  |

## 8. Diode, Brake-Chopper

### 8.1 Maximum Rated Values

| Parameter                                   | Note or test condition | Symbol           | Values | Unit |
|---|------------------------|------------------|--------|------|
| Repetitive peak reverse voltage<br>反向重复峰值电压 | T <sub>vj</sub> = 25°C | V <sub>RRM</sub> | 1200   | V    |
| Continuous DC forward current<br>连续正向直流电流   |                        | I <sub>F</sub>   | 100    | A    |
| Repetitive peak forward current<br>正向重复峰值电流 | t <sub>p</sub> = 1 ms  | I <sub>FRM</sub> | 200    | A    |

### 8.2 Characteristic value

| Parameter               | Note or test condition                        | Symbol         | Values |      |      | Unit |
|-------------------------|---|----------------|--------|------|------|------|
|                         |   |                | Min.   | Typ. | Max. |      |
| Forward voltage<br>正向电压 | I <sub>F</sub> = 100 A, V <sub>GE</sub> = 0 V | V <sub>F</sub> |        |      | 1.58 | V    |
|                         |   |                |        |      | 1.65 | V    |
|                         |   |                |        |      | 1.62 | V    |

(table continues...) 待续

| Parameter                                      | Note or test condition                       | Symbol                 | Values    |      |      | Unit    |
|--|--|------------------------|-----------|------|------|---------|
|  |  |                        | Min.      | Typ. | Max. |         |
| Peak reverse recovery current<br>反向恢复峰值电流      | $I_F = 100A, V_R = 600V$                     | $T_{vj} = 25^\circ C$  |           | 118  |      | A       |
|  | $V_{GE} = -15V, -di_F/dt = 1730 A/\mu s$     | $T_{vj} = 125^\circ C$ | $I_{RM}$  | 119  |      | A       |
|  | $R_{G,off} = 5\Omega (T_{vj} = 150^\circ C)$ | $T_{vj} = 150^\circ C$ |           | 122  |      | A       |
| Recovered charge<br>恢复电荷                       | $I_F = 100A, V_R = 600V$                     | $T_{vj} = 25^\circ C$  |           | 9.00 |      | $\mu C$ |
|  | $V_{GE} = -15V, -di_F/dt = 1730 A/\mu s$     | $T_{vj} = 125^\circ C$ | $Q_r$     | 15.9 |      | $\mu C$ |
|  | $R_{G,off} = 5\Omega (T_{vj} = 150^\circ C)$ | $T_{vj} = 150^\circ C$ |           | 18.6 |      | $\mu C$ |
| Reverse recovery energy<br>反向恢复损耗 (每脉冲)        | $I_F = 100A, V_R = 600V$                     | $T_{vj} = 25^\circ C$  |           | 2.01 |      | mJ      |
|  | $V_{GE} = -15V, -di_F/dt = 1730 A/\mu s$     | $T_{vj} = 125^\circ C$ | $E_{rec}$ | 5.21 |      | mJ      |
|  | $R_{G,off} = 5\Omega (T_{vj} = 150^\circ C)$ | $T_{vj} = 150^\circ C$ |           | 6.30 |      | mJ      |
| Thermal resistance, junction to case<br>结-外壳热阻 | Per diode                                    | $R_{th,Jc}$            |           |      | 0.48 | K/W     |

## 9. NTC-Thermistor

### 9.1 Characteristic value





| Parameter                 | Note or test condition                               | Symbol           | Values |      |      | Unit      |
|---------------------------|--|------------------|--------|------|------|-----------|
|                           |  |                  | Min.   | Typ. | Max. |           |
| Rated resistance<br>额定电阻值 | $T_c = 25^\circ C$                                   | $R_{25}$         |        | 5.00 |      | $K\Omega$ |
| Power dissipation<br>耗散功耗 | $T_c = 25^\circ C$                                   | $P_{25}$         |        |      | 20   | mW        |
| B-value<br>B-Z 值          | $R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298, 15K))]$ | $B_{25}/B_{50}$  |        | 3375 |      |           |
| B-value<br>B-Z 值          | $R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298, 15K))]$ | $B_{25}/B_{75}$  |        | 3408 |      |           |
| B-value<br>B-Z 值          | $R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298, 15K))]$ | $B_{25}/B_{100}$ |        | 3435 |      |           |



## 10. Module

### 10.1 Characteristic value

| Parameter                            | Note or test condition | Symbol     | Values |      |      | Unit |
|--------------------------------------|------------------------|------------|--------|------|------|------|
|                                      |                        |            | Min.   | Typ. | Max. |      |
| Isolation Voltage<br>隔离电压            | RMS, f=50HZ,1min       | $V_{ISOL}$ |        |      | 2500 | V    |
| Stray inductance module<br>杂散电感      |                        | $L_{SCE}$  |        | 25   |      | nH   |
| Operation Junction Temperature<br>结温 |                        | $T_{jop}$  | -40    |      | 150  | °C   |
| Storage Temperature Range<br>存储温度范围  |                        | $T_{stg}$  | -40    |      | 125  | °C   |
| Mounting Torque<br>安装扭矩              | Screw M5               | M          | 3      |      | 6    | N.m  |
| Weight of Module<br>重量               |                        | G          |        | 300  |      | g    |



### 11. Characteristics diagrams
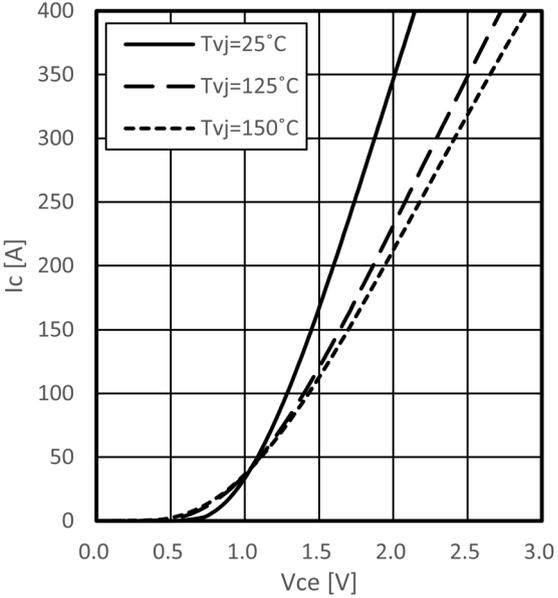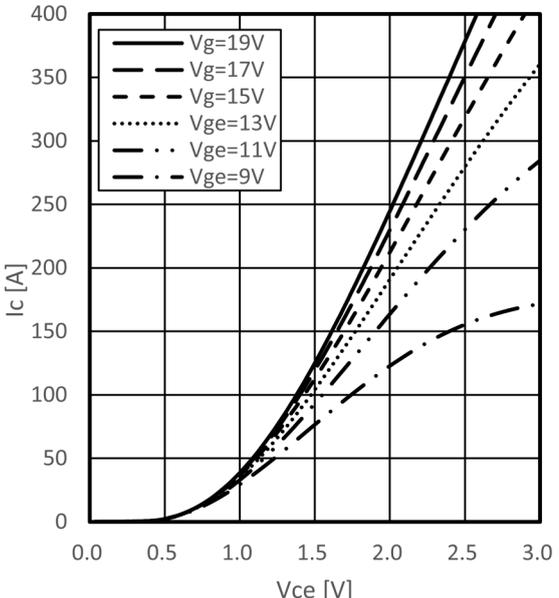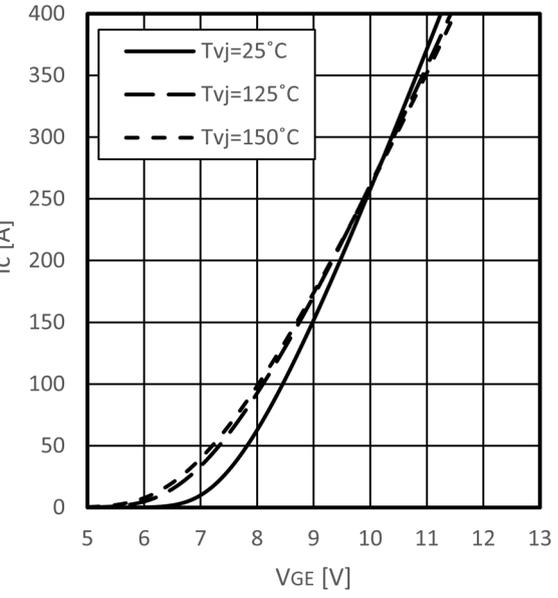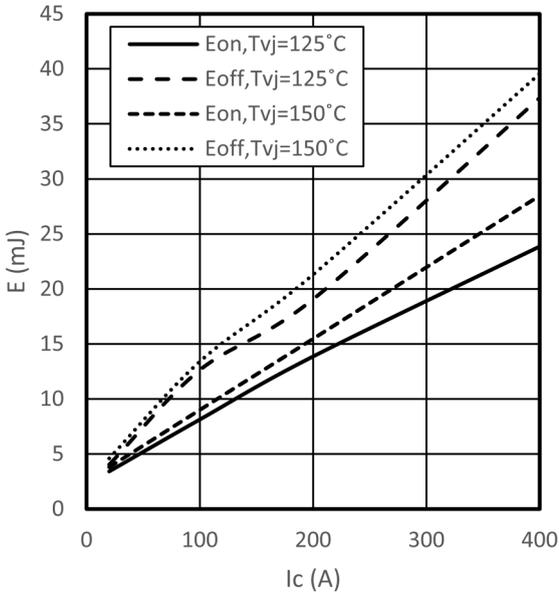
|   |  |
|---|--|
|                              |    |
| <p><b>Output characteristic IGBT, Inverter (typical)</b><br/> <math>I_c = f(V_{CE}) V_{GE} = 15V</math></p>   | <p><b>Output characteristic IGBT, Inverter (typical)</b><br/> <math>I_c = f(V_{CE}) T_{vj} = 150^\circ C</math></p>  |
|                            |    |
| <p><b>Transfer characteristic IGBT, Inverter (typical)</b><br/> <math>I_c = f(V_{GE}) V_{CE} = 20V</math></p> | <p><b>Switching losses IGBT, Inverter (typical)</b><br/> <math>E_{on} = f(I_c), E_{off} = f(I_c) V_{GE} = \pm 15V, R_{Gon} = 3.3 \Omega, R_{Goff} = 3.3 \Omega, V_{CE} = 600V</math></p> |

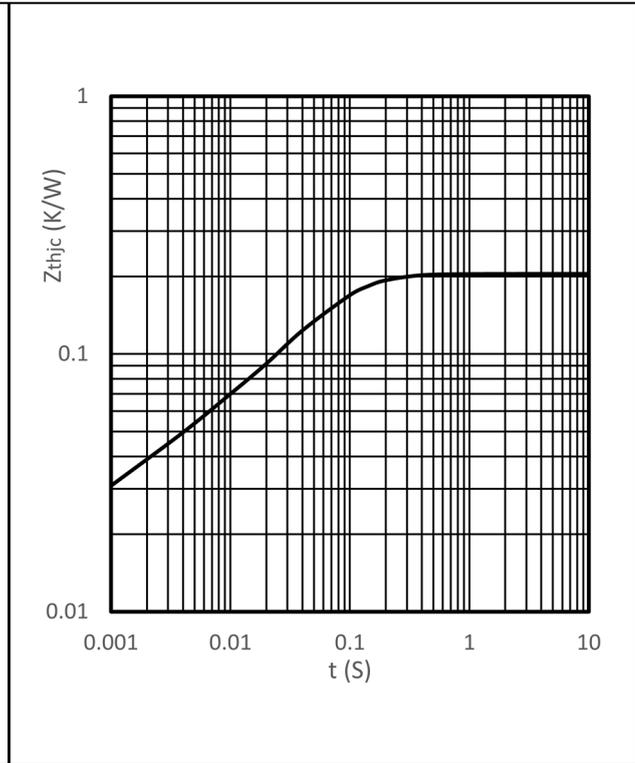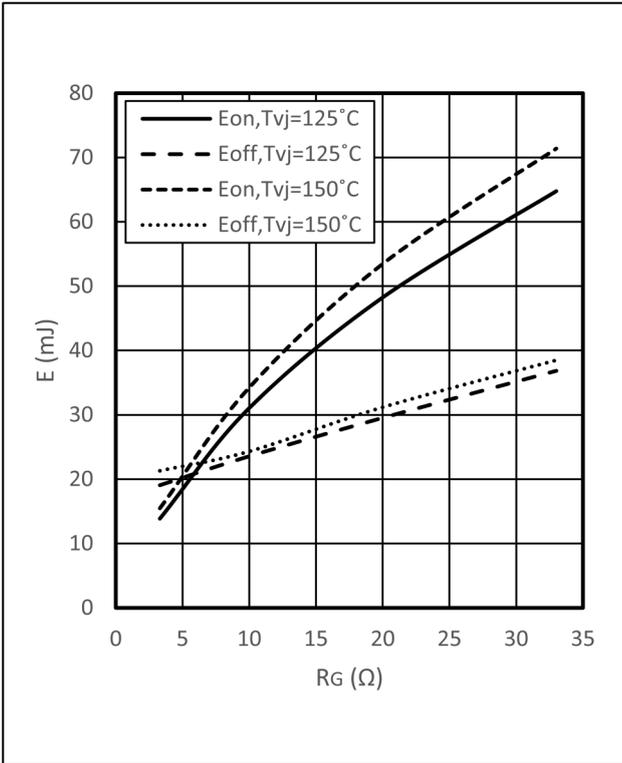



**Switching losses IGBT, Inverter (typical)**  
 $E_{on} = f(R_G)$ ,  $E_{off} = f(R_G)$   $V_{GE} = \pm 15V$ ,  $I_C = 200A$ ,  $V_{CE} = 600V$

**Transient thermal impedance IGBT, Inverter**  
 $Z_{thjc} = f(t)$

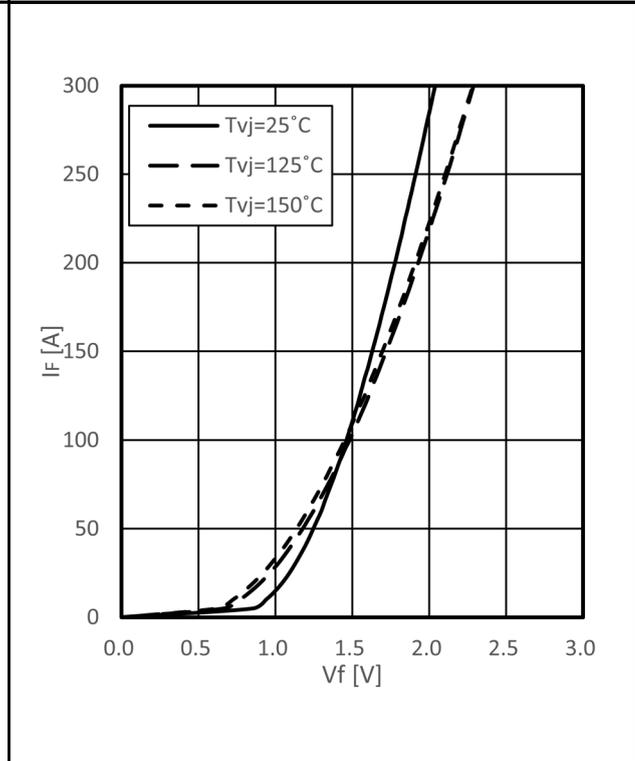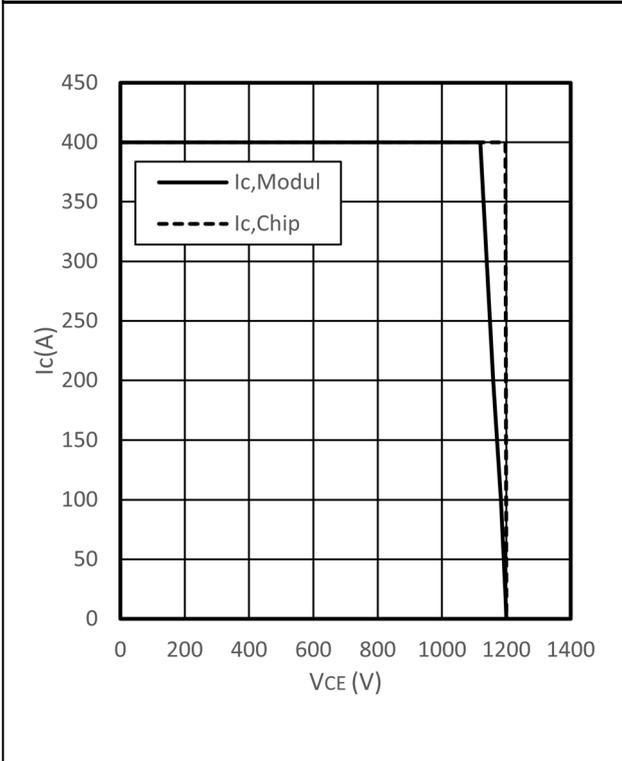



**Reverse bias safe operating area IGBT, Inverter (RBSOA)**  
 $I_C = f(V_{CE})$   $V_{GE} = \pm 15V$   $R_{Goff} = 3.3\Omega$ ,  $T_{vj} = 150^\circ C$

**Forward characteristic of Diode, Inverter (typical)**  
 $I_F = f(V_F)$

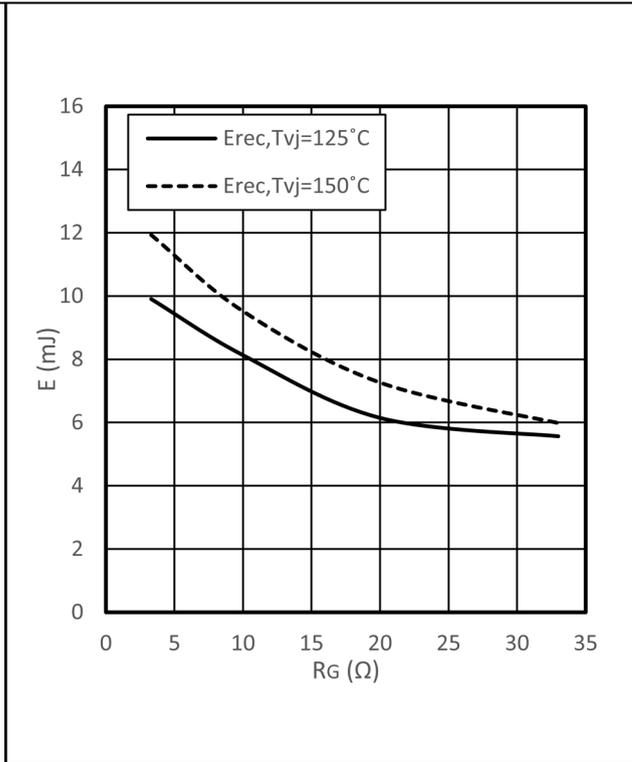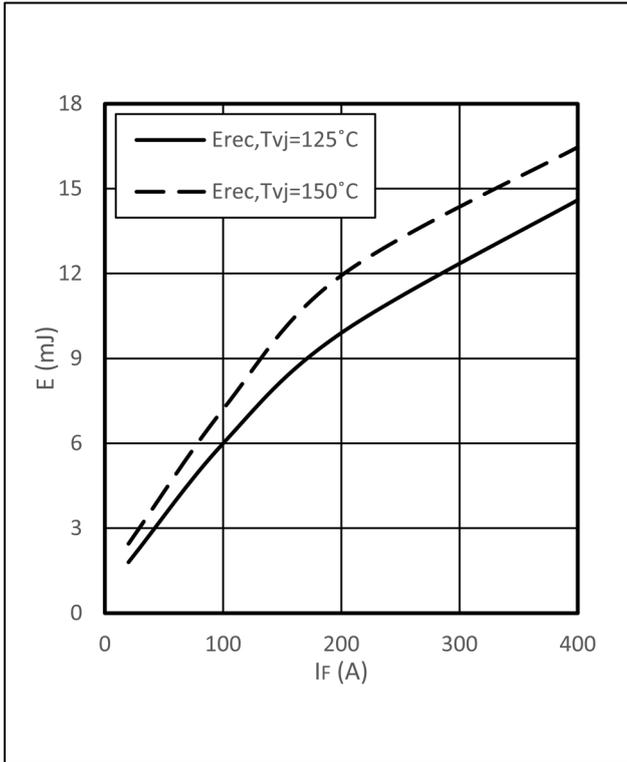



**Switching losses Diode, Inverter (typical)**  
 $E_{rec} = f(I_F)$ ,  $R_g = 3.3\Omega$ ,  $V_{CE} = 600V$

**Switching losses Diode, Inverter (typical)**  
 $E_{rec} = f(R_g)$ ,  $I_F = 200A$ ,  $V_{CE} = 600V$

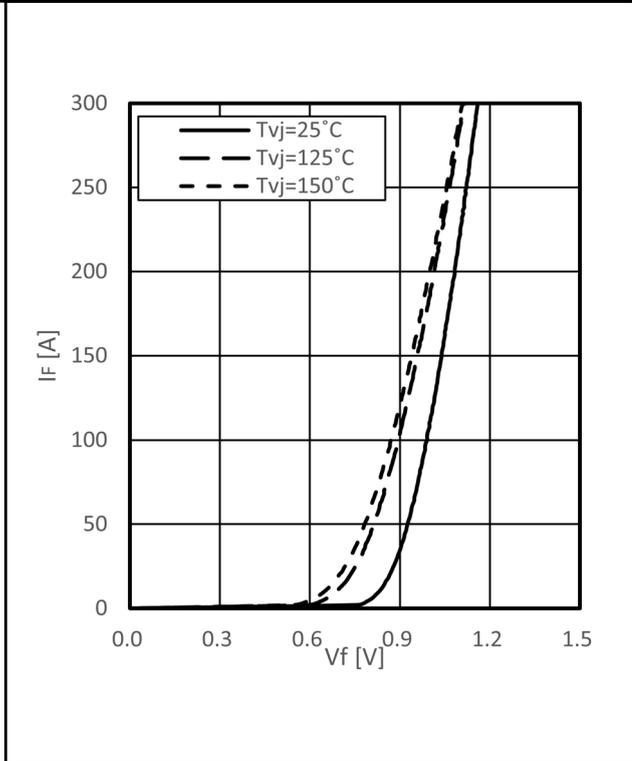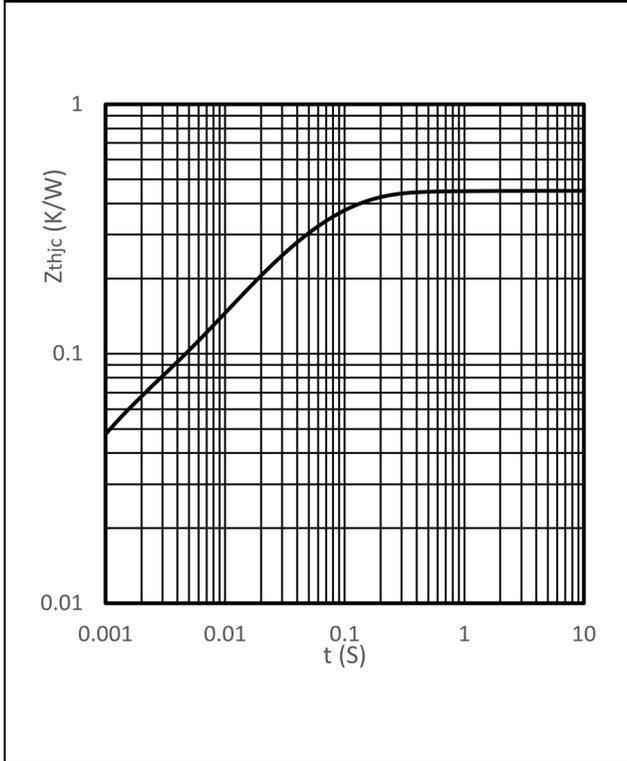

**Transient thermal impedance Diode Inverter**  
 $Z_{thjC} = f(t)$

**Forward characteristic of Diode, Rectifier (typical)**  
 $I_F = f(V_F)$

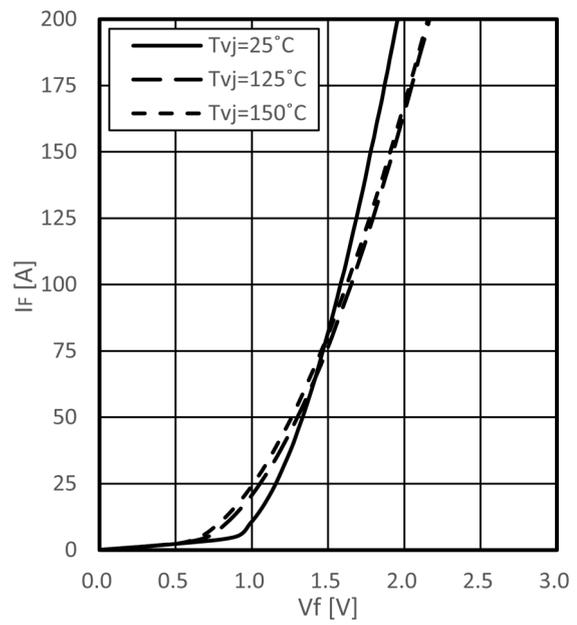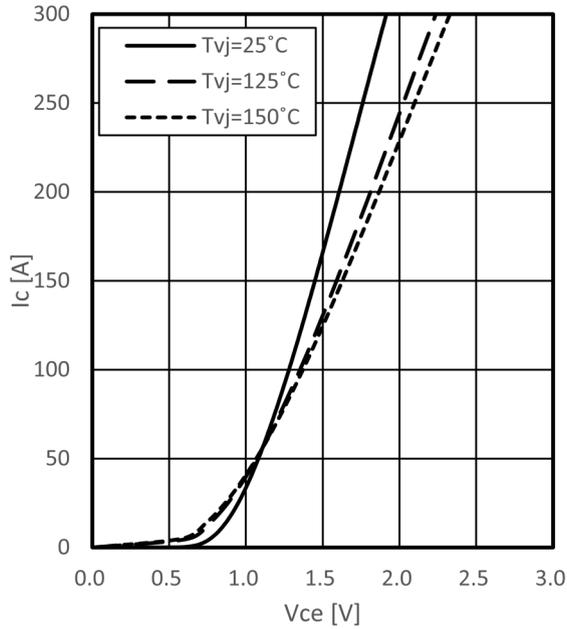


Output characteristic IGBT, Brake-Chopper (typical)

$I_c = f(V_{ce})$   $V_{GE} = 15V$

Forward characteristic of Diode, Brake-Chopper (typical)

$I_F = f(V_f)$

$I_F = f(V_f)$

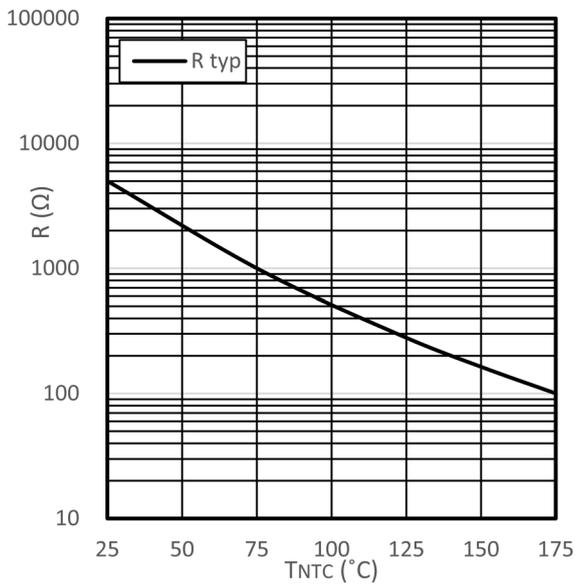

NTC-Thermistor-temperature characteristic (typical)

$R=f(T)$

## 12. Circuit Diagram

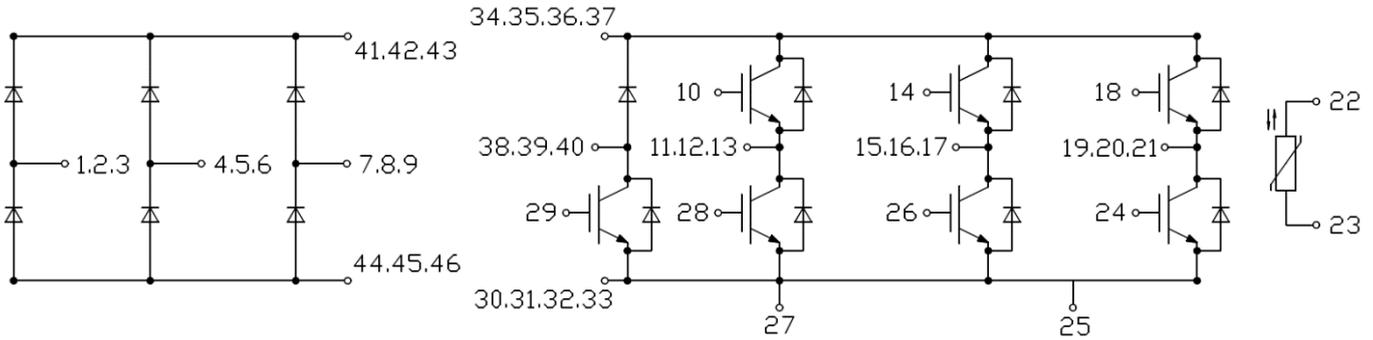


Figure 3

## 13. Package Outlines

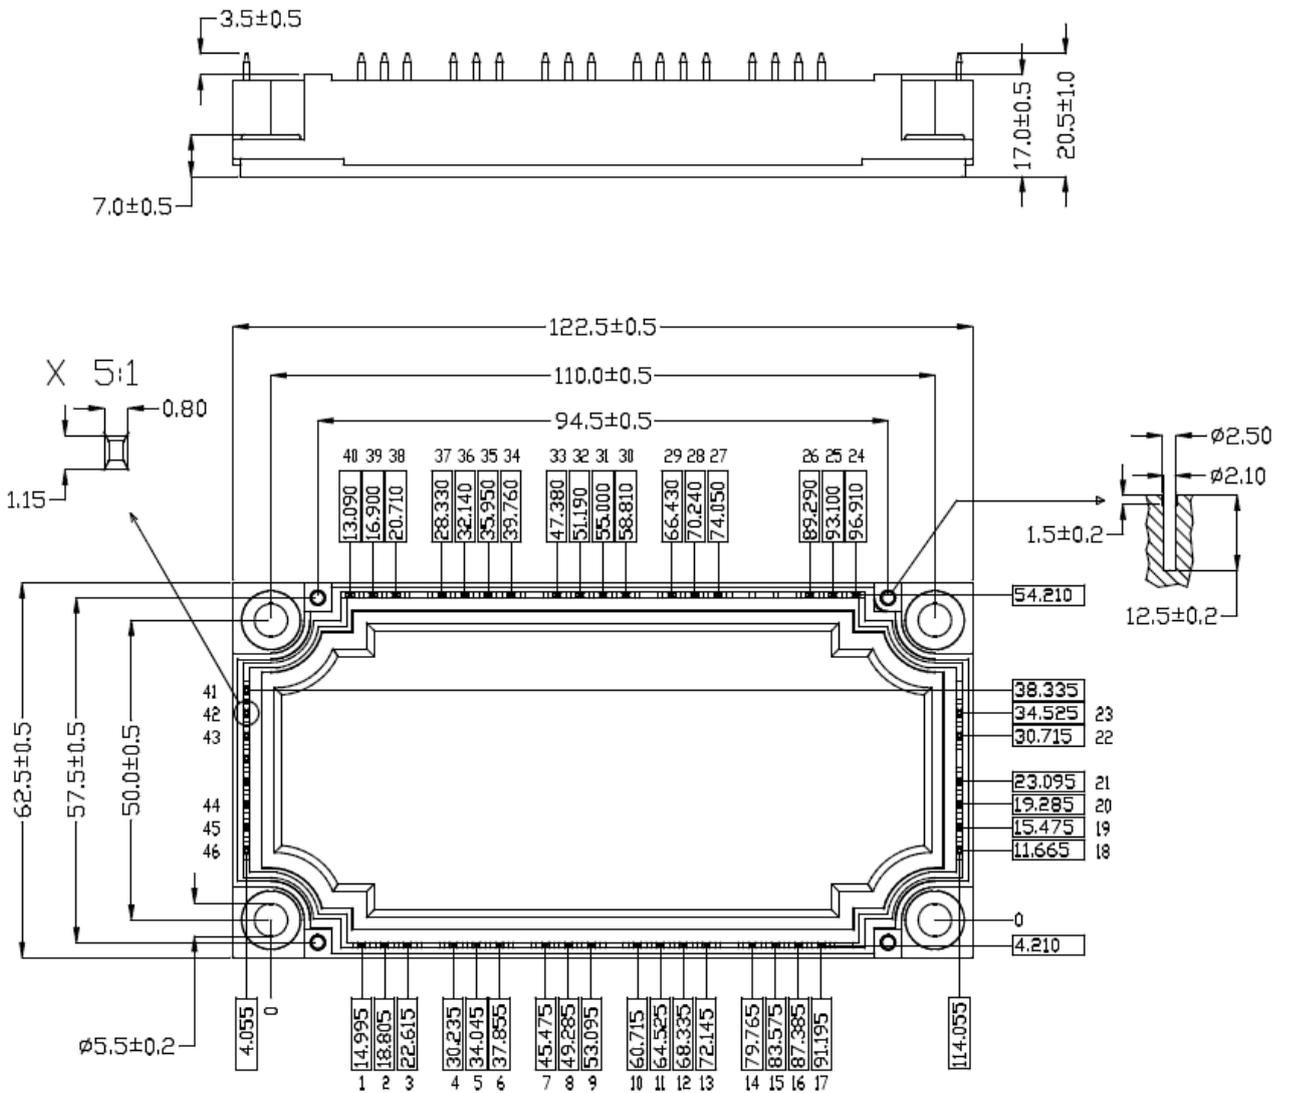


Figure 4