

1. Product Features

1.1 Electrical features

- $V_{CES}=1700V$
- $I_{C\ nom}=600A / I_{CRM}=1200A$
- Low switching losses
- Low inductance
- Fast switching and short tail current
- Integrated NTC temperature sensor
- High power and thermal cycling capability



Figure1 IGBT Module

1.2 Mechanical features

- Integrated NTC temperature sensor
- High power and thermal cycling capability
- Al_2O_3 substrate with low thermal resistance
- Copper base plate

2. Typical Applications

- Switching mode power supply
- Drive inverters with brake system
- Uninterruptible power supply
- AC and DC servo drive amplifier

3. Description

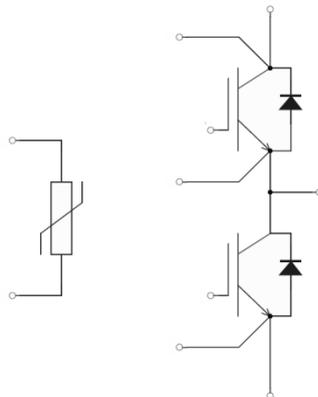


Figure 2 Dual

4. IGBT, Inverter

4.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Collector-emitter voltage 集电极—发射极间电压	$T_{vj} = 25^{\circ}\text{C}$	V_{CES}	1700	V
Continuous DC collector current 连续集电极电流	$T_C = 100^{\circ}\text{C}, T_{vj, max} = 150^{\circ}\text{C}$	$I_{C nom}$	600	A
Repetitive peak collector current 集电极峰值电流	$t_P = 1 \text{ ms}$	I_{CRM}	1200	A
Total power dissipation 总功率损耗	$T_C = 25^{\circ}\text{C}, T_{vj, max} = 175^{\circ}\text{C}$	P_{tot}	1595	W
Gate-emitter peak voltage 栅极—发射极峰值电压		V_{GES}	+/- 20	V

4.2 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Collector-emitter saturation voltage 集电极—发射极饱和电压	$I_C = 600 \text{ A}, V_{GE} = 15 \text{ V}$	$V_{CE, sat}$		$T_{vj} = 25^{\circ}\text{C}$	1.72	V
				$T_{vj} = 125^{\circ}\text{C}$	2.12	V
				$T_{vj} = 150^{\circ}\text{C}$	2.23	V
Gate threshold voltage 栅极阈值电压	$I_C = 3 \text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$	$V_{GE, th}$	5.1	5.5	6.1	V
Gate charge 栅极电荷	$V_{GE} = -15 \text{ V} \dots +15 \text{ V}$	Q_G		4.5		μC
Internal gate resistor 内部栅极电阻	$T_{vj} = 25^{\circ}\text{C}$	R_{Gint}		3.60		Ω
Input capacitance 输入电容	$f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$	C_{ies}		68.9		nF
Reverse transfer capacitance 反向传输电容	$f = 1 \text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25 \text{ V}, V_{GE} = 0 \text{ V}$	C_{res}		2.9		nF
Collector-emitter cut-off current 集电极-发射极截止电流	$V_{CE} = 1700 \text{ V}, V_{GE} = 0 \text{ V}, T_{vj} = 25^{\circ}\text{C}$	I_{CES}			5	mA
Gate-emitter leakage current 栅极-发射极漏电流	$V_{CE} = 0 \text{ V}, V_{GE} = 20 \text{ V}, T_{vj} = 25^{\circ}\text{C}$	I_{GES}			300	nA
Turn-on delay time, inductive load 开通延迟时间	$I_C = 600 \text{ A}, V_{CE} = 900 \text{ V}$ $V_{GE} = +15/-15 \text{ V}$ $R_{G, on} = 3.3 \Omega$	$t_{d, on}$		$T_{vj} = 25^{\circ}\text{C}$	0.225	μs
				$T_{vj} = 125^{\circ}\text{C}$	0.240	μs
				$T_{vj} = 150^{\circ}\text{C}$	0.245	μs
Rise time, inductive load 上升时间	$I_C = 600 \text{ A}, V_{CE} = 900 \text{ V}$ $V_{GE} = +15/-15 \text{ V}$ $R_{G, on} = 3.3 \Omega$	t_r		$T_{vj} = 25^{\circ}\text{C}$	0.122	μs
				$T_{vj} = 125^{\circ}\text{C}$	0.144	μs
				$T_{vj} = 150^{\circ}\text{C}$	0.152	μs

(table continues...) 待续

Parameter	Note or test condition		Symbol	Values			Unit
				Min.	Typ.	Max.	
Turn-off delay time, inductive load 关断延迟时间	$I_C = 600A, V_{CE} = 900V$ $V_{GE} = +15/-15V$ $R_{G,off} = 3.3\Omega$	$T_{vj} = 25^\circ C$	$t_{d,off}$		0.647		us
		$T_{vj} = 125^\circ C$			0.730		us
		$T_{vj} = 150^\circ C$			0.743		us
Fall time, inductive load 下降时间	$I_C = 600A, V_{CE} = 900V$ $V_{GE} = +15/-15V$ $R_{G,off} = 3.3\Omega$	$T_{vj} = 25^\circ C$	t_f		0.202		us
		$T_{vj} = 125^\circ C$			0.193		us
		$T_{vj} = 150^\circ C$			0.193		us
Turn-on energy loss per pulse 开通损耗能量	$I_C = 600A, V_{CE} = 900V, L_s = 35nH$ $V_{GE} = +15/-15V, di/dt = 3100A/\mu s$ $R_{G,on} = 3.3\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 25^\circ C$	E_{on}		55		mJ
		$T_{vj} = 125^\circ C$			114		mJ
		$T_{vj} = 150^\circ C$			127		mJ
Turn-off energy loss per pulse 关断损耗能量	$I_C = 600A, V_{CE} = 900V, L_s = 35nH$ $V_{GE} = +15/-15V, dv/dt = 4500V/\mu s$ $R_{G,off} = 3.3\Omega (T_{vj} = 150^\circ C)$	$T_{vj} = 25^\circ C$	E_{off}		131		mJ
		$T_{vj} = 125^\circ C$			157		mJ
		$T_{vj} = 150^\circ C$			167		mJ
SC data 短路数据	$V_{GE} \leq 15V, V_{CC} = 900V, t_p \leq 8\mu s, T_{vj} = 150^\circ C,$ $C_{GE} = 0.0\mu F, V_{CEmax} = V_{CES} - L_{sCE} \cdot di/dt$		I_{sc}		3000		A
Thermal resistance, junction to case 结-外壳热阻	Per IGBT		$R_{th,Jc}$			0.055	K/W

5. Diode, Inverter

5.1 Maximum Rated Values

Parameter	Note or test condition	Symbol	Values	Unit
Repetitive peak reverse voltage 反向重复峰值电压	$T_{vj} = 25^\circ C$	V_{RRM}	1700	V
Continuous DC forward current 连续正向直流电流		I_F	600	A
Repetitive peak forward current 正向重复峰值电流	$t_p = 1ms$	I_{FRM}	1200	A

5.2 Characteristic value

Parameter	Note or test condition		Symbol	Values			Unit
				Min.	Typ.	Max.	
Forward voltage 正向电压	$I_F = 600A, V_{GE} = 0V$	$T_{vj} = 25^\circ C$	V_F		2.07		V
		$T_{vj} = 125^\circ C$			2.31		V
		$T_{vj} = 150^\circ C$			2.35		V

(table continues...) 待续

Parameter	Note or test condition		Symbol	Values			Unit
				Min.	Typ.	Max.	
Peak reverse recovery current 反向恢复峰值电流	$I_F = 600A, V_R = 900V$ $V_{GE} = -15V, -di_F/dt = 3100 A/\mu s$ $(T_{vj}=150^\circ C)$	$T_{vj} = 25^\circ C$	I_{RM}		636		A
		$T_{vj} = 125^\circ C$			627		A
		$T_{vj} = 150^\circ C$				617	
Recovered charge 恢复电荷	$I_F = 600A, V_R = 900V$ $V_{GE} = -15V, -di_F/dt = 3100 A/\mu s$ $(T_{vj}=150^\circ C)$	$T_{vj} = 25^\circ C$	Q_r		128		μC
		$T_{vj} = 125^\circ C$			164		μC
		$T_{vj} = 150^\circ C$				173	
Reverse recovery energy 反向恢复损耗 (每脉冲)	$I_F = 600A, V_R = 900V$ $V_{GE} = -15V, -di_F/dt = 3100 A/\mu s$ $(T_{vj}=150^\circ C)$	$T_{vj} = 25^\circ C$	E_{rec}		86		mJ
		$T_{vj} = 125^\circ C$			107		mJ
		$T_{vj} = 150^\circ C$				117	
Thermal resistance, junction to case 结—外壳热阻	Per diode		$R_{th,Jc}$			0.1	K/W

6. NTC-Thermistor

6.1 Characteristic value

Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Rated resistance 额定电阻值	$T_c = 25^\circ C$	R_{25}		5.00		K Ω
Power dissipation 耗散功耗	$T_c = 25^\circ C$	P_{25}			20	mW
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/50}(1/T_2 - 1/(298, 15K))]$	B_{25}/B_{50}		3375		K
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/75}(1/T_2 - 1/(298, 15K))]$	B_{25}/B_{75}		3408		K
B-value B-Z 值	$R_2 = R_{25} \exp[B_{25/100}(1/T_2 - 1/(298, 15K))]$	B_{25}/B_{100}		3436		K

7. Module


7.1 Characteristic value


Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Isolation Voltage 隔离电压	RMS, f=50HZ,1min	V_{ISOL}			3400	V
Stray inductance module 杂散电感		L_{SCE}		35		nH

(table continues...) 待续


Parameter	Note or test condition	Symbol	Values			Unit
			Min.	Typ.	Max.	
Operation Junction Temperature 结温		T_{jop}	-40		150	°C
Storage Temperature Range 存储温度范围		T_{stg}	-40		125	°C
Mounting Torque 安装扭矩	Screw M5	M	3		6	N.m
Weight of Module 重量		G		350		g

8. Characteristics diagrams

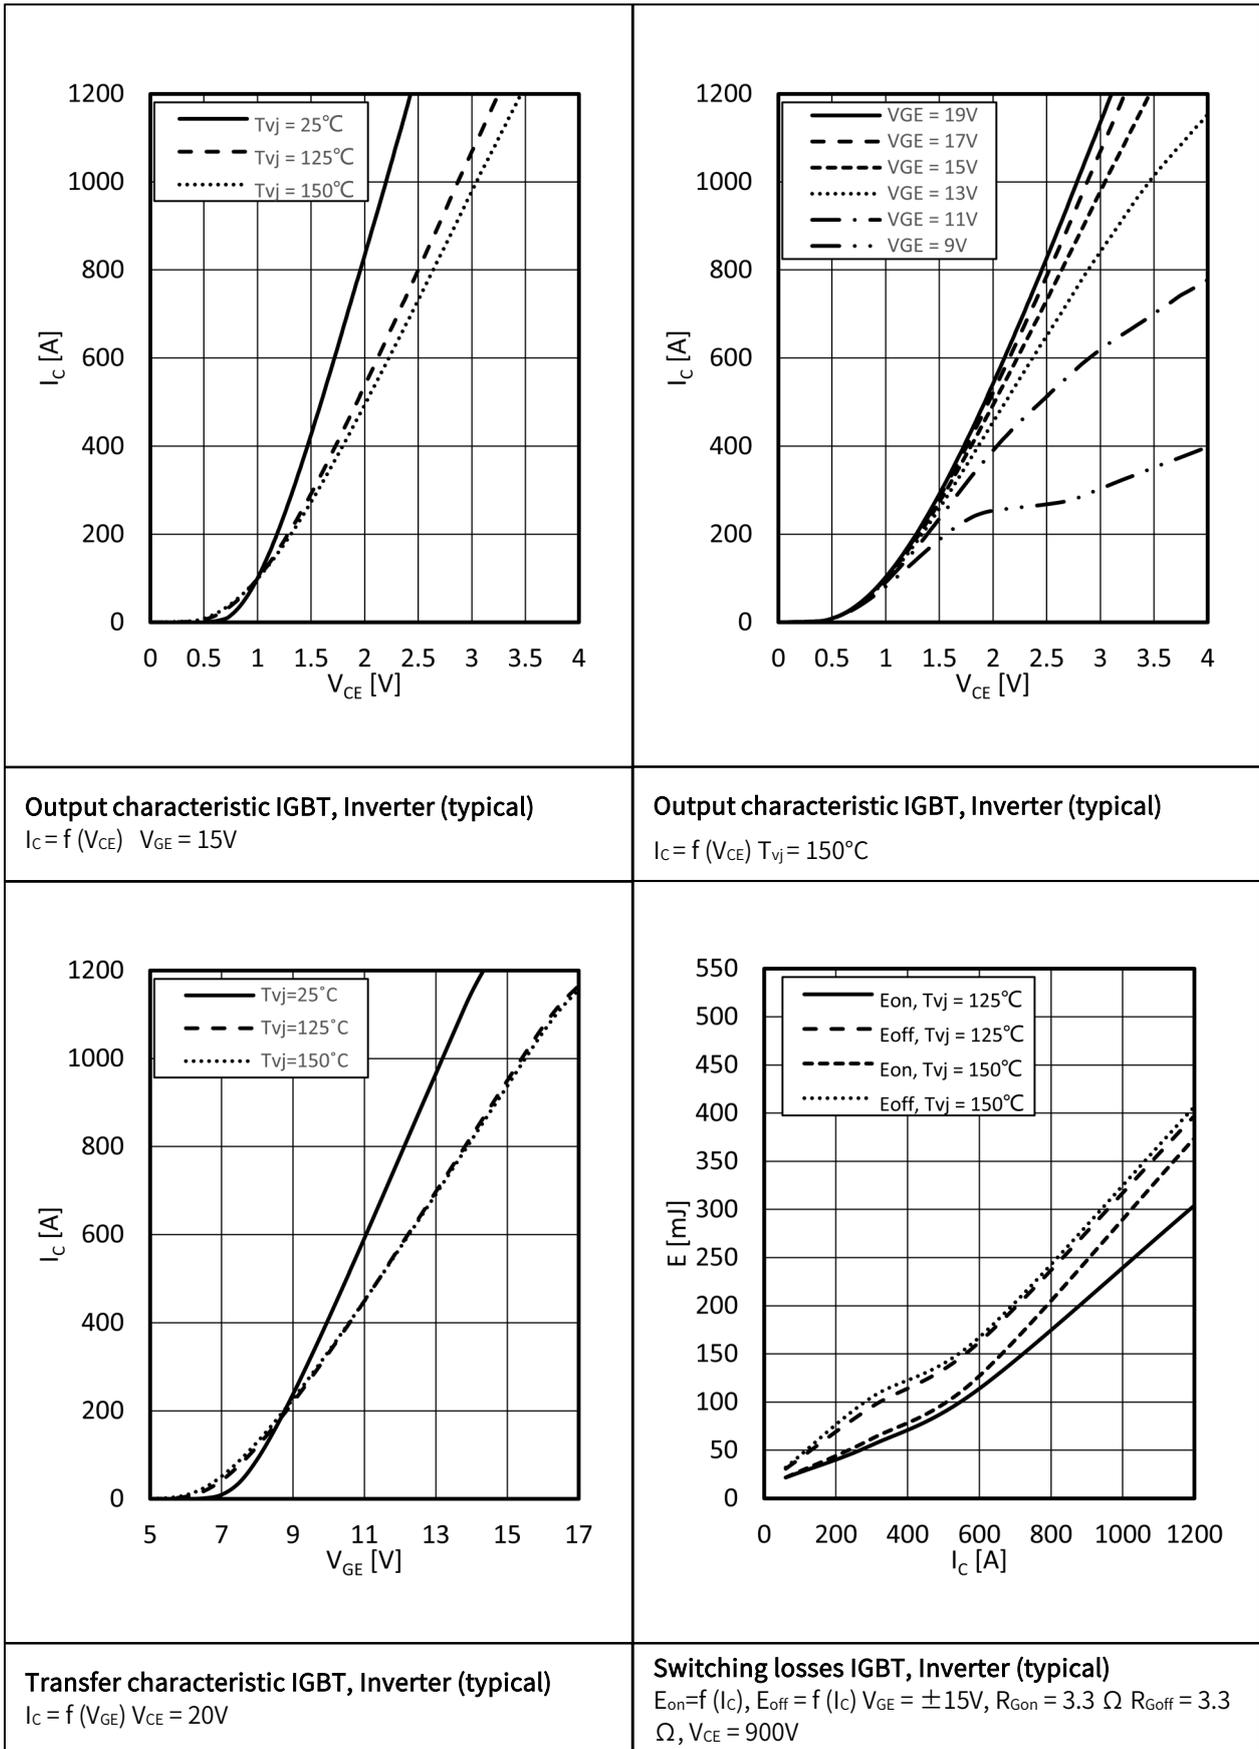


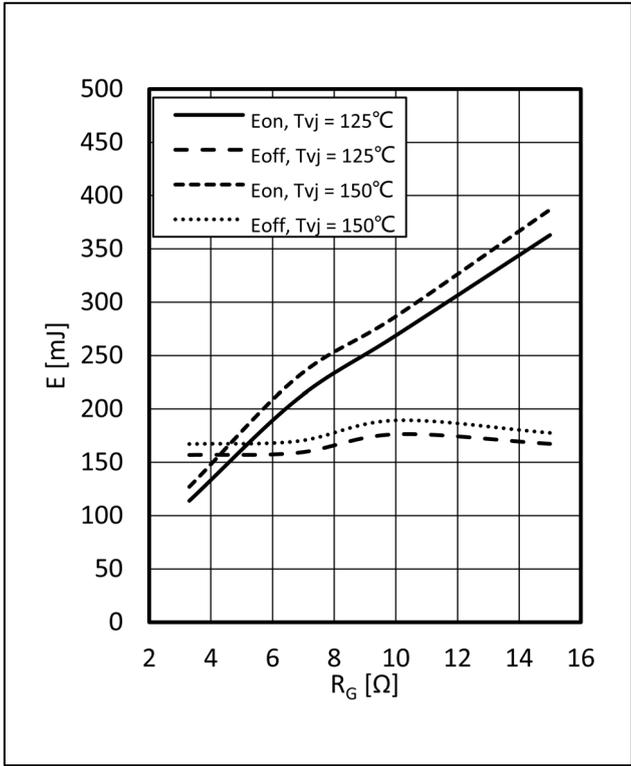


Switching losses IGBT, Inverter (typical)
 $E_{on} = f(R_G)$, $E_{off} = f(R_G)$ $V_{GE} = \pm 15V$, $I_C = 600A$, $V_{CE} = 900V$

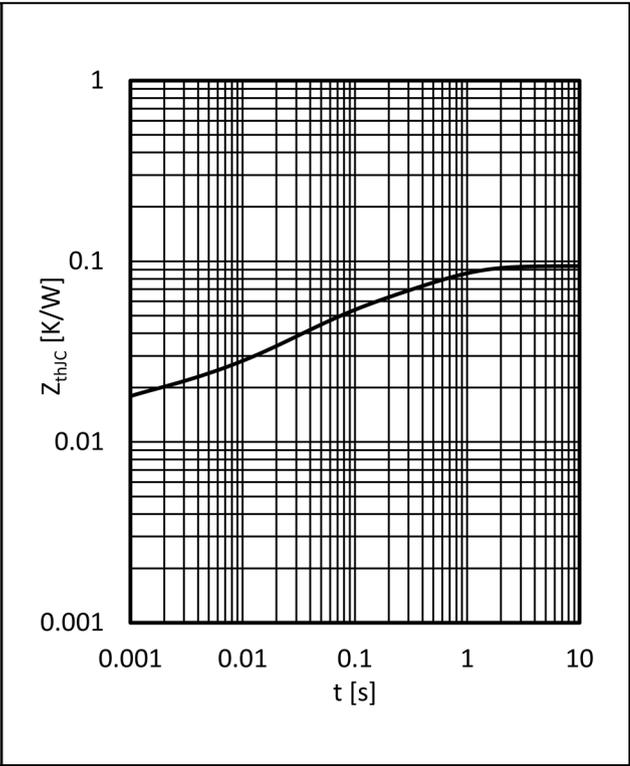





Transient thermal impedance IGBT, Inverter
 $Z_{thjC} = f(t)$

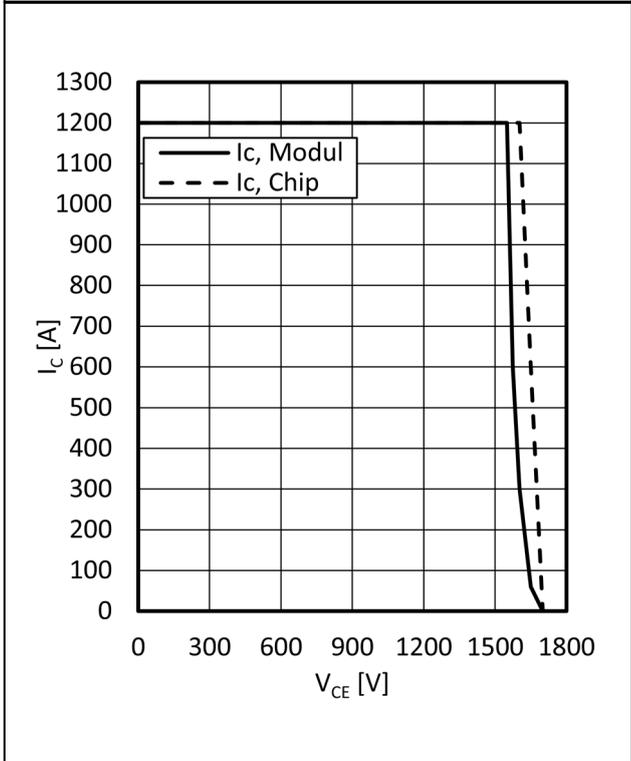

Reverse bias safe operating area IGBT, Inverter (RBSOA)
 $I_C = f(V_{CE})$ $V_{GE} = \pm 15V$ $R_{Goff} = 3.3\Omega$, $T_{vj} = 150^\circ C$

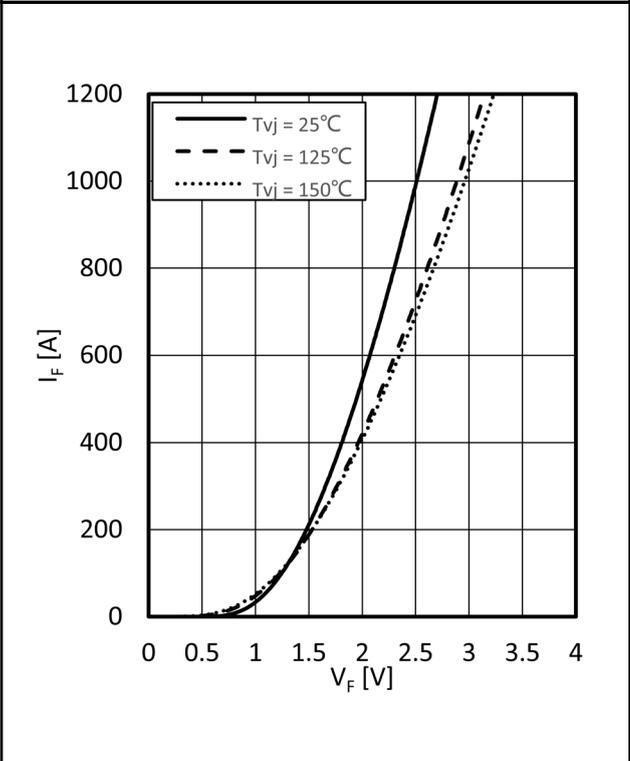

Forward characteristic of Diode, Inverter (typical)
 $I_F = f(V_F)$

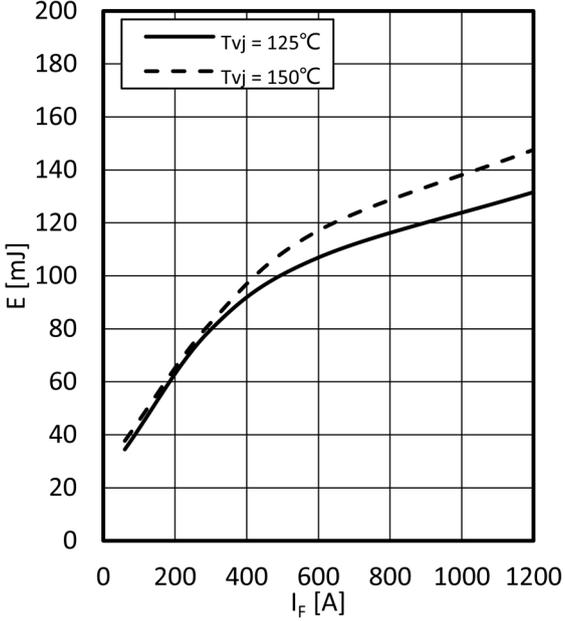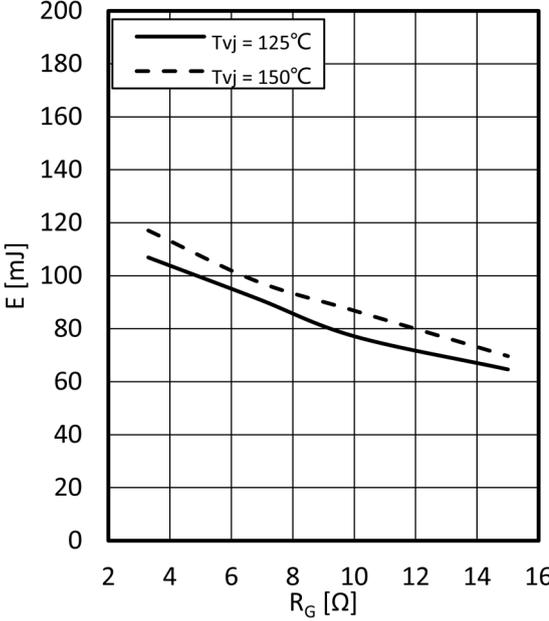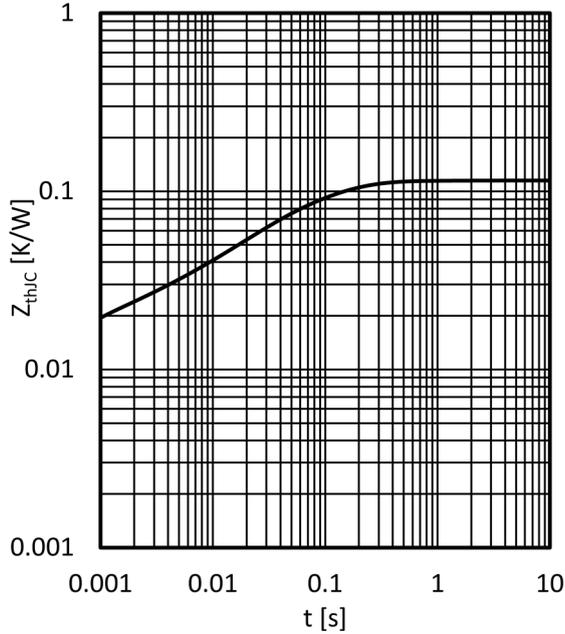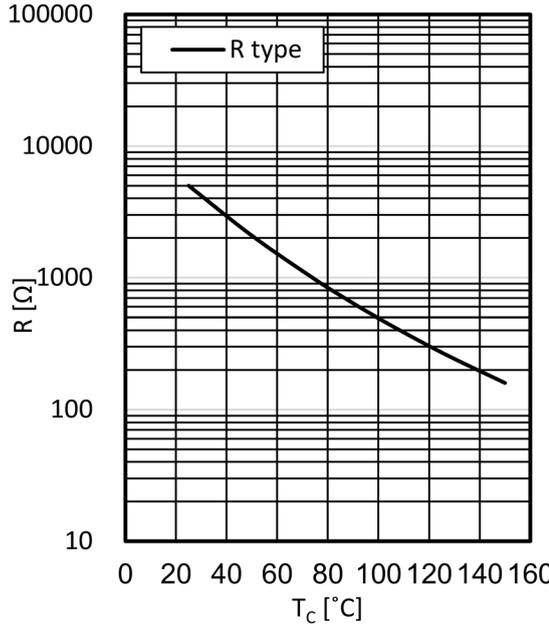	
<p>Switching losses Diode, Inverter (typical) $E_{rec} = f(I_F) R_{Gon} = 3.3 \Omega, V_{CC} = 900V$</p>	<p>Switching losses Diode, Inverter (typical) $E_{rec} = f(R_G) I_F = 600 A, V_{CC} = 900V$</p>
	
<p>Transient thermal impedance Diode Inverter $Z_{thjC} = f(t)$</p>	<p>NTC-Thermistor-temperature characteristic (typical) $R=f(T)$</p>

9. Circuit Diagram

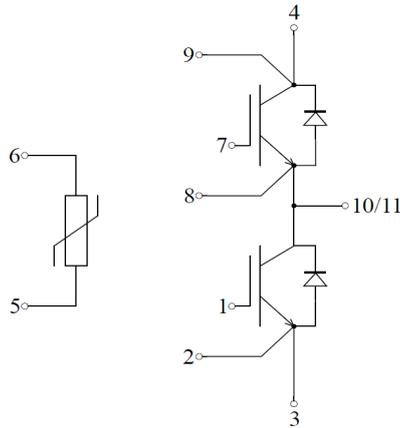


Figure 3

10. Package Outlines

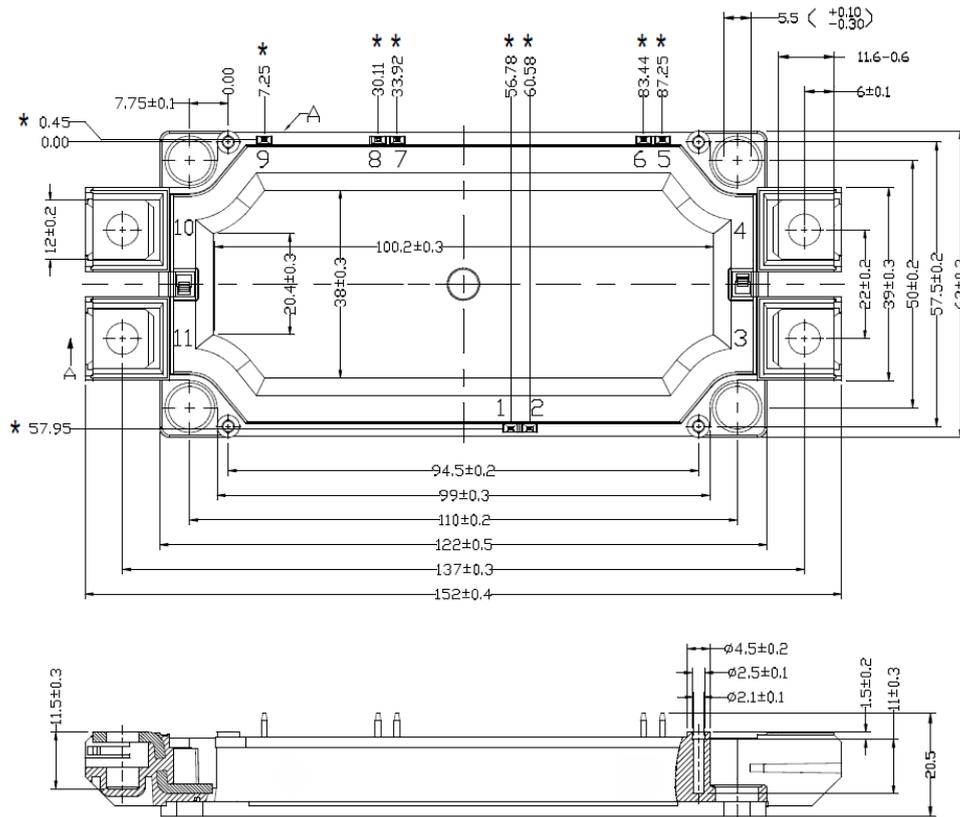


Figure 4